


Brand	Root
	SZ...

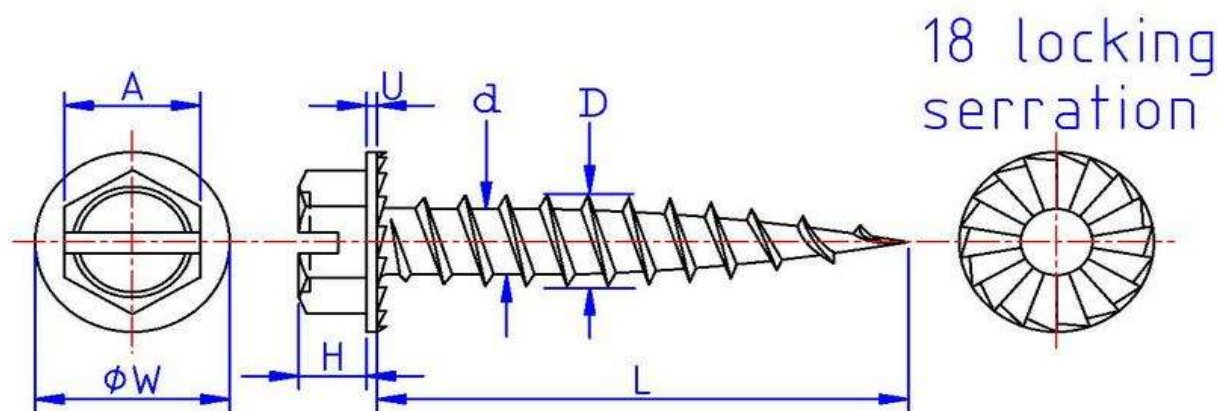

unit: INCH

L LENGTH TOLERANCE	≤ 1"	± 0.03
	> 1"	± 0.05

FULL THREAD

SCREW SIZE		W WASHER DIAM.	A ACROS FLAT	H HEAD HEIGHT	U WASHER THICKNESS	d MINOR DIAM.	D THREAD DIAM.	THREAD PER INCH	Min. Torsional Strength Lb/Inch
# 6	Min	0.322	0.244	0.080	0.015	0.096	0.136	18	24
	Max	0.348	0.250	0.093	0.025	0.102	0.141		
# 7	Min	0.322	0.244	0.080	0.017	0.108	0.152	16	30
	Max	0.348	0.250	0.093	0.029	0.114	0.158		
# 8	Min	0.322	0.244	0.096	0.019	0.116	0.162	15	39
	Max	0.348	0.250	0.110	0.031	0.123	0.168		
# 10	Min	0.384	0.305	0.105	0.019	0.126	0.188	12	48
	Max	0.414	0.312	0.120	0.031	0.133	0.194		

Hex/Washer Head with 18 locking Serration, Slotted Drive, Self-Piercing Screw Type-S, Zinc Plated
with a needle sharp point

Root= Sheet metal screw Zinc

Bulk Label Description:

English: HEX/WASHER HEAD WITH SERRATIONS, SHEET METAL SCREW, TYPE-S, ZINC

French: VIS À TÔLE, TÊTE HEX/RONDELLE AVEC SÉRRATIONS, TYPE-S, ZINC

Spanish:

Date: 10 février 2020

Done by: P.B.