

SCORPION PRODUCT CATALOG

DRYWALL, FRAMING, DECK AND ACOUSTICAL FASTENERS

Page 18-19

Page 19 Page 19

Page 20-21

Page 22 Page 23



TABLE OF CONTENTS

TABLE OF CONTENTS		
Scorpion Categories Fastener Selector Guide Scorpion Color Guide	Page 3 Page 3 Page 4	Stainless Steel Type ST 305 Stainless Steel Exterior Screw Stainless 305 Trim Head Deck and Fence Screw Painted Trim Head Stainless 305 Screw
Bugle Head Drywall Laminator Screw Type HT Bugle Head Drywall Screw Bugle Head Construction Screw Bugle Head Construction Screw Flat Head Interior Grade Construction Screw Light Gauge Metal Framing (25-20 ga.) Type S/P Pan Head Framing Screw Type S/P Low Profile Pan Head Framing Screw Type S/P Bugle Head Drywall Screw, Gray Phosphate Type S/P Bugle Head Drywall Screw, Jinc Type SST Bugle Head Drywall Screw Type SST Bugle Head Drywall Screw Type SST Bugle Head Drywall Screw Type SYP Lath Head Screw Type SPL Lath Head Screw	Page 5-6 5 5 6 Page 6-8 6 6 7 7 7 7 8	Driver Accessories Nails Type CC Cement Coated Smooth Shank Acoustical Fasteners Acoustical Drill Point Eye Lag Screw Acoustical Eye Lag Screw Acoustical Pierce Point Eye Lag Screw Acoustical Eye Lag Pole Tension Pins Wedge Anchor SpringShot Scorpion 2 Hole Angle Brackets Acoustical Pre-Tie Hanger Wire Acoustical Straight Wire
Type SPTR Trim Head Screw Heavy Gauge Metal (20-12 ga.) Type D/P Framing Screw, Clear Zinc Type D/P Framing Screw, Gray Phosphate Type D/P Low Profile Pan Head Framing Screw Type D/P Super-Tek Framing Screw Type D/P Low Profile Super-Tek Framing Screw Type D/P Drywall Screw Type D/P Drywall Screw Type D/P Drywall Screw Type D/P Drywall Screw Type D/P Lath Head Drywall Screw Type D/P Lath Head Drywall Screw Type D/P Drywall Trim Head Screw	Page 8-10 8 8 8 8 9 9 9 10 10	Acoustical Fence Staples Galvanized Acoustical Spool Wire Acoustical U-Hank Wire Rivets EZ Framing Collars Coatings and Finishes
Cement Board to Wood & Metal Type INSP Indenter High-Low Cement Board Screw Type BBSP Wafer Head Backer Board Screw Type INDP Indenter Cement Board Screw	Page II	
Heavy Gauge Metal Framing Type T2H Hex Washer Head Framing Screw Type T2P Pan Head Framing Screw Type T3P Pan Head Framing Screw Type T3H High Hex Head Framing Screw Type T3H Hex Washer Head Framing Screw Type T3H Hex Washer Head Framing Screw Type T4H Hex Head Framing Screw Type T5H Hex Head Framing Screw	Page 12-14 12 12 12 12 13 13 13	
Wood to Metal PlyLite® Screw Type T3PB Bugle Head PHB Sheathing Screw Type T3PF Flat Head Winged Sheathing Screw Type T3PW Flat Head Winged Sheathing Screw	Page 14-16 14 15 15 15	

15

16 16 16

17

Page 17

Hex Head Neoprine Washer Metal Siding Screw

Type XT Flat Head Exterior Deck and Fence Screw
Type XT Trim Head Exterior Deck and Fence Screw

Wood to Wood

T3H Hex Neoprene Washer Head Metal Sheathing Screw
Type T4PF Flat Head Winged Sheathing Screw
Type T5PF Flat Head Sheathing Screw



SELF DRILLING FASTENERS SELECTOR GUIDE



PERFORMANCE RANGE				
SCREW DIAMETER	POINT NUMBER	RANGE	MAXIMUM	
8	2	.035100	1/8	
10	3	.110175	3/16	
12	3	.110210	3/16	
14	3	.110210	3/16	
12	4	.175250	1/4	
12	5	.250500	1/2	

			"sco	RPION QUICK-	·PICK™"		
				N FROM GROUP () . When approaching			
		20 to 20	18-18	16-16	4 to 4	14-12	
A	GAUGE OF STEEL APPLICATION	20 to 20	18-16	16-14	14 to 12	12-12	STRUCTURAL TO 1/2
_		#8 DIA.	#10 DIA.	#12 DIA.		#12 DIA.	#12 DIA.
В	USE SCREW	2 POINT	3 POINT	3 POINT	3 POINT	4 POINT	5 POINT

			SH	EET STEEL G	GAUGE				
GAUGE NO.	25	20	18	16	14	12	10	1/4	I/2
DECIMAL EQUIVALENT	0.019	0.035	0.045	0.057	0.071	0.102	0.124	0.250	0.500

Self Drilling fasteners listed are stock sizes. Specialty styles, lengths, and finishes are available.



SCORPION COLOR GUIDE ★ One (I) and Five (5) pound packs are estimated quantity piece counts. **Coarse Thread** Type HT (Coarse thread) drywall fasteners for wood studs and wood to wood applications. Type S/P — Fine Thread Type S/P (Fine Thread) drywall fasteners for light gauge metal studs and general purpose fastening up to 20 gauge. Type SST[™] — SuperThread Type SST (SuperThread) drywall - ARREGREGATE THE PROPERTY OF fasteners system for wood and metal studs up to 20 gauge. Type D/P — Drill Point Drywall Type D/P (Drill Point) drywall fasteners for metal studs up to **Self Drilling Construction** General construction fasteners for \\. steel up to I/2-in thick. **Ceramic Coated** Type XT (Ceramic Coated) fasteners for outdoor use in fence and decking. **Stainless Steel** Type ST (Stainless Steel) fasteners for outdoor use in fence and decking. Acoustical Ammuni > 0 Acoustical fasteners for attaching ceilings.



COARSE THREAD

Bugle Head Drywall Laminator Screw 🔷



COARSE THREAD Drywall to Drywall



For temporary fastening of gypsum to gypsum.

- No. 2 Phillips recess
- Bugle head
- Coarse thread

Coating: Gray phosphate

Bit: ZP2 (No. 2 Phillips)


SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
10 x 1-1/2-in	LAM / 5,000	LAMCP / 500	LAMFP / 675	LAMPP / 135

Use with Grabber drywall adhesive, item number: GDWAW

Type HT Bugle Head Drywall Screw 🔸







- No. 2 Phillips recess Bugle head
- Coarse thread

Coating: Gray phosphate

Bit: ZP2 (No. 2 Phillips)

COARSE THREAD Drywall to Wood

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
6 x I-in	HT100 / 10,000	HTI00CP / 1,000	HT100FP / 1,650	HTIOOPP / 330
6 x I-I/8-in	HTII8 / 10,000	HTII8CP / 1,000	HTI18FP / 1,450	HT118PP / 290
6 x I-I/4-in	HTII4 / 8,000	HTII4CP / 1,000	HTI14FP / 1,325	HTII4PP / 265
6 x I-5/8-in	HTI58 / 5,000	HTI58CP / 500	HTI58FP / 1,100	HTI58PP / 220
6 x 2-in	HT200 / 3,500	HT200CP / 500	HT200FP / 900	HT200PP / 180
6 x 2-1/4-in	HT2I4 / 3,000	HT214CP/350	HT214FP / 750	HT214PP / 150
8 x 2-1/2-in	HT212 / 2,500	HT212CP / 250	HT212FP / 550	HT212PP / 110
8 x 3-in	HT300 / 2,000	HT300CP / 250	HT300FP / 450	HT300PP / 90
10 x 3-1/2-in	HT312 / 1,000	HT312CP / 200	HT312FP / 275	HT312PP / 55
10 x 4-in	HT400 / 1,000	HT400CP / 200	HT400FP / 250	HT400PP / 50

Bugle Head Construction Screw







Designed for attaching gypsum board to wood studs, and general purpose wood to wood applications

- No. 2 Phillips recess
- Bugle head
- Coarse thread

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

COARSE THREAD Drywall to Wood

SIZE	BULK ITEM NO/PCS
6 x I-I/4-in	HTI14Z / 8,000
6 x I-5/8-in	HTI58Z / 5,000
6 x 2-in	HT200Z / 3,500
8 x 2-1/2-in	HT212Z / 2,500
8 x 3-in	HT300Z /2,000



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Bugle Head Construction Screw







Designed for attaching gypsum board to wood studs, and general purpose wood to wood applications

- No. 2 Phillips recess Bugle head
- Coarse thread

Coating: Yellow Zinc

Bit: ZP2 (No. 2 Phillips)

COARSE THREAD Drywall to Wood

SIZE	BULK ITEM NO/PCS
6 x I-1/4-in	HTYZII4 / 8,000
6 x 1-5/8-in	HTYZI58 / 5,000
6 x 2-in	HTYZ200 / 3,000
8 x 2-1/2-in	HTYZ212 / 2,500
8 x 3-in	HTYZ300 / 2,000





Flat Head Interior Grade Construction Screw



COARSE THREAD Wood to Wood



Designed for attaching wood to wood studs, and general purpose wood to wood applications

- No. 2 Square recess Flat head
- Coarse thread
- Type I7 Point

Coating: Clear Zinc

Bit: ZSQ2 (No. 2 Square)

SIZE	BULK ITEM NO/PCS
8 x 3/4-in	HT8034Z / 10,000
8 x I-in	HT8100Z / 13,000
8 x I-I/4-in	HT8114Z / 8,000
8 x I-I/2-in	HT8112Z / 6,000
8 x I-3/4-in	HT8134Z / 4,000
8 x 2-in	HT8200Z / 3,500
8 x 2-1/4-in	HT8214Z / 3,000
8 x 2-1/2-in	HT8212Z / 2,500
8 x 3-in	HT8300Z / 2,000



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

LIGHT GAUGE METAL FRAMING

Type S/P Pan Head Framing Screw ◆







Type S/P light gauge steel framing screws for metal framing up to 20 gauge.

- No. 2 Phillips recess
- Pan head
- · Serration under head
- Fine thread


Coating: Gray Phosphate

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
7 x 7/16-in	SP716 / 15,000	SP716CP / 1,500	SP7I6FP / 1,900	SP716PP / 380



Type S/P Low Profile Pan Head Framing Screw





- No. 2 Phillips recess
- Low profile pan head
- Fine thread
- Sharp point

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

FINE THREAD Light Gauge Metal to Metal



Type S/P Bugle Head Drywall Screw ◆



FINE THREAD Drywall to Wood or Light Gauge Metal



Type S/P fine thread screws designed for attaching gypsum board and other materials up to 20 gauge metal studs.

- No. 2 Phillips recessBugle headFine thread

- Sharp point

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
6 x I-in	SPI00 / 10,000	SPIOOCP / 1,000	SPIOOFP / 1,650	SPIOOPP / 330
6 x I-I/8-in	SPII8 / 10,000	SPII8CP / 1,000	SPII8FP / 1,450	SPII8PP / 290
6 x I-I/4-in	SPII4 / 8,000	SPII4CP / 1,000	SPII4FP / 1,325	SPII4PP / 265
6 x I-5/8-in	SPI58 / 5,000	SPI58CP / 500	SPI58FP / 1,100	SPI58PP / 220
6 x 2-in	SP200 / 3,500	SP200CP / 500	SP200FP / 900	SP200PP / 180
6 x 2-1/4-in	SP214 /3,000	SP214CP / 350	SP2I4FP / 750	SP2I4PP / I50
8 x 2-1/2-in	SP212 / 2,500	SP212CP / 250	SP212FP / 550	SP2I2PP / II0
8 x 3-in	SP300 / 2,000	SP300CP / 250	SP300FP / 450	SP300PP / 90
10 x 3-1/2-in	SP312 / 1,000	SP312CP / 200	SP312FP / 275	SP312PP / 55
10 x 4-in	SP400 / 1,000	SP400CP / 200	SP400FP / 250	SP400PP / 50




Type S/P Bugle Head Drywall Screw 🔸



FINE THREAD Drywall to Wood or Light Gauge Metal





ioi attaciiiig gypsuiii boait	u and other
materials up to 20 gauge m	netal studs.

- No. 2 Phillips recess • Bugle head
- Fine thread
- Sharp point

Coating: Zinc

Bit: ZP2 (No. 2 Phillips)

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
6 x I-in	SPIOOZ / 10,000	SPIOOZCP / 1,000	SPIOOZFP / 1,650	SPIOOZPP / 330
6 x I-I/4-in	SPII4Z / 8,000	SPII4ZCP / 1,000	SPII4ZFP / 1,325	SPII4PP / 265

Type SST Bugle Head Drywall Screw 🔷



SUPERTHREAD Drywall to Wood or Light Gauge Metal



Type SST Scorpion Superthread screws are designed for attaching gypsum boards to wood or light gauge steel studs up to 20 gauge. This special alternating thread combining coarse and fine thread increases holding power and reduces strip-outs.

- No. 2 Phillips recess
- Bugle head
- Scorpion Superthread
- High-Low thread

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

	•	• •		
SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
6 x 3/4-in	SST034 / 12,000	SST034CP / 1,500	SST034FP / 2,125	SST034PP / 425
6 x I-in	SSTIOO / 10,000	SSTIOOCP / 1,000	SSTIOOFP / 1,625	SSTIOOPP / 325
6 x I-I/4-in	SSTII4 / 8,000	SSTII4CP / 1,000	SSTII4FP / 1,300	SSTII4PP/260
6 x I-5/8-in	SST158 / 5,000	SSTI58CP / 500	SSTI58FP / 1,075	SSTI58PP / 215
6 x 2-in	SST200 / 3,500	SST200CP / 500	SST200FP / 875	SST200PP / 175
7 x 2-1/4-in	SST214 /3,000	SST2I4CP / 350	SST214FP / 700	SST2I4PP / 140
8 x 2-1/2-in	SST212 / 2,500	SST212CP / 250	SST212FP / 525	SST212PP / 105
8 x 3-in	SST300 / 2,000	SST300CP / 250	SST300FP / 425	SST300PP / 85
10 x 3-1/2-in	SST312 / 1,000	SST312CP / 200	SST312FP / 275	SST312PP / 55
10 x 4-in	SST400 / 1,000	SST400CP / 200	SST400FP / 250	SST400PP / 50
10 x 4-1/2-in	SST4I2 / 1,000	SST4I2CP / I50	SST412FP / 220	
10 x 5-in	SST500 / 1,000	SST500CP / 150	SST500FP / 200	
10 x 6-in	SST600 / 1,000		SST600FP / 165	

Type SSTZ Bugle Head Drywall Screw



SUPERTHREAD Drywall to Wood or Light Gauge Metal

BULK ITEM NO/PCS

SSTZII4 / 8,000

SSTZ158 / 5,000

SSTZ200 / 3,500

SSTZ212 / 2,500

SSTZ300 / 2,000



Type SST Scorpion Superthread screws are designed for attaching gypsum boards to wood or light gauge steel studs up to 20 gauge. This special alternating thread combining coarse and fine thread increases holding power and reduces strip-outs.

- No. 2 Phillips recessBugle head
- Scorpion Superthread
- High-Low thread

8 x 3-in

6 x I-I/4-in

6 x I-5/8-in

8 x 2-1/2-in

6 x 2-in

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

COUNT PK ITEM NO/PCS

SSTZII4CP / 1,000

SSTZI58CP / 500

SSTZ200CP / 500

SSTZ212CP / 250

SSTZ300CP / 350

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

Type S/P Lath Head Screw 🔷



Type S/P lath head fine thread screws are designed for attaching wire lathing, framing and other materials to metal studs up to 20 gauge metal to metal.

- · No. 2 Phillips recess
- Lath head (truss)
- · Fine thread

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

FINE THREAD Metal to Metal







Type SPTR Trim Head Screw 🔷



Type SPTR fine thread trim head screws are designed for attaching wood, metal, plastic finish trim to wood or light gauge metal (up to 20 ga.).

- No. I Square recess
- Trim head
- Fine thread

Coating: Gray Phosphate

Bit: ZSQI (No. I Square)

FINE THREAD Wood to Wood or Light Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
6 x I-5/8-in	SPTRI58 / 5,000	SPTRI58CP / 500	SPTRI58FP /1,300	SPTRI58PP / 260
6 x 2-1/4-in	SPTR214 / 3,000	SPTR214CP / 350	SPTR214FP / 900	SPTR214PP / 180
8 x 3-in	SPTR300 / 2,000	SPTR300CP / 250	SPTR300FP/500	SPTR300PP / 100

HEAVY GAUGE METAL

Type D/P Framing Screw 🔸





Type D/P Drill Point Framer for attaching heavier gauge steel framing.

- No. 2 Phillips recess
- Pan head
- Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal


SIZE 6 x 7/16-in	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS DPZ716CP / 1.500	5-Ib ITEM NO/PCS DPZ716FP / 1.900	DPZ716PP / 380
	DPZ716 / 15.000			



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type D/P Framing Screw 🔸





- No. 2 Phillips recess
- Pan head
- Drill point

Coating: Gray phosphate

Bit: ZP2 (No. 2 Phillips)


DRILL POINT Metal to Heavy Gauge Metal

6 x 7/16	5-in DP716 / 15.000	DP716CP / 1 500	DP716FP / 1 900	DP716PP / 380
SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS

Type D/P Low Profile Pan Head Framing Screw







- No. 2 Phillips recess
- Low profile pan head
- Drill point

Coating: Gray phosphate

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal



Type D/P Super-Tek Framing Screw



Type D/P Super-Tek Drill Point are designed for extra heavy gauge metal framing.

- No. 2 Phillips recess
- · Pan head
- Drill point .125 head height

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal










Type D/P Low Profile Super-Tek Framing Screw



DRILL POINT Metal to Heavy Gauge Metal





- No. 2 Phillips recess
 Low profile pan head
- Drill point
- .100 head height

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS
10 x 5/8-in	DPZ058L/8,000	DPZ058LCP / 1,150	DPZ058LFP / 1,150



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type D/P Drywall Screw





Type D/P Drill Point fasteners are designed for attaching gypsum board and other materials to heavier gauge metal

- studs. Bugle head No. 2 Phillips. • No. 2 Phillips recess
- Bugle head
- Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Drywall to Heavy Gauge Metal


SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
6 x I-in	DPZIOO / 10,000	DPZI00CP / 1,000	DPZIOOFP / 1,500	DPZIOOPP / 300
6 x I-I/4-in	DPZII4 / 8,000	DPZII4CP / 1,000	DPZII4FP / 1,250	DPZII4PP / 250
6 x 1-5/8-in	DPZI58 / 5,000	DPZI58CP / 500	DPZI58FP / 1,000	DPZI58PP / 200
6 x I-7/8-in	DPZI78 / 4,000	DPZI78CP / 500	DPZI78FP / 875	DPZI78PP / 175
8 x 2-3/8-in	DPZ238 /3,000	DPZ238CP/350	DPZ238FP / 525	DPZ238PP / 105
8 x 2-5/8-in	DPZ258 / 2,500	DPZ258CP / 250	DPZ258FP / 475	DPZ258PP / 95
8 x 3-in	DPZ300 / 2,000	DPZ300CP / 250	DPZ300FP / 425	DPZ300PP / 85
10 x 3-1/2-in	DPZ312 / 1,000	DPZ312CP / 200	DPZ312FP / 275	DPZ312PP / 55
10 x 4-in	DPZ400 / 1,000			
10 x 5-in	DPZ500 / 1,000			
10 x 6-in	DPZ600 / 1,000			



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.


Type DPXT Sheathing Exterior Screw





DRILL POINT Sheathing to Heavy Gauge Metal




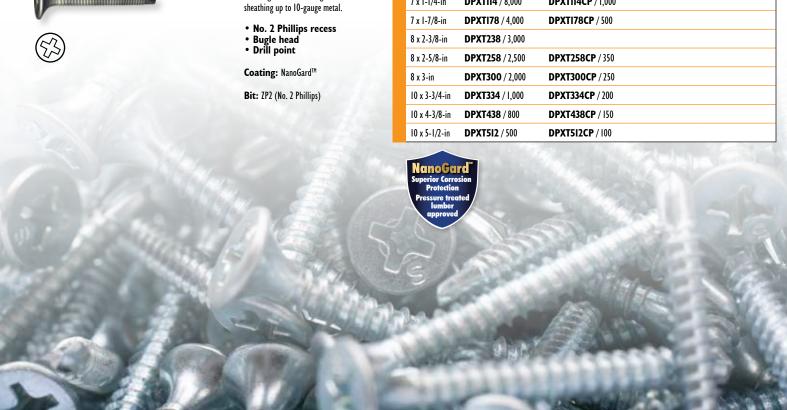



Type D/P Drywall Screw





- No. 2 Phillips recess
- Bugle head
- Drill point

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Drywall to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS
6 x I-in	DPI00 / 10,000	DPIOOCP / I,000	DPIOOFP / 1,500
6 x I-I/4-in	DPII4 / 8,000	DPII4CP / 1,000	DPII4FP / 1,250
6 x I-5/8-in	DPI58 / 5,000	DPI58CP / 500	DPI58FP / 1,000
6 x I-7/8-in	DPI78 / 4,000	DPI78CP / 500	DP178FP / 875
8 x 2-3/8-in	DP238/3,000	DP238CP / 350	DP238FP / 525
8 x 2-5/8-in	DP258 / 2,500	DP258CP / 250	DP258FP / 475
8 x 3-in	DP300 / 2,000	DP300CP / 250	DP300FP / 425

Type D/P Lath Head Drywall Screw









- designed for attaching wire lath to heavier gauge metal studs.
- No. 2 Phillips recess • Lath head
- Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Lath to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
8 x 3/4-in	DPLH034 / 8,000	DPLH034CP / 500	DPLH034FP /I,050	DPLH034PP /210
8 x I-I/4-in	DPLHII4 / 5,000	DPLHII4CP / 500	DPLHII4FP / 750	DPLHII4PP / 150
8 x I-5/8-in	DPLHI58 / 4,000			
8 x 2-1/4-in	DPLH214 / 2,500	DPLH214CP / 350	DPLH214FP /500	DPLH214PP / 100
8 x 2-1/2-in	DPLH212 / 2,500			
10 x 3/4-in	DPLHI0034 / 5,000			






WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type DPTR Drywall Trim Head Screw







- No. I Square recess
- Trim head
- Drill point

Coating: Clear Zinc Bit: ZSQI (No. I Square)

DRILL POINT Trim to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
7 x I-5.8-in	DPTRI58 / 5,000	DPTRI58CP / 500	DPTRI58FP / 900	DPTRI58PP / 180
7 x 2-1/4-in	DPTR214 / 3,000	DPTR214CP / 350	DPTR214FP / 700	DPTR2I4PP / 140
8 x 3-in	DPTR300 / 2,000	DPTR300CP / 250	DPTR300FP / 450	DPTR300PP / 90







CEMENT BOARD

Type INSP Indenter High-Low Cement Board Screw HIGH-LOW THREAD Cement Board to Wood or Light Gauge Metal





Type INSP Indenter High-Low cement board fasteners are designed for attaching cement type boards to wood or (up to 20 gauge) metal stud. Indenter screws have a large wafer head with countersinking nibs that allows flush seating.

The screws offer an increased bearing surface that provides greater pullthrough resistance. It is the ideal attachment of cement board in interior high moisture areas.

- No. 2 Phillips recess
- Special wafer head
- High-Low thread
- Spoon point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

			•
SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	ITEM NO/100 COUNT PK
8 x I-I/4-in	INSPII4 / 5,000	INSPII4CP / 500	INSPII4C / 100
8 x I-5/8-in	INSPI58 / 4,000	INSPI58CP / 500	INSP158C / 100
8 x 2-1/4-in	INSP214 / 2,500	INSP214CP / 350	INSP214C / 100



Type BBSP Wafer Head Backer Board Screw





Type BBSP wafer head hi-low thread screws are designed for attaching cement board and high density backer board to wood or light gauge metal (up to $20\,$ gauge). Countersinking nibs and wafer head seat flush.

- No. 2 square recessSpecial wafer head
- Hi-Lo thread
- Spoon point

Coating: NanoGard™

Bit: ZSQ2 (No. 2 Square)

HIGH-LOW THREAD Backer Board to Wood or Light Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	ITEM NO/100 COUNT PK
10 x 1-1/4-in	BBSPII4 / 3,500	BBSPII4CP / 500	BBSPII4C / 100
10 x 1-5/8-in	BBSPI58 / 4,000	BBSPI58CP / 500	BBSPI58C / 100



Type INDP Indenter Cement Board Screw 🔸



Type INDP Indenter drill point cement board fasteners are designed for attaching cement board to metal (up to 12 gauge). Indenter screws have a large wafer head with countersinking nibs that allows flush seating.

- No. 2 Phillips recessSpecial wafer head
- Drill point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Cement Board to Heavy Gauge Metal







HEAVY GAUGE METAL FRAMING

Type T2H Hex Washer Head Framing Screw 🔸



DRILL POINT Metal to Heavy Gauge Metal



Type T2H hex washer head drill point screws are designed for heavy gauge metal to metal framing applications. Performance range is .035 to .100.

- · Hex washer head
- I/4 Drive
- #2 Drill point

Coating: Clear Zinc

Nut Setter: MSHLI4 (Hex)


	, ,		
SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
8-18 x 1/2-in	T2HW8012 / 10,000	T2HW8012M / 5,000	T2HW8012S / 500
8-18 x 3/4-in	T2HW8034 / 10,000	T2HW8034M / 5,000	T2HW8034S / 500
8-18 x 1-in	T2HW8100 / 8,000	T2HW8I00M / 4,000	T2HW8100S / 400
8-18 x 1-1/4-in	T2HW8II4 /5,000	T2HW8II4M / 2,500	T2HW8114S / 250
8-18 x 1-1/2-in	T2HW8II2 / 5,000	T2HW8II2M / 2,500	T2HW8112S / 250



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T2P Pan Head Framing Screw •





recess. Performance range is .035 to .100.

- Pan head
- No. 2 Phillips recess
- #2 Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
8-18 x 1/2-in	T2PP8012 / 10,000	T2PP8012M / 5,000	T2PP8012S / 500
8-18 x 3/4-in	T2PP8034 / 10,000	T2PP8034M / 5,000	T2PP8034S / 500
8-18 x 1-in	T2PP8100 / 8,000	T2PP8I00M / 4,000	T2PP8100S / 400
8-18 x 1-1/4-in	T2PP8114 / 5,000	T2PP8II4M / 2,500	T2PP8II4S / 250
8-18 x 1-1/2-in	T2PP8II2 / 5,000	T2PP8II2M / 2,500	T2PP8II2S / 250



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T3P Pan Head Framing Screw



Type T3P pan head drill point screws are designed for heavy gauge metal to metal framing applications. These screws feature a drill point and #2 Phillips recess. Performance range is .110 to .175.

- Pan head
- No. 2 Phillips recess
- Drill point
- #3 Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal





WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T3HH High Hex Head Framing Screw



DRILL POINT Metal to Heavy Gauge Metal



Type T3H drill point screws are designed for heavy gauge metal to metal framing applications. High Hex Head for greater bit engagement. These screws feature a drill point.

10 = performance range of .110 to .175 12 = performance range of .110 to .210

High Hex Head

• #3 Drill point

SIZE BULK ITEM NO/PCS 10 x 3/4-in T3HHW10075 / 5,000 10 x 3/4-in T3HHW10034 / 8,000 10 x 3/4-in T3HHW100345M / 5,000 12 x 3/4-in T3HHWI2034 / 1,000



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Nut Setter: MSHL516 (Hex)



Type T3H Hex Washer Head Framing Screw



DRILL POINT Metal to Heavy Gauge Metal



Type T3H hex washer head drill point screws are designed for heavy gauge metal to metal framing applications. Performance range is .110 to .210.

· Hex washer head • 5/I6 Drive

• #3 Drill point

Coating: Clear Zinc

Nut Setter: MSHL516 (Hex)

	Tietal to licary daug		
SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
10-16 x 1/2-in	T3HW10012 / 10,000	T3HWI0012M / 5,000	T3HW10012S / 250
10-16 x 3/4-in	T3HW10034 / 8,000	T3HW10034M / 4,000	T3HW10034S / 400
10-16 x 1-in	T3HW10100 / 5,000	T3HWI0I00M / 2,500	T3HW10100\$ / 250
10-16 x 1-1/2-in	T3HWI0II2/3,000	T3HWI0II2M / 1,500	T3HWI0II2S / 150
10-16 x 2-in	T3HWI0200 / 2,500	T3HWI0200M / 1,250	T3HWI0200S / 100
10-16 x 2-1/2-in	T3HWI0212 / 2,000		
10-16 x 3-in	T3HWI0300 / 1,500		
12-14 x 3/4-in	T3HWI2034 / 5,000	T3HWI2034M / 2,500	T3HW12034S / 250
12-14 x 1-in	T3HW12100 / 4,000	T3HWI2I00M / 2,000	T3HW12100S / 200
12-14 x 1-1/4-in	T3HWI2II4/3,000	T3HW12114M / 1,500	T3HW12114S / 150
12-14 x 1-1/2-in	T3HWI2II2/3,000	T3HW12112M / 1,500	T3HW12112S / 150
12-14 x 2-in	T3HWI2200 / 2,000	T3HWI2200M / 1,000	T3HW12200S / 100
12-14 x 3-in	T3HWI2300 / 1,000		
12-14 x 2-1/2-in	T3HW12212 / 1,000	T3HW12212M / 1,000	T3HW12212S / 50
14-14 x 3/4-in	T3HWI4034 / 4,000	T3HWI4034M / 2,000	T3HWI4034S / 200
14-14 x 1-in	T3HWI4I00 / 3,000	T3HW14100M / 1,500	T3HW14100S / 150
14-14 x 1-1/4-in	T3HWI4II4/2,000	T3HWI4II4M / 1,000	T3HW14I14S / 100
14-14 x 1-1/2-in	T3HWI4II2 / 2,000	T3HW14112M / 1,000	T3HWI4II2S / 100
14-14 x 2-in	T3HWI4200 / 1,500	T3HWI4200M / 750	T3HW14200S / 100
14-14 x 2-1/2-in	T3HW14212 / 1,000		
14-14 x 3-in	T3HWI4300 / 1,000	T3HW14300M / 500	T3HW14300S / 50
14-14 x 4-in	T3HWI4400 / 750		
14-14 x 5-in	T3HWI4500 / 500		
14-14 x 6-in	T3HWI4600 / 250		
	10-16 x 1/2-in 10-16 x 3/4-in 10-16 x 1-in 10-16 x 2-in 10-16 x 2-1/2-in 10-16 x 3-in 12-14 x 3/4-in 12-14 x 1-in 12-14 x 1-1/2-in 12-14 x 2-in 12-14 x 2-in 12-14 x 3/4-in 12-14 x 1-1/2-in 14-14 x 1-1/2-in 14-14 x 1-1/4-in 14-14 x 1-1/4-in 14-14 x 1-1/4-in 14-14 x 1-1/2-in 14-14 x 2-in 14-14 x 2-in 14-14 x 2-in 14-14 x 3/4-in 14-14 x 3/4-in 14-14 x 1-1/2-in 14-14 x 3/4-in	10-16 x 1/2-in	10-16 x 1/2-in T3HW10012 / 10,000 T3HW10012M / 5,000 10-16 x 3/4-in T3HW10034 / 8,000 T3HW10034M / 4,000 10-16 x 1-in T3HW10100 / 5,000 T3HW10100M / 2,500 10-16 x 1-1/2-in T3HW10112 / 3,000 T3HW10112M / 1,500 10-16 x 2-in T3HW10200 / 2,500 T3HW10200M / 1,250 10-16 x 3-in T3HW10300 / 1,500 12-14 x 3/4-in T3HW12034 / 5,000 T3HW12034M / 2,500 12-14 x 1-1/4-in T3HW12100 / 4,000 T3HW12100M / 2,000 12-14 x 1-1/4-in T3HW12112 / 3,000 T3HW12112M / 1,500 12-14 x 2-in T3HW12200 / 2,000 T3HW12200M / 1,000 12-14 x 3-in T3HW12200 / 1,000 T3HW12212M / 1,000 12-14 x 3/4-in T3HW12212 / 1,000 T3HW12212M / 1,000 14-14 x 1-1/4-in T3HW1400 / 3,000 T3HW1400M / 1,500 14-14 x 1-1/2-in T3HW14114 / 2,000 T3HW14114M / 1,000 14-14 x 1-1/2-in T3HW14112 / 2,000 T3HW14112M / 1,000 14-14 x 2-in T3HW1412 / 1,000 T3HW14112M / 1,000 14-14 x 2-in T3HW14200 / 1,500 T3HW14200M / 750 14-14 x 3-in T3HW14200 / 1,500 T3HW14300M / 500 14-14 x 4-in T3HW14400 / 750 14-14 x 5-in T3HW14500 / 500



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T4H Hex Head Framing Screw



Type T4 hex head drill point screws are designed for heavy gauge metal to metal framing applications. These screws feature NanoGard exterior grade coating for improved corrosion resistance. Performance range is .175 to .250.

- Hex head5/l6 Drive#4 Drill point

Coating: NanoGard™

Nut Setter: MSHL516 (Hex)

DRILL POINT Metal to Heavy Gauge Metal MINI PK ITEM NO/PCS BULK ITEM NO/PCS SHELF PK ITEM NO/PCS







Type T5H Hex Head Framing Screw



Type T5 hex head drill point screws are designed for heavy gauge metal to metal framing applications. These screws feature NanoGard exterior grade coating for improved corrosion resistance. Performance range is .250 to .500.

• Hex head • 5/I6 Drive

#5 Drill point
 Coating: NanoGard™

Nut Setter: MSHL516 (Hex)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
12-24 x 1-1/4-in	T5HW12114XT / 4,000	T5HW12114XTM / 2,000	T5HW12114XTS / 200
12-24 x 1-1/2-in	T5HW12112XT / 2500		
12-24 x 2-in	T5HW12200XT / 2,000	T5HWI2200XTM / 1,000	T5HW12200XTS / 100
12-24 x 2-1/4-in	T5PF12214XT / 1,500		
12-24 x 2-1/2-in	T5HW12212XT / 1,000		
12-24 x 3-in	T5HW12300XT / 1,000	T5HWI2300XTM / 750	T5HW12300XTS / 50
14 x 4-in	T5HW14400XT / 750		
14 x 6-in	T5HW14600XT /500		



WOOD TO METAL

PlyLite® Screw







plywood to (up to 20 gauge) steel studs quickly, easily and securely. With Plylite fasteners threaded points,

With Plylite lasteners threaded points, smooth shanks and countersinking nibs, the interior contractor will find fastening plywood to light gauge studs as easy as applying gypsum wallboard. Plylite innovative design reduces ride-up.

- No. 2 Phillips recess
- Flat head
- Threaded point

Coating: Yellow Zinc

SELF PIERCING POINT Plywood to Light Gauge Metal

SIZE	BULK ITEM NO/PCS	5-LB ITEM NO/PCS	I-LB ITEM NO/PCS	FOUR USE WITH
7 x I-I/2-in	GPLYI50 / 7,500	VBGLPLI50 / 1,155	XGPLYI50 / 232	3/8 - I-I/2-in PLYWOOD
7 x 2-in	GPLY200 / 5,000	VBGPLY200 / 954	XGPLY200 / 190	5/8 - 3/4-in PLYWOOD
7 x 2-3/4-in	GPLY275 / 3,000	VBGPLY275 / 718	XGPLY275 / 144	PLYWOOD OVER GYPSUM



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

A Grabber Construction Products item

* GRARRER PRODUCT COLOR CODING







Type T3PB Bugle Head PHB Sheathing Screw



PILOT POINT Sheathing to Heavy Gauge Metal



Type T3PB bugle head leader point screws are designed for attaching sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance.

- No. 2 & No. 3 Phillips recess
- Bugle head
 PHB Pilot point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS	GAUGE
8-18 x 1-15/16-in	T3PB8II5I6 / 4,000	T3PB8II5I6M / 2,000	T3PB8II5I6S / 200	20-18 ga
10-16 x 2-in	T3PBIO2 / 3,000	T3PBI02M / 1,500	T3PBIO2S / 150	20-16 ga
10- 16 x 3-5/8-in	T3PBI0358/1,000	T3PBI0358M / 500		20-16 ga



SIZE	SUBSTRATE	RECESS
8 - 18 x 1-15/16-in	1/4 - 3/4-in LUMBER	No. 2 PHILLIPS
10 - 16 x 2-in	3/8 - I-in LUMBER	No. 2 PHILLIPS
10 - 16 x 3-5/8-in	5/8 - 1-3/4-in LUMBER	No. 2 PHILLIPS

Type T3PF Flat Head Winged Sheathing Screw



DRILL POINT Plywood to Heavy Gauge Metal



Type T3PF flat head winged drill point screws are designed for attaching plywood and sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance. Performance range is lumber (3/8 to 3/4") to heavier gauge metal.

- No. 2 Phillips recess
- Flat head
- #3 Winged drill point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

SIZE BULK ITEM NO/PCS MINI PK ITEM NO/PCS SHELF PK ITEM NO/PCS GAL	UE




Type T3PW Flat Head Winged Sheathing Screw



DDILL DOINT of







Flat head

• #3 Winged drill point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

aı





Hex Head Neoprine Washer Metal Siding Screw



SHARP POINT Metal to Wood



Scorpion hex head high-low thread roofing fasteners are designed for attaching metal roofing and siding

- Hex head Neoprene washer
- Type I7 Point

Coating: NanoGard™

Nut Setter: MSHLI4 (Hex)

SIZE	BULK ITEM NO/PCS
10 x 1-in	T1710100WXT / 5,000
10 x 1-1/2-in	T1710112WXT /3,000
10 x 2-in	T1710200WXT / 2,000
10 x 2-1/2-in	T1710212WXT / I,000
10 x 3-in	TI7I0300WXT / I,000





T3H Hex Neoprene Washer Head Metal Sheathing Screw DRILL POINT Metal to Heavy Gauge Metal

Scorpion hex head fine thread sheathing screws are designed for attaching metal roofing

- Hex head Neoprene washer
- I/4 Drive
- Tek 3 Drill Point

Coating: NanoGard™


Nut Setter: MSHLI4 (Hex)

	, 0
SIZE	BULK ITEM NO/PCS
10 x 1-1/2-in	T3HW10112WXT / 3,000
12 x 3/4-in	T3HW12034WXT / 3,500
12 x 1-in	T3HW12100WXT / 3,000
12 x 1-1/4-in	T3HW12I14WXT / 2,500
12 x 1-1/2-in	T3HW12I12WXT / 2,000
12 x 2-in	T3HW12200WXT / I,500
12 x 2-1/2-in	T3HW12212WXT / 1,000
12 x 3-in	T3HW12300BWXT / 1,000
12 x 4-in	T3HW12400BWXT / I,000
14 x 2-1/2-in	T3HW14212WXT / 1,000
14 x 4-in	T3HW14400WXT / 750



Type T4PF Flat Head Winged Sheathing Screw







Type T4PF flat head Tek 4 winged drill point screws are designed for attaching plywood and sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance. Performance range is lumber (1/4 to 1") to 16 gauge steel up to .250 steel.

- No. 3 Phillips recess Flat head
- Tek 4 Winged drill point

Coating: NanoGard™

Bit: ZP3 (No. 3 Phillips)

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
12 - 24 x 2-in	T4PFI2200XT / 2,000	T4PFI2200XTM /I,000	T4PF12200XTS / 100
12 - 24 x 2-1/2-in	T4PFI22I2XT / 1,500	T4PFI22I2XTM / 750	T4PF12212XTS / 100
12 - 24 x 3-1/4-in	T4PFI23I4XT / I,000	T4PFI23I4XTM / 500	
14 - 20 x 2-3/4-in	T4PFI4234XT / I,000	T4PFI4234XTM / 500	T4PFI4234XTS / 100

MINI PK ITEM NO/PCS



SIZE

SIZE	SUBSTRATE
12 - 24 x 2-in	I/4 - I-in LUMBER
12 - 24 x 2-1/2-in	1/2 - 1 1/2-in LUMBER
12 - 24 x 3-1/4-in	I/2 - 2-in LUMBER
14 - 20 x 2-3/4-in	I/2 - I-I/2-in LUMBER


GAUGE

SHELF PK ITEM NO/PCS

Type T5PF Flat Head Sheathing Screw



DRILL POINT Sheathing to Heavy Gauge Metal BULK ITEM NO/PCS



Type T5PF flat head drill point screws are designed for attaching plywood and sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance. Performance range is lumber (1/4 to 1") to 16 gauge steel to .500 steel.

- No. 3 Phillips recess Flat head
- Tek 5 Drill point

Coating: NanoGard™


Bit: ZP3 (No. 3 Phillips)





WOOD TO WOOD

Type XT Flat Head Exterior Deck and Fence Screw ◆ COARSE THREAD Wood to Wood



Type XT coarse thread exterior deck screws are designed for pressure treated lumber applications. Flat head, square or star drive with countersinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates the need for pre-drilling in most cases. Scorpion Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star or square recess Flat head Coarse thread

- Type I7 point Draw-Tite™ shank

Coating: NanoGard™

Bits: 125T20S (Star 20) S2T25 (Star 25) ZSQ2 (No. 2 Square)

		LITE HOOG to Hoog			
	SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
	6 x I-I/4-in	TXTII4PAIL / 8,000	TXTII4CP / 1,000	TXTII4FP / 1,325	TXT114PP / 265
	6 x I-I/2-in	TXTII2PAIL / 5,000	TXTII2CP / 500	TXTII2FP / 1,150	TXTII2PP / 230
STAR 20	7 x 2-in	TXT200PAIL / 3,500	TXT200CP / 500	TXT200FP / 775	TXT200PP / 155
STAI	8 x 2-1/4-in	TXT2I4PAIL / 3,000	TXT2I4CP / 300	TXT2I4FP / 575	TXT2I4PP / 115
	8 x 2-1/2-in	TXT212PAIL / 2,500	TXT212CP / 250	TXT212FP / 525	TXT2I2PP / 105
	9 x 3-in	TXT300PAIL / 2,000	TXT300CP / 250	TXT300FP / 425	TXT300PP / 85
	10 x 3-1/2-in	TXT3I2PAIL / 1,000	TXT312CP / 200	TXT312FP / 275	TXT312PP / 55
STAR 25	10 x 4-in	TXT400PAIL / 1,000	TXT400CP / 150	TXT400FP / 250	TXT400PP / 50
ر د	10 x 5-in	TXT500PAIL / 1,000	TXT500CP / 100	TXT500FP / 195	
	6 x I-I/4-in	XTII4PAIL / 8,000	XTII4CP / 1,000	XTII4FP / 1,325	XTII4PP / 265
	6 x I-I/2-in	XTII2PAIL / 5,000	XTII2CP / 500	XTII2FP / 1,150	XTII2PP / 230
	7 x 2-in	XT200PAIL/3,500	XT200CP / 500	XT200FP / 775	XT200PP / 155
RE 2	8 x 2-1/4-in	XT2I4PAIL / 3,000	XT2I4CP / 300	XT2I4FP / 575	XT2I4PP / 115
SQUARE 2	8 x 2-1/2-in	XT2I2PAIL / 2,500	XT2I2CP / 250	XT212FP / 525	XT2I2PP / 105
	9 x 3-in	XT300PAIL / 2,000	XT300CP / 250	XT300FP / 425	XT300PP / 85
	10 x 3-1/2-in	XT312PAIL / 1,000	XT3I2CP / 200	XT312FP / 275	XT312PP / 55
	10 x 4-in	XT400PAIL / 1,000	XT400CP / 150	XT400FP / 250	XT400PP / 50
	10 x 5-in	XT500PAIL / 1,000	XT500CP / 100	XT500FP / 195	



Type XT Trim Head Exterior Deck and Fence Screw ◆ COARSE THREAD Wood to Wood

	Type XT coarse thread exterior deck	SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
AAAAA	screws are designed for use in wood and	∑ 7 x I-5/8-in	TXTTRI58PAIL /5,000	TXTTRI58CP / 500	TXTTRI58FP / 925	TXTTRI58PP / 185
	pressure treated lumber applications. Trim Head Star or square drive with	7 x 2-1/4-in	TXTTR2I4PAIL / 3,000	TXTTR2I4CP / 350	TXTTR2I4FP / 675	TXTTR2I4PP / 135
(کی	countersinking nibs. Deep thread for	≈ 8 x 3-in	TXTTR300PAIL /2,000	TXTTR300CP / 250	TXTTR300FP / 450	TXTTR300PP / 90
	greater holding power. Type 17 cutter point eliminates pre-drilling in most	7 x I-5/8-in	XTTRI58PAIL / 5,000	XTTRI58CP / 500	XTTRI58FP / 925	XTTRI58PP / 185
A A A A A A A A A A A A A A A A A A A	cases. Scorpion Draw-Tite shank pulls both wood members together for a secure	7 x 2-1/4-in	XTTR214PAIL /3,000	XTTR214CP / 350	XTTR214FP / 675	XTTR2I4PP / 135
	fastening job.	8 x 3-in	XTTR300PAIL /2,000	XTTR300CP / 250	XTTR300FP / 450	XTTR300PP / 90
	 Type I7 point Draw-Tite™ shank Coating: NanoGard™	Superior Cor Protection Pressure treatments lumber approve	eated		-0	
	Bit: 25Q1 (No. 1 Square)	- M				



STAINLESS STEEL

Type ST 305 Stainless Steel Exterior Screw ◆



COARSE THREAD Wood to Wood



Type ST 305 stainless steel exterior fasteners are designed for all outdoor wood applications, eliminates staining or streaking around fastener head when used with cedar, redwood, mahoganies and wood composites. Flat Head star drive with countersinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates pre-drilling in most cases. Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star recess · Flat head with
- countersinking nibs • Type I7 cutter point
- Draw-Tite™ shank

Metal: 305 Stainless Steel

Bit: \$2T20 (Star 20) S2T25 (Star 25)

	SIZE	BULK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS	BLISTER PACK
	8 x I-I/4-in	GTST125 /5,000	VBGTSTI25 / 1,005	XGTST125 / 190	BPGTST125 / 25
3 20	8 X I-I/2-in	GTST150 / 4,000	VBGTSTI50 / 840	XGTSTI50 / 170	BPGTST150 / 25
STAR	8 x 2-in	GTST200/3,000	VBGTST200 / 625	XGTST200 / 125	BPGTST200 / 25
	8 x 2-1/2-in	GTST250 / 2,500	VBGTST250 / 390	XGTST250 / 115	BPGTST250 / 25
STAR 25	10 x 3-in	GTST300 / 2,000	VBGTST300 / 325	XGTST300 / 80	BPGTST300 / 25
	10 x 3-1/2-in	GTST350 / 1,500	VBGTST350 / 275	XGTST350 / 65	BPGTST350 / 25
ر ا	10 x 4-in	GTST400 / 1,000	VBGTST400 / 250	XGTST400 / 55	BPGTST400 / 25





WARNING: This product can expose you to chemicals including nickel (metalic), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

> A Grabber Construction Products item ★ GRABBER PRODUCT COLOR CODING



Stainless 305 Trim Head Deck and Fence Screw



COARSE THREAD Wood to Wood



Type ST 305 stainless steel exterior fasteners are designed for all outdoor wood applications, eliminates staining or streaking around fastener head when used with cedar, redwood, mahoganies and wood composties. Trim head star drive with counter-sinking nibs.Deep thread for greater holding power. Type 17 cutter point eliminates pre-drilling in most cases. Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star recess
- Trim head
- Type I7 point Draw-Tite™ shank

Stainless Steel Superior Corrosion

7 x 1-5/8-in

7 x 2-1/4-in

8 x 3-in



WARNING: This product can expose you to chemicals including nickel (metalic), which is

www.P65Warnings.ca.gov.

known to the State of California to cause cancer. For more information go to







Painted Trim Head Stainless 305 Screw



Type ST 305 stainless steel exterior fasteners are designed for all outdoor wood applications, eliminates staining or streaking around fastener head when used with cedar, redwood, mahoganies and wood composites. Trim Head with countersinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates pre-drilling in most cases. Draw-Tite shank pulls both wood members together for a secure fastening

- Star recess
- Painted trim head
- Type I7 cutter point
 Draw-Tite™ shank

Metal: 305 Stainless steel Bit: \$2T15 (Star 15)

COARSE THREAD Wood to Wood

SIZE	BULK ITEM NO/PCS	5-Ib ITEM NO/PCS	I-Ib ITEM NO/PCS
7 x I-5/8-in	GTPHTRI58W /5,000	VBGTPHTRI58W/935	XGTPHTRI58W /190
7 x 2-1/4-in	GTPHTR225W/3,000	VBGTPHTR225W /690	XGTPHTR225W / 135





WARNING: This product can expose you to chemicals including nickel (metalic), which is known to the State of California to cause cancer. For more information go to $% \left\{ 1,2,\ldots ,n\right\}$ www.P65Warnings.ca.gov.

> A Grabber Construction Products item ★ GRABBER PRODUCT COLOR CODING



DRIVER ACCESSORIES

For satisfactory performance, self drilling fasteners should be driven with a 4-6 amp screwgun at 2500 RPM or less and equipped with a depth location nosepiece.



DRIVE BITS			
PHILLIPS			
POINT	LENGTH		
P-2	1-in, 2-in, 3-1/2-in, 6-in		
P-2-R	1-in		
P-3	1-in, 2-in		
SQUARE			
SQ-1	1-in, 2-in		
SQ-2	1-in, 2-in		
STAR			
T-15	1-in, 2-in		
T-20	1-in, 2-in		
T-25	1-in, 2-in		



NAILS

Type CC Coated Smooth Shank



Drywall Nails are designed for attaching drywall to wood studs. Features include 13 ga head to create dimple in drywall and Type CC rosin coat to increase holding power in stud.

Smooth shank

Coating: Cement coated

DRYWALL NAIL Drywall to Wood

SIZE	BULK ITEM/WEIGHT	5-Ib ITEM
I-I/2-in	DWCCI50 / 50-lbs	NCCI12FP / 5-lbs
1-3/8-in	DWCCI38 / 50-lbs	NCCI38FP/5-lbs

A Grabber Construction Products item





ACOUSTICAL

Acoustical Drill Point Eye Lag Screw 🔷



Scorpion Self-Drilling eye lag fasteners are designed for attaching suspended ceilings hanger wire to steel (22 to 16 gauge) Features include Yellow zinc dicromate, cutting thread and ratchet collar. Installation tools see #ALD14 and #TOP123 lag pole.

EYE LAG SCREW For Metal

SIZE	BULK ITEM NO/PCS.	MINI BULK NO/PCS.	COUNT PK ITEM NO/PCS
I/4 x 2-in	ALDP200 / 1,000	ALDP2005C / 500	ALDP200CP / 100
I/4 x 3-I/4-in	ALDP314 / 1,000		ALDP314CP / 100



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Acoustical Eye Lag Screw



Scorpion Acoustical eye lags fasteners are designed for attaching suspended ceiling hanger wire to wood. Features include yellow zinc dicromate finish, type 17 point and deep thread for best performance. These sharp point screws go in with ease using the eye-lag installation tool #ALD14 or #ALD516

EYE LAG SCREW For Wood

SIZE	BULK ITEM NO/PCS.	COUNT PK ITEM NO/PCS	
I/4 x 3-in	AL300 / 1,000	AL300CP / 100	
I/4 x 4-in	AL400 / 1,000	AL400CP / 100	
1/4 x 5-in	AL500 /1,000	AL500CP / 100	
5/16 x 3-1/2-in	AL312 / 1,000	AL312CP / 100	* Large hole accepts 1/4-in pencil rod



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Acoustical Pierce Point Eye Lag Screw 🔷



Scorpion Pierce Point eye lag fasteners are designed for attaching suspended ceilings hanger wire to steel (22 to 20 gauge) Features include Yellow zinc dicromate and ratchet collar. Installation tools see #ALD14 and #TOP123 lag pole.

EYE LAG SCREW For Steel

SIZE	BULK ITEM NO/PCS.	COUNT PK ITEM NO/PCS
I/4 x 2-3/4-in	ALSP234 / 1,000	ALSP234CP / 100



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Acoustical Eye Lag Pole •



Lag pole tool provides an efficient method for attaching wire to a ceiling with an eye-lag screw. Power the pole with any 3/8" or 1/2" drill. Installs eye-lag screws from ground level without the need for ladders, scaffolding, or scissor lifts. Black anodized aircraft-quality aluminum.

LAG POLE INSTALATION TOOL

SIZE	ITEM NO.
4-ft, 8-ft, 12-ft 3 SECTION	TOPI23
6-ft, 12-ft, 18-ft 3 SECTION	TOP18

Tension Pins



Tension Pins are tempered steel designed for attaching clips, hangers, furring strips, etc. to concrete blocking.

MOLDING NAILS

SIZE	BULK ITEM NO/WT.	5-Ib ITEM NO/WT.
1-1/8-in	TPII8 / 50-lb	VBTPII8 / 5-lb

Wedge Anchor



Scorpion Tie-Wire Wedge Anchors are designed for attaching suspended ceiling wire to concrete ceilings. Features include 302 stainless steel expansion clip, carbon steel roll formed body, and 5/16 hole.

ACOUSTICAL TIE WIRE WEDGE ANCHOR

1/4 x 2-3/16-in	ATWM / 1,000	ATWCP / 100
SIZE	BULK ITEM NO/PCS.	COUNT PK ITEM NO/PCS





SpringShot 🔷



The patented SpringShot Acoustical Toggle is widely popular with the trades because of its ease of installation. Designers have recognized the SpringShot Acoustical toggle's features as a significant advancement to traditional overhead fastening toggle bolts rendering the old fashion toggles obsolete. The SpringShot's self-centering washer is a vast improvement over old style acoustical toggles, making correct installation effortless.

Self tightening & self-seating One size fits all applications Helps eliminate migrating sounds Will not loosen under vibration Project designer preferred

ACOUSTICAL TOGGLE BOLT

SIZE	BULK ITEM NO/PCS.
I/4 x 5-in	SFAST / 100

The patented spring action provides continuous pressure keeping the toggle fixed and secure, and won't loosen over time



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Scorpion 2 Hole Angle Brackets •



Scorpion 2 hole Angle Brackets are designed for attaching suspended ceiling wire or wire chain drops from wood, steel, or concrete.

ACOUSTICAL ANGLE BRACKETS

SIZE	BULK ITEM NO/PCS.	COUNT PK ITEM NO/PCS
3/16 x 5/16-in HOLES	A2H / 1,000	A2HCP / 100

Acoustical Pre-Tie Hanger Wire 🔸



Pre-tied 12ga. galvanized wire with 1" clip and pin assembly.

CLIP AND PIN

SIZE	ITEM NO./BUNDLE PCS.	DESCRIPTION
4-ft x 12 ga	DHW1204P100 / 100	RAMSET SDC100 1-in CLIP AND PIN
6-ft x 12 ga	DHW1206P100 / 100	RAMSET SDC100 I-in CLIP AND PIN
8-ft x 12 ga	DHW1208P100 / 100	RAMSET SDC100 1-in CLIP AND PIN
12-ft x 12 ga	DHW1212P100 / 100	RAMSET SDC100 1-in CLIP AND PIN

^{*} Other sizes available upon request

Acoustical Straight Wire 🔷



Straight end cut 12ga. galvanized wire

50-lb per bundle

STRAIGHT WIRE

SIZE	ITEM NO./WEIGHT	DESCRIPTION
12-ft x 12 ga	HW121250 / 50-lbs	HANGER WIRE, STRAIGHT END CUT
16-ft x 12 ga	HW121650 / 50-lbs	HANGER WIRE, STRAIGHT END CUT

Acoustical Fence Staples Galvanized ◆



Fence Staples are designed for attaching suspended ceiling wall angle to wood or gypsum.

FENCE STAPLES

SIZE	BULK ITEM NO/WT.	5-Ib ITEM NO/WT.
9 x I-I/2-in	GFS150 / 50-lb	AFSII2FP / 5-lb
9 x I-3/4-in	GFS175 / 50-lb	AFSI34FP / 5-lb

A Grabber Construction Products item



Scorpion acoustical products technical data and specifications can be found on the Scorpion web site: www.scorpionscrews.com/technicaldata.aspx



Acoustical Spool Wire •



Suspending main tees from eye lag screws in installation of drop ceiling.

CEILING TILE HANGER WIRE

SIZE	ITEM NO./BUNDLE PCS.	DESCRIPTION
18-ga. x 166-ft	TW18166S / Roll	HANGER WIRE, SPOOL

Acoustical U-Hank Wire 🔷



CEILING TILE HANK WIRE



Suspending acoustical tile, plaster or drywall channel, attache metal lath.

SIZE	ITEM NO./WEIGHT.	DESCRIPTION
18-ga. x 48-in	TW1848 / 25-lbs	PRECUT GALVANIZED WIRE

Rivet ◆



Scorpion grid match rivets are designed for suspended ceiling grid installations. #42 and #44 White or Black

- I/8-in Diameter
- I/8-in Grip Range
- White or Black

POP RIVETS For Assembling Ceiling Grid

	SIZE	BULK ITEM NO/APPROX PCS.	COUNT PK ITEM NO/PCS
IE	#42 1/8-in dia	ARW4210M / 10,000	ARW42CP / I,000
MHI	#44 I/8-in dia	ARW44IOM / 10,000	ARW44CP / 1,000
ACK	#42 1/8-in dia	ARB4210M / 10,000	ARB42CP / 1,000
BL)	#44 1/8-in dia	ARB44IOM / 10,000	ARB44CP / 1,000

FRAMING COLLARS

E-Z COLUMN Framing Collar

Framing support columns has never been easier

Quickly frame round support columns for finishing with drywall, paneling, etc.

E-Z Column Framing Collars are a hinged one piece construction for fast, easy framing around round columns. Collars fit both standard 3" and 3-1/2" steel columns. Use our blue collar for 4" supports.









Use yellow collar with 3" and 3-1/2" Columns

> Use blue collar with 4" Columns

> > A Grabber Construction Products item





COATINGS AND FINISHES

Black/Gray Phosphate Salt spray results ASTM BII7 24 hours, no red rust

Recommended for interior applications

Clear Zinc

Salt spray results ASTM BII7 24 hours, no red rust

Recommended for interior applications and exterior applications where the fastener will be encapsulated, I.e. the attachment of lathing prior to at the application of stucco.

Yellow Zinc

Salt spray results ASTM BII7 48 hours, no red rust

Recommended for interior applications and exterior applications where the fastener will be encapsulated, I.e. the attachment of lathing prior to at the application of stucco.



Salt spray results ASTM BII7 1000 hours, 15 cycles Kesternich per DIN 50018, no red rust

GrabberGard® metal finish is a high-grade proprietary metal surface processing technology that prevents corrosion. It is a duplex coating constituting a zinc substrate and organic polymer topcoat. The distinguishing feature of GrabberGard® is the joining and encapsulation the substrate with the fused organic surface coating. These layers are bonded together through thermal fusion, and this unique method of combining layers results in a combination of the coating films. GrabberGard® treatment does not attribute its anti-corrosion properties to any single material, but the synergy of these two layers, which when combined has superb corrosion resistant qualities. Suitable for use in non coastal areas with all pressure treated lumbers including ACQ.



305 Stainless Steel Non-Coastal Grade

305 stainless steel is a nickel chromium austenitic grade of stainless steel and is inherently non-magnetic. This material is not hardened by heat treatment and provides very good corrosion protection. Higher carbon content than the 304 series increases strength. Suitable for exterior grade that is not in coastal areas when used in conjunction with treated or untreated wood, including ACQ.



Mechanical Galvanized

Scorpion's Mechanical Galvanized screws are treated to meet or exceed the criterion outlined in ASTM B695 - 04(2009) standard specification coatings of zinc mechanically deposited on steel are Class 55, with a minimum thickness of 53 um, and are considered equivalent to ASTM A153 / A153M – 09 Hot Dipped Galvanized products. This cold-weld process is used to apply zinc coating without the introduction of hydrogen to the steel hardware for advanced corrosion protection, ductility and SST performance.



Salt spray results ASTM BII7 1000 hours, 15 cycles Kesternich per DIN 50018, no red rust

Grabber's NanoGard[™] product is an innovative nano scale surface treatment technology providing, high quality and extreme corrosion resistance properties. Suitable for use in non coastal areas with all pressure treated lumbers including ACQ.

ALSO AVAILABLE THROUGH SCORPION





Scorpion offers fasteners specifically designed for your applications:



www.scorpionscrews.com • 800-477-8876

