



06A Series

SCREW SPECIFICATIONS

Screw Gauge	#6
Length	1 1/4" - 1 5/8"
Recess	#2 Phillips
Head	Bugle
Point	Sharp
Thread Type	Coarse Thread
Finish	Gray Phosphate / Exterior



#2 Phillips



Bugle



Sharp

Sharp Point Drywall Screw

Drywall to wood fastener

APPLICATIONS

- Designed for attaching drywall to wood studs



FEATURES AND BENEFITS

- Phillips recess provides smooth engagement with moderate torque transmission
- Bugle head provides consistent penetration without damaging the paper
- Coarse threads are ideal for use in wood connections
- Ultra sharp point quickly penetrates wood reducing drive time
- Gray phosphate is an economical rust inhibitor meant for interior applications only.
- Exterior finish exceeds 1000 hours salt spray per ASTM B117

INSTALLATION GUIDELINES

- Use a screwdriver with a precise depth-sensitive clutch and speeds of up to 5000 RPM
- Overdriving may cause a weak connection
- The drive is finished when the screw is just below the work surface without tearing the paper
- 1" of penetration is suggested for drywall to wood applications

06A Series



Sharp Point Drywall Screw

Drywall to wood fastener

ORDERING INFORMATION

Item Code	Gauge	Length	Thread	Finish	Quantity	Drive Type	Point	Head
06A125P	#6	1 1/4"	Coarse	Gray Phosphate	1000 Tub	#2 Philips	Sharp	Bugle
06A125PB	#6	1 1/4"	Coarse	Gray Phosphate	4000 Box	#2 Philips	Sharp	Bugle
06A162P	#6	1 5/8"	Coarse	Gray Phosphate	1000 Tub	#2 Philips	Sharp	Bugle
06A162PB	#6	1 5/8"	Coarse	Gray Phosphate	4000 Box	#2 Philips	Sharp	Bugle
06A125WK	#6	1 1/4"	Coarse	Exterior	1000 Box	#2 Philips	Sharp	Bugle
06A162W	#6	1 5/8"	Coarse	Exterior	1000 Tub	#2 Philips	Sharp	Bugle

TECHNICAL INFORMATION


Ultimate Tensile (lbs)*	Torsional Strength (lbs-in)*
1120	30

*Figures represent ultimate average test results. An appropriate safety factor must be applied for design purposes

Finish	Testing Standard	Corrosion Resistance
Gray Phosphate	ASTM B117 Salt Spray Test	Over 24 Hours without red rust
Exterior	ASTM B117 Salt Spray Test	Over 1000 Hours without red rust

Reference Dimensions

Length (L):	1.25, 1.63 in
Head Diameter (A):	0.32 in
Head Height (H):	0.18 in
Major Diameter (D):	0.15 in
Minor Diameter (B):	0.10 in
Threads Per Inch (TPI):	8 threads/in

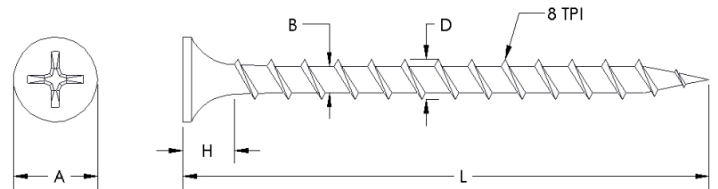

Fasteners comply with ASTM C1002 Type W