

UltimateOne™

ALL-FUEL CHIMNEY FOR HEARTH PROFESSIONALS

PRODUCT CATALOGUE



Listed per CAN/ULC-S629 and UL 103HT

FUEL




WOOD



GAS




OIL




COAL

PRODUCT FEATURES



SOLID PACK
INSULATED



STAINLESS STEEL
(SATIN FINISH)

A proud member and supporter of the following associations:



UltimateONE All-Fuel Chimney

THE "PEACE OF MIND" CHIMNEY

Selkirk has taken the next step in chimney evolution. Introducing the new UltimateONE (U1) chimney!

U1 is designed and manufactured with safety and performance as the Ultimate concern. Our unrivaled history and technical expertise in residential and commercial venting plus proven solid-pack insulation technology allow us to provide the safest insulated one inch wall chimney system available.

U1 inner liner and outer casing are of 304 stainless steel which provides superior resistance to corrosion at temperature ranges that exceed test standards. The brushed finish of the stainless steel provides a rich and distinguished look which compliments this superior product. U1 unique Thermal Reduction Spacer allows the insulation to form a continuous column of protection from one chimney length to the next minimizing hot spots at the joints. U1 special blend insulation made from environmentally friendly Alkaline-Earth Silicate (AES) wool provides a combined insulating value and high temperature capability unparalleled in the industry, maintaining the warm temperatures in the pipe while reducing outer surface temperatures for increased safety. The stainless steel inner liner and outer casing are welded along the seam for added strength and to resist moisture penetration. U1 chimney is secured at each joint by a new latch style locking band which is supplied with each insulated length, tee and elbow. Some other chimney systems may use screws to secure chimney lengths - this is often the point of rust, corrosion or moisture penetration.

GENERAL SPECIFICATIONS FOR MODEL UltimateONE CHIMNEY

UltimateONE factory-built chimney has been laboratory tested and listed by Intertek Testing Services at temperatures up to 2100°F (1150°C) with solid fuel, gas and oil-fired residential and building heating appliances in accordance with the following Safety Standards; CAN/ULC-S629 in Canada and UL 103 Type HT in the USA.

TESTED TEMPERATURES	CANADA	USA
Continuous flue gas temperature	650°C (1200°F)	1000°F
Over Firing (for a duration of 60 minutes)	925°C (1700°F)	1400°F
Creosote Burn Out Test		
(3 x 30 minutes - CANADA)	1150°C(2100°F)	2100°F
(3 x 10 minutes - USA)		

UltimateONE chimney (6", 7" and 8" inner diameter sizes) may be used for all solid wood, gas and oil-fired residential appliances including cooking ranges, heating stoves, fireplaces, central furnaces, floor furnaces, steam and hot water boilers, recessed heaters, unit heaters and water heaters. UltimateONE may also be used for masonry fireplaces and domestic type incinerators.

UltimateONE's supports are capable of supporting **four times** the combined weight of the chimney installation, at the maximum height given for the specific support.

Chimneys passing through occupied portions of the building must be enclosed with a 2" air space clearance maintained. Such enclosures must be firestopped at every floor penetration with UltimateONE parts designed for this purpose.

Framing and Support Table

UltimateONE Chimney	Dimensional Data (inches)		
Size, inches, inside	6	7	8
Outside diameter	8	9	10
Round Ceiling/Cathedral Support Framing*	10 3/8 x 10 3/8	11 3/8 x 11 3/8	12 3/8 x 12 3/8
Square Ceiling/Cathedral Support Framing**	10 3/8 x 10 3/8	11 3/8 x 11 3/8	12 3/8 x 12 3/8
All other framing	12 x 12	13 x 13	14 x 14
Approx. weight, lbs./ft.	4.5	5.5	6.2
Maximum Height For All Supporting Methods (Feet)			
Ceiling/Cathedral Support	54	48	42
Universal Wall/Resupport	28	25	20
Wall Support***	62	55	49
Universal Roof Support	30	26	23
Anchor Plate (AP)	60	60	60
Minimum Clearance To Combustibles		2 inches Minimum All Sizes	

* The clearance to combustibles obtained with a correctly installed Ceiling Support Assembly in the framed opening specified has been tested. The 2" clearance does not apply at this location.

**For Cathedral Ceiling application a rectangular opening must be prepared to suit the pitch of the roof.


***The Wall Support (WSP) is designed for 16 inch on center construction.

UltimateONE Chimney Features & Benefits

Thermal Reduction Spacer: Allows for expansion of the inner and outer pipes without fear of buckling in the event of a chimney fire. It also significantly reduces heat transfer at the joint.

Our continuous - welded seams give the UltimateONE Chimney exceptional strength while eliminating moisture penetration into the insulation.

Latch-type Locking Band: Included with each insulated length, tee and elbow, engages quickly, simply by latching to positively lock together each of the components. No tools required.

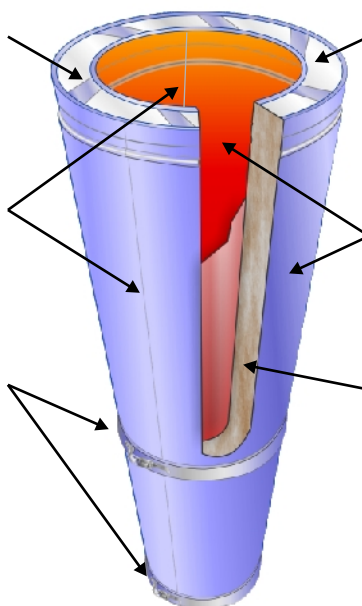

Insulation-to-Insulation Contact: Creates a continuous column of protection which eliminates cold air infiltration at every chimney joint. This feature significantly reduces the formation of creosote and therefore the potential for chimney fires.


304 Stainless Steel Construction: Used for both the inner liner and outer casing for superior resistance to corrosion. 316 inner material available in 6".

Solid-Pack Insulation: Provides maximum safety and performance. UltimateONE chimneys contain one full inch of insulation for superior insulating value and fire protection. UltimateONE's unique solid-pack design helps keep flue temperatures high (performance) and outer temperatures low (safety).

Stainless Steel Chimney Lengths

HEIGHT REQUIREMENTS


The chimney must extend at least three feet above the highest point where it passes through the roof surface and at least two feet higher than any part of the building within a horizontal distance of ten feet.

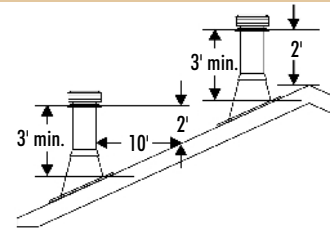

CHIMNEY SECTIONS




For 316 inner liner, add -316 behind the Prod.#
*6" diameter only.

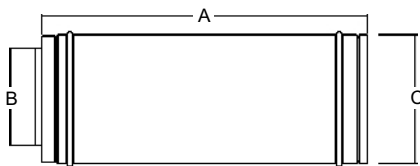

- Each length includes a Latch Locking Band
- Sectional overlap of 1"
- Chimneys are sized according to the inner diameter and are available in 6", 7" and 8".
- Chimney sections are available in 48" 36", 24", 18", 12", 9" & 6" lengths.

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0820406	6U1-48	6" x 48"	48"	6"	8"	1
0820306	6U1-36	6" x 36"	36"	6"	8"	1
0821006	6U1-24	6" x 24"	24"	6"	8"	1
0821106	6U1-18	6" x 18"	18"	6"	8"	1
0821206	6U1-12	6" x 12"	12"	6"	8"	1
0821406	6U1-9	6" x 9"	9"	6"	8"	1
0821606	6U1-6	6" x 6"	6"	6"	8"	1
0820407	7U1-48	7" x 48"	48"	7"	9"	1
0820307	7U1-36	7" x 36"	36"	7"	9"	1
0821007	7U1-24	7" x 24"	24"	7"	9"	1
0821107	7U1-18	7" x 18"	18"	7"	9"	1
0821207	7U1-12	7" x 12"	12"	7"	9"	1
0821407	7U1-9	7" x 9"	9"	7"	9"	1
0821607	7U1-6	7" x 6"	6"	7"	9"	1
0820408	8U1-48	8" x 48"	48"	8"	10"	1
0820308	8U1-36	8" x 36"	36"	8"	10"	1
0821008	8U1-24	8" x 24"	24"	8"	10"	1
0821108	8U1-18	8" x 18"	18"	8"	10"	1
0821208	8U1-12	8" x 12"	12"	8"	10"	1
0821408	8U1-9	8" x 9"	9"	8"	10"	1
0821608	8U1-6	8" x 6"	6"	8"	10"	1

ADJUSTABLE LENGTH

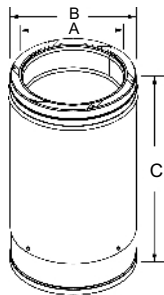


For 316 inner liner, add -316 behind the Prod.#
*6" diameter only.

- Used to adjust the system to an exact overall length
- Used also between elbows for a required offset distance
- All stainless steel construction with telescoping design
- Locking Band included

Prod. #	Part #	Size	Dimensions			Per Carton
			A	B	C	
0821506	6U1-AL18	6"	6.0"	8.0"	6.5" to 17"	1
0821507	7U1-AL18	7"	7.0"	9.0"	6.5" to 17"	1
0821508	8U1-AL18	8"	8.0"	10.0"	6.5" to 17"	1

LOCKING BANDS




- All Stainless Steel construction
- Latch-type locking mechanism.
- Only requires simple latching to positively lock into place - no tools required

Prod. #	Part #	Size	Dimensions	Per Carton
			A	
0829306	6U1-LB	6"	8.15"	10
0829307	7U1-LB	7"	9.15"	10
0829308	8U1-LB	8"	10.15"	10

Stainless Steel Elbows & Tees

CHIMNEY OFFSET CHARTS



Two pairs of elbows can be used to provide a sloped offset 15° or 30°. An offset data table is supplied to determine the offset desired and the offset height.

The vertical run of chimney above an offset must be supported using an Interior Resupport Assembly securely clamped to the pipe just above a Locking Band, with its straps nailed to a nearby structure.


INSULATED 15°, 30° & 45° (Canada only) ELBOWS

- The insulated elbow is used when an offset is required.
- A maximum of 8 feet is allowable between offsets.
- Two Latch Type Locking Bands are supplied with each Elbow Kit
- Elbow is fully insulated and can be used at the same 2" clearance as chimney lengths.
- All offset installations must be supported with an Interior Resupport Assembly.
- Elbows can be rotated to attain optimum positioning offset, and allow chimney to return to correct vertical alignment, prior to installing Locking Bands.
- Each Elbow Kit consists of two Elbows, two Locking Bands and one Interior Resupport Assembly.

Elbow	Length	6" Diameter		7" Diameter		8" Diameter	
		A	B	A	B	A	B
2 x 15°	NONE	1-1/2"	11-1/2"	1-1/2"	11-3/4"	1-5/8"	12"
2 x 15°	6"	3"	16-7/8"	3"	17-1/8"	3"	17-3/8"
2 x 15°	9"	3-3/4"	19-3/4"	3-3/4"	20"	3-3/4"	20-1/4"
2 x 15°	12"	4-1/2"	22-5/8"	4-1/2"	22-7/8"	4-5/8"	23-1/8"
2 x 15°	18"	6"	28-3/8"	6-1/8"	28-5/8"	6-1/8"	28-7/8"
2 x 15°	24"	7-5/8"	34-1/4"	7-5/8"	34-1/2"	7-5/8"	34-3/4"
2 x 15°	36"	10-3/4"	45-3/4"	10-3/4"	46-1/8"	10-3/4"	46-3/8"
2 x 15°	48"	13-7/8"	57-3/8"	13-7/8"	57-5/8"	13-7/8"	57-7/8"
2 x 30°	NONE	3-3/8"	12-1/2"	3-1/2"	13"	3-5/8"	13-1/2"
2 x 30°	6"	6-1/8"	17-1/4"	6-1/4"	17-1/8"	6-3/8"	18-1/4"
2 x 30°	9"	7-5/8"	19-7/8"	7-3/4"	20"	7-7/8"	20-7/8"
2 x 30°	12"	9-1/8"	22-3/8"	9-1/4"	22-7/8"	9-3/8"	22-3/8"
2 x 30°	18"	12-1/8"	27-5/8"	12-1/4"	28-5/8"	12-3/8"	28-5/8"
2 x 30°	24"	15-1/8"	32-7/8"	15-1/4"	34-1/2"	15-3/8"	33-7/8"
2 x 30°	36"	21-1/8"	46-1/4"	21-1/4"	46-1/8"	21-3/8"	44-1/4"
2 x 30°	48"	27-1/8"	53-5/8"	27-1/4"	57-5/8"	27-3/8"	54-5/8"
2 x 45°	NONE	6"	14-5/8"	6-1/8"	14-7/8"	6-2/8"	15-2/8"
2 x 45°	6"	9-7/8"	18-1/2"	10"	18-7/8"	10-1/4"	19-1/8"
2 x 45°	9"	12"	20-5/8"	12-1/8"	21"	12-3/8"	21-1/4"
2 x 45°	12"	14-1/8"	22-3/4"	14-1/4"	23-1/8"	14-4/8"	23-3/8"
2 x 45°	18"	18-3/8"	27"	18-1/2"	27-3/8"	18-5/8"	27-5/8"
2 x 45°	24"	22-5/8"	31-1/4"	22-3/4"	31-5/8"	22-7/8"	31-7/8"
2 x 45°	36"	31-1/8"	39-3/4"	31-1/4"	40-1/8"	31-3/8"	40-3/8"
2 x 45°	48"	39-5/8"	48-1/4"	39-3/4"	48-1/2"	39-7/8"	48-7/8"

All measurements in chart are in inches. Construction tolerances are ± one inch.


15° ELBOW KIT

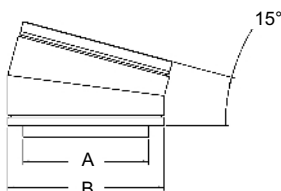

For 316 inner liner, add -316 behind the Prod.# *6" diameter only.

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0822406	6U1-EL15K	15° - 6"	6"	8"	1
0822407	7U1-EL17K	15° - 7"	7"	9"	1
0822408	8U1-EL15K	15° - 8"	8"	10"	1


30° ELBOW KIT



For 316 inner liner, add -316 behind the Prod.# *6" diameter only.

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0822306	6U1-EL30K	30° - 6"	6"	8"	1
0822307	7U1-EL30K	30° - 7"	7"	9"	1
0822308	8U1-EL30K	30° - 8"	8"	10"	1


45° ELBOW KIT (CANADA ONLY)



Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0822506	6U1-EL45K	45° - 6"	6"	8"	1
0822507	7U1-EL45K	45° - 7"	7"	9"	1
0822508	8U1-EL45K	45° - 8"	8"	10"	1

NOTE: 45° Elbow Kit is Listed to ULC-S610 Standard for factory-built fireplaces

INSULATED TEE




For 316 inner liner, add -316 behind the Prod.# *6" diameter only.

- The Insulated Tee is used for a through-the-wall installation using a Wall Support.
- A chimney length is attached to the tee branch using a Locking Band to pass safely through a wall.
- Maximum height of chimney supported by the Insulated Tee fixed to a Wall Support is variable depending on the Wall Support type selected.
- Each Tee includes an Insulated Tee Cap and Locking Band

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0824306	6U1-IT	6"	16"	8.8"	6.5"	1
0824307	7U1-IT	7"	14.7"	8.3"	6"	1
0824308	8U1-IT	8"	13.5"	7.6"	5.5"	1

Stainless Steel Elbows & Tees

INSULATED TEE CAP




For 316 inner liner, add
-316 behind the Prod.#
*6" diameter only.

- The Insulated Tee Cap is used to seal the base of an Insulated Tee
- The Tee Cap is easily removed for chimney maintenance or inspection
- Insulated to maintain flue gas temperatures

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0814506-316	6U1-ITC	6"	8"	6"	10
0814507	7U1-ITC	7"	9"	7"	10
0814508	8U1-ITC	8"	10"	8"	10

Supports

CEILING / CATHEDRAL SUPPORT (SQUARE)

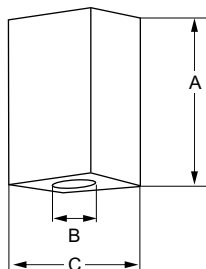


- Used to support the chimney from a flat or cathedral ceiling
- Will support up to 54 feet of chimney
- Decorative matte black finish
- Includes Ceiling Support, Trim Plate, Smoke Pipe Adapter and 4 securing tabs

Prod.#	Part #	Size	Dimensions			Support Weight	Per Carton
			A	B	C		
0842806	6U1-SBCS	6"	24"	6"	10.25"	54'	1
0842807	7U1-SBCS	7"	24"	7"	11.25"	48'	1
0842808	8U1-SBCS	8"	24"	8"	12.25"	42'	1

CEILING / CATHEDRAL SUPPORT - ROUND




TABS MUST
BE ON TOP

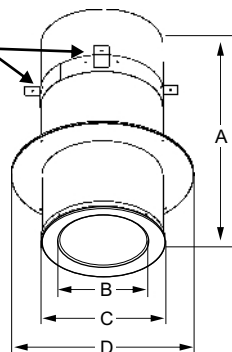

- Used to support the chimney from a flat or cathedral/sloped ceiling
- Will support up to 54 feet of chimney
- Decorative matte black finish
- Includes Ceiling Support, Support Collar, Smoke Pipe Adapter, Cutting Template and Trim Plate
- The round Trim Plate OD is: 19" for 6"; 21" for 7"; and 22" for 8"

Prod.#	Part #	Size	Dimensions				Support Weight	Per Carton
			A	B	C	D		
0844606	6U1-RBCS	6"	24"	6"	10"	19"	54'	1
0844607	7U1-RBCS	7"	24"	7"	11"	19"	48'	1
0844608	8U1-RBCS	8"	24"	8"	12"	19"	42'	1

CEILING / CATHEDRAL SUPPORT EXTENSION - ROUND




- Used to extend Round Ceiling / Cathedral Support for steeper pitch application
- Attaches easily to Round Ceiling / Cathedral Support
- Decorative matte black finish

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0844806	6U1-RBCSE	6"	10"	24"	1
0844807	7U1-RBCSE	7"	11"	24"	1
0844808	8U1-RBCSE	8"	12"	24"	1

Supports continued


CEILING / CATHEDRAL SUPPORT EXTENSION (SQUARE)



- Used to extend Square Ceiling / Cathedral Support for steeper pitch application
- Attaches easily to Square Ceiling / Cathedral Support
- Decorative matte black finish

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0842906	6U1-CSES	6"	10-1/4"	24"	1
0842907	7U1-CSES	7"	11-1/4"	24"	1
0842908	8U1-CSES	8"	12-1/4"	24"	1


WALL SUPPORT



- Used to support the chimney system at the base of the installation when using an insulated tee where the chimney has a lateral connection
- Will support up to 62 feet of chimney
- Allows for an adjustment of 2 inches to 6 inches from a vertical wall
- Includes Base Plate, Wall Brackets and hardware

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0812806	6U1-WSP	6"	17.1"	10.5"	14.7"	1
0812807	7U1-WSP	7"	17.1"	11.5"	14.7"	1
0812808	8U1-WSP	8"	17.1"	12.5"	14.7"	1

UNIVERSAL EXTENDED WALL SUPPORT





- Designed to support a vertical wall installation above the insulated tee
- Will support up to 28 feet of chimney
- Adjusts up to 12" from a vertical wall & will allow to pass by a 12" overhang

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0800900	EWS	5" - 8"	22"	5"	8" - 10"	1
*0800900S	EWS-SS	5" - 8"	22"	5"	8" - 10"	1

*Stainless steel construction

UNIVERSAL WALL SUPPORT / RESUPPORT ASSEMBLY




- Designed to support a vertical wall installation above the tee or above an offset
- Also serve as an intermediate support
- Will support up to 28 feet of chimney (on 6" diameter pipe)
- Pre-assembled to 6" diameter

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0800200	U1-UWRSA	5" - 8"	14"	12-3/8"	10

A is the height of the leg support

UNIVERSAL INTERIOR RESUPPORT

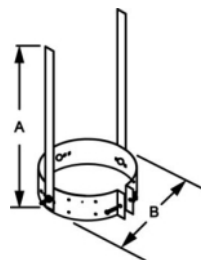


- Incorporates the flexibility to work on 6", 7" and 8" diameters and is an excellent method for re-supporting chimney systems that have offsets or vertical runs that require additional support (up to 26 feet)
- Straps are 18 inches in length
- Will support up to 26 feet of chimney

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0800300	U1-UIRA	5" - 8"	18"	8", 9" & 10"	10

Supports continued


UNIVERSAL ROOF SUPPORT ASSEMBLY

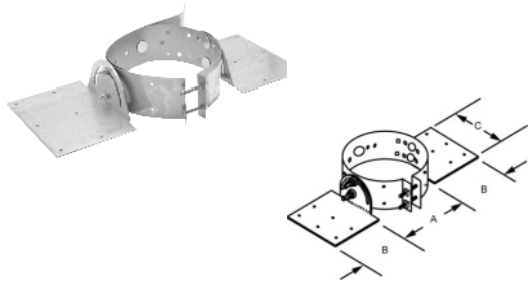

- The Universal Roof Support Assembly is designed to provide support above the roof and adjusts to any roof pitch
- The Universal Band is pre-assembled for 6" diameter chimney but will also fit 7" and 8" chimneys
- The Universal Roof Support Assembly will support a total height of 30 feet of chimney, 20 feet of which can be suspended beneath it.

Prod.#	Part Number	Dimensions			Per Carton
0800500	U1-URSA	A	B	C	1
		8", 9" & 10"	5"	8"	

ANCHOR PLATE

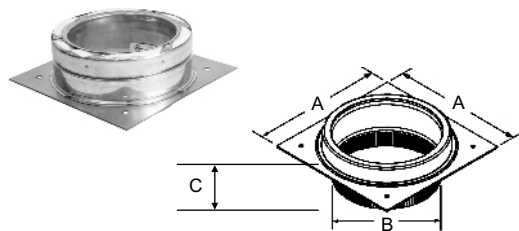


- Provides a secure attachment for the UltimateONE Chimney to a "Listed" factory-built appliance certified for use with UltimateONE, or masonry fireplace
- Includes Base Plate and Flue Extension
- Supports up to 60' of chimney
- Stainless steel construction

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0819906	6U1-AP	6"	9.4"	5.9"	3.9"	1
0819907	7U1-AP	7"	10.4"	6.9"	3.9"	1
0819908	8U1-AP	8"	11.4"	7.9"	3.9"	1

Shields


JOIST SHIELD (FIRESTOP RADIATION / JOIST SHIELD)

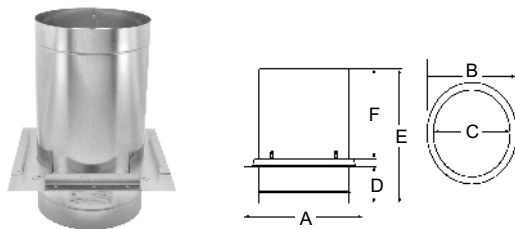

- Required where the chimney passes from a lower living space into an upper living space and into an attic space
- Maintains the mandatory 2" clearance to combustibles provided by proper framing

Prod.#	Part #	Size	Dimensions						Per Carton
			A	B	C	D	E	F	
0819006	6U1-JS	6"	14"	10.03"	8.50"	5.0"	18.0"	13.0"	1
0819007	7U1-JS	7"	15"	11.03"	9.50"	5.0"	18.0"	13.0"	1
0819008	8U1-JS	8"	16"	12.03"	10.50"	5.0"	18.0"	13.0"	1

ATTIC INSULATION SHIELD

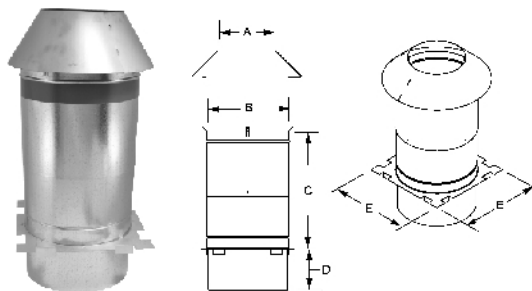


- The AIS must be installed where the chimney enters the attic space in a ceiling supported (interior) installation
- Designed to keep insulation away from the chimney, and to maintain the mandatory 2" clearance to combustibles provided by proper framing
- Includes an AIS Collar

Prod.#	Part #	Size	Dimensions					Per Carton
			A	B	C	D	E	
0843406	6U1-AIS	6"	8"	12.2"	11" to 20"	7"	14"	1
0843407	7U1-AIS	7"	9"	13.2"	11" to 20"	7"	15"	1
0843408	8U1-AIS	8"	10"	14.2"	11" to 20"	7"	16"	1

The AIS will adjust to allow for a depth of insulation up to 18-1/2".

Shields continued

ALTERNATE ATTIC INSULATION SHIELD

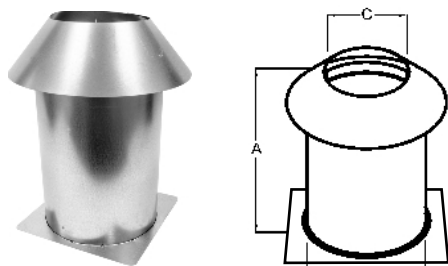


- The AAIS can be used as a substitute instead of the regular AIS when a fully open attic is immediately above a Round Ceiling Support
- Fits perfectly over the Round Ceiling Support to allow the Supplemental Insulation Shielding to be installed

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0843506	6U1-AAIS	6"	18"	12"	8"	1
0843507	7U1-AAIS	7"	18"	13"	9"	1
0843508	8U1-AAIS	8"	18"	14"	10"	1

The AAIS will adjust to allow for a depth of insulation up to 16-1/2".


INSULATED WALL THIMBLE

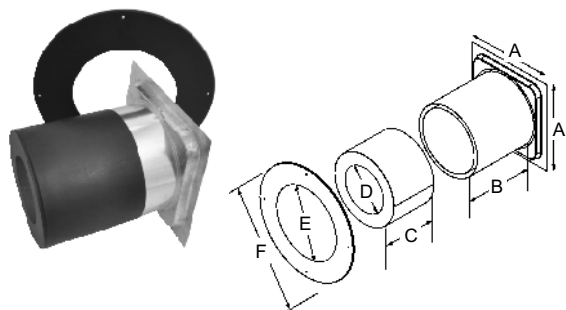

- Required where the chimney passes horizontally through a combustible wall
- Will accommodate a wall thickness of 12"
- Adjustable Trim Cap in a decorative matte black finish
- Matte black finish Trim Collar
- Factory installed insulation between shields

Prod.#	Part #	Size	Dimensions						Per Carton
			A	B	C	D	E	F	
0828706	6U1-IWT	6"	14"	12.0"	9.0"	6.2"	10.8"	19"	1
0828707	7U1-IWT	7"	15"	12.0"	9.0"	7.2"	11.8"	22"	1
0828708	8U1-IWT	8"	16"	12.0"	9.0"	8.2"	12.8"	22"	1

DECORATOR SLEEVE

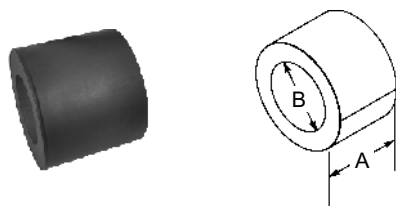


- Used to provide a decorative finish to the horizontal length within the room when passing through a non-combustible wall
- Adjustable Trim Cap in a decorative matte black finish
- Built-in spacers

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B		
0817806	6U1-DS9	6"	8"	6.2"		1
0817807	7U1-DS9	7"	8"	7.2"		1
0817808	8U1-DS9	8"	8"	8.2"		1

Flashings and Storm Collars


ROOF FLASHING SELECTION CHART



In this example, the pitch is 3/12

To determine what roof flashing you'll require, you must work out the pitch of your roof. To determine the pitch, you'll need two rulers and a level. Measure the number of inches from the end of the level down to the roof.

VENTED FLASHING ASSEMBLY 0/12 to 6/12


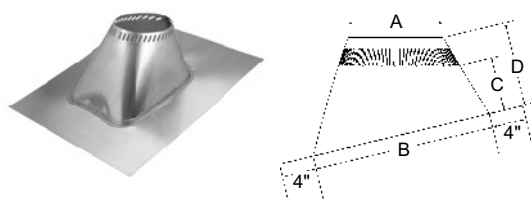


- Special Vented Flashing
- Required for use in fully enclosed attic or exterior chase
- Used where the chimney passes through a roof with a pitch of 0/12 to 6/12
- Storm Collar included
- Listed to CAN/ULC-S629
- Includes Roof Shield

Prod.#	Part #	Size	Dimensions				Per Carton
			A	B	C	D	
0843306	6U1-AF6-C	6"	9.0"	21.0"	6.0"	9.3"	1
0843307	7U1-AF6-C	7"	10.0"	21.0"	6.0"	9.3"	1
0843308	8U1-AF6-C	8"	11.0"	21.0"	6.0"	9.3"	1

Flashings and Storm Collars continued



VENTED FLASHING ASSEMBLY 7/12 to 12/12

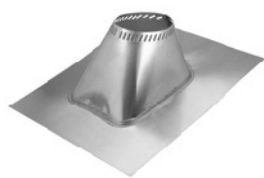

- Special Vented Flashing
- Required for use in fully enclosed attic or exterior chase
- Used where the chimney passes through a roof with a pitch of 7/12 to 12/12
- Storm Collar included
- Listed to CAN/ULC-S629

Prod.#	Part #	Size	Dimensions				Per Carton
			A	B	C	D	
0843706	6U1-AF12-C	6"	9.3"	20.5"	6.0"	10.0"	1
0843707	7U1-AF12-C	7"	10.3"	22.3"	6.0"	10.0"	1
0843708	8U1-AF12-C	8"	11.3"	24.0"	6.0"	10.0"	1



NON-VENTED FLASHING ASSEMBLY 0/12 to 2/12



- Used where the chimney passes through a roof with a pitch of 0/12 to 2/12
- Storm Collar included
- Includes Roof Shield

Prod.#	Part #	Size	Dimensions					Per Carton
			A	B	C	D	E	
0843106	6U1-UVTF	6"	8.5"	12.25"	24"	21.25"	10.2"	1
0843107	7U1-UVTF	7"	9.5"	15.75"	24.75"	24"	11"	1
0843108	8U1-UVTF	8"	10.5"	15.75"	27.75"	24"	10.7"	1



NON-VENTED FLASHING ASSEMBLY 2/12 to 6/12



- Used where the chimney passes through a roof with a pitch of 2/12 to 6/12
- Storm Collar included

Prod.#	Part #	Size	Dimensions					Per Carton
			A	B	C	D	E	
0843206	6U1-UVAF6	6"	8.5"	16.5"	28.5"	24"	7.2"	1
0843207	7U1-UVAF6	7"	9.5"	16.5"	28.5"	24"	6.9"	1
0843208	8U1-UVAF6	8"	10.5"	20"	32"	27"	8.4"	1


NON-VENTED FLASHING ASSEMBLY 6/12 to 12/12



- Used where the chimney passes through a roof with a pitch of 6/12 to 12/12
- Storm Collar included

Prod.#	Part #	Size	Dimensions					Per Carton
			A	B	C	D	E	
0843606	6U1-UVAF12	6"	8.5"	20"	32"	27"	6.5"	1
0843607	7U1-UVAF12	7"	9.5"	20"	32"	27"	7.4"	1
0843608	8U1-UVAF12	8"	10.5"	20"	32"	27"	5.6"	1

FLASHING ASSEMBLY 12/12 to 24/12




- Used where the chimney passes through a roof with a pitch of 12/12 to 24/12
- Safety Vents on flashing
- Storm Collar sold separately

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
206835	6TAF-24	6"	8-1/8"	28.9"	40.9"	1
207835	7TAF-24	7"	9-1/8"	31.3"	43.3"	1
208835	8TAF-24	8"	10-1/8"	33.4"	45.4"	1

Flashings and Storm Collars continued


FLASHING ASSEMBLY 24/12 to 36/12

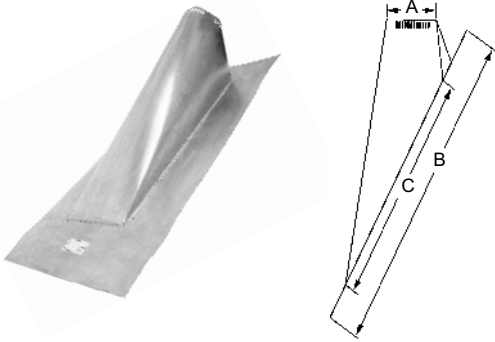

- Used where the chimney passes through a roof with a pitch of 24/12 to 36/12
- Safety Vents on flashing
- Storm Collar sold separately

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
206840	6TAF-36	6"	8-1/8"	41.3"	53.3"	1
207840	7TAF-36	7"	9-1/8"	44.2"	56.3"	1
208840	8TAF-36	8"	10-1/8"	47.9"	59.9"	1

DEAD SOFT FLASHING - 2/12 to 6/12



- Used on corrugated roofs 2/12 to 6/12
- Safety Vents on flashing
- Storm Collar sold separately

Prod.#	Part #	Size	Dimensions				Per Carton
			A	B	C	D	
206845	6T-AF6D	6"	8-1/8"	16.5"	30.0"	33.0"	1
207845	7T-AF6D	7"	9-1/8"	16.5"	30.0"	33.0"	1
208845	8T-AF6D	8"	10-1/8"	19.9"	30.0"	33.0"	1


RUBBER BOOT FLASHING KIT - (UNIVERSAL)



- Used for installations on corrugated roofs with pitches flat to 12/12 except for 8" Chimney where 10/12 is max. pitch
- Kits include rubber boot, spacer kit, special storm collar and mounting hardware

Prod.#	Part #	Size	Dimensions	Per Carton
200275	URBAK1	6" to 8"	26-3/4" x 26-3/4"	1


UNIVERSAL METAL ROOF FLASHING KIT



- Used in conjunction with the above metal flashings to seal the opening when penetrating a corrugated metal roof
- Flashing sold separately

Prod.#	Part #	Size	Per Carton
200280	URFK	6" to 8"	1

STORM COLLAR - CANADA ONLY

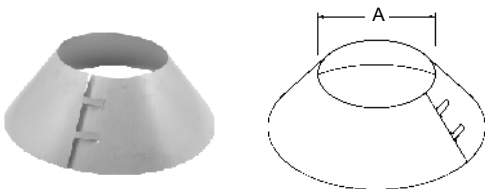


- Used in conjunction with roof flashing to weather proof the system
- Use with ULC-S629 Flashings (Models *U1-AF6-C and *U1-AF12-C)
- Asterisk denotes diameter: 6", 7" or 8"
- Storm Collar is tightened by adjusting tabs after proper positioning

Prod.#	Part #	Size	Dimensions	Per Carton
0814206	6U1-SC-C	6"	A	10
0814207	7U1-SC-C	7"	9.0"	10
0814208	8U1-SC-C	8"	10.0"	10

Flashings and Storm Collars continued

STORM COLLAR - (FOR REGULAR FLASHINGS)



- Used in conjunction with *T-TF / *T-AF6 / *T-AF12 roof flashings listed on pages 9 and 10 to weather proof the system
- Asterisk denotes diameter: 6", 7" or 8"
- Storm Collar is tightened by adjusting tabs after proper positioning


Prod.#	Part #	Size	Dimensions	Per Carton
			A	
206810	5/6T-SC	6"	8.0"	10
208810	7/8T-SC	7"/8"	10.0"	10

FLASHING - STORM COLLAR COMBO PACKS

Prod.#	Part #	Size	Dimensions	Per Carton
0843336	6U1 AF6SC-C	6"	Vented Flashing 0/12 - 6/12 w/SC ULC S629	3
0843337	7U1 AF6SC-C	7"	Vented Flashing 0/12 - 6/12 w/SC ULC S629	3
0843338	8U1 AF6SC-C	8"	Vented Flashing 0/12 - 6/12 w/SC ULC S629	3
0843736	6U1 AF12SC-C	6"	Vented Flashing 7/12 - 12/12 w/SC ULC S629	3
0843737	7U1 AF12SC-C	7"	Vented Flashing 7/12 - 12/12 w/SC ULC S629	3
0843738	8U1 AF12SC-C	8"	Vented Flashing 7/12 - 12/12 w/SC ULC S629	3
0843136	6U1 UVTFSC	6"	Unvented Flashing Assy 0/12 - 2/12 pitch w/SC	4
0843137	7U1 UVTFSC	7"	Unvented Flashing Assy 0/12 - 2/12 pitch w/SC	4
0843138	8U1 UVTFSC	8"	Unvented Flashing Assy 0/12 - 2/12 pitch w/SC	4
0843236	6U1 UVAF6SC	6"	Unvented Flashing Assy 2/12 - 6/12 pitch w/SC	4
0843237	7U1 UVAF6SC	7"	Unvented Flashing Assy 2/12 - 6/12 pitch w/SC	4
0843238	8U1 UVAF6SC	8"	Unvented Flashing Assy 2/12 - 6/12 pitch w/SC	4
0843636	6U1 UVAF12SC	6"	Unvented Flashing Assy 6/12 - 12/12 pitch w/SC	4
0843637	7U1 UVAF12SC	7"	Unvented Flashing Assy 6/12 - 12/12 pitch w/SC	4
0843638	8U1 UVAF12SC	8"	Unvented Flashing Assy 6/12 - 12/12 pitch w/SC	4

Rain Cap

ROUND TOP TERMINATION CAP - STAINLESS STEEL




For 316 inner liner, add
-316 behind the Prod.#
*6" diameter only.

- Part of the chimney system roof assembly, the Round Top is designed with a dome to exclude rain and leaves and a lower skirt to deflect wind for proper chimney draft
- The Round Top is designed with three legs that slide down over the outside of the chimney. A cinch band is then positioned over the legs and tightened to hold the top firmly in place. This design makes cap removal for cleaning a breeze.
- Made of stainless steel

Prod.#	Part #	Size	Dimensions	Per Carton
			A B C	
0827606	6U1-CT	6"	8.0" 12.0" 5.5"	1
0827607	7U1-CT	7"	9.0" 14.0" 6.3"	1
0827608	8U1-CT	8"	10.0" 16.0" 7.0"	1

Parts and Accessories

SPARK ARRESTER




- Corrosion resistance diamond mesh Stainless Steel
- Preformed
- Slip over the dome of the Round Top

Prod.#	Part #	Size	Per Carton
206791	6T-USA	6"	1
207791	7T-USA	7"	1
208791	8T-USA	8"	1

Parts and Accessories continued


FINISHING COLLAR



- Used to fit over lower end of suspended insulated chimney pipe to provide finished appearance
- Matte black finish

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
206480	6T-FC	6"	6.3"	8.0"	4
207480	7T-FC	7"	7.3"	9.0"	4
208480	8T-FC	8"	8.3"	10.0"	4

SMOKE PIPE ADAPTOR





For 316 inner liner, add
-316 behind the Prod.#
*6" diameter only.

- For transition from black stove pipe to UltimateONE chimney
- Includes pipe stub and retainer ring

Prod.#	Part #	Size	Dimensions		Per carton
			A	B	
0819806	6U1-SPA	6"	3.7"	6"	1
0819807	7U1-SPA	7"	3.7"	7"	1
0819808	8U1-SPA	8"	3.7"	8"	1


TRIM PLATE CEILING SPACER - USA ONLY



- Used to trim ceiling, closing off the airspace around the pipe when the chimney is supported from above and extended down into the room.
- Used in conjunction with an Attic Insulation Shield
- Black matte finish

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
206488	6UT-TPS	6"	19.0"	12.0"	8.1"	1
207488	7UT-TPS	7"	21.0"	13.0"	9.1"	1
208488	8UT-TPS	8"	22.0"	14.0"	10.1"	1

ADJUSTABLE PITCHED CEILING PLATE - 0/12 TO 6/12 PITCH - USA ONLY




- Pitched Ceiling Plate provides a finished appearance where the chimney passes through a sloped ceiling
- Only two parts required to fit the full range of pitches
- Black matte finish

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
206512	6UT-PCPAJ	6"	16.5"	19" - 30"	1
207512	7UT-PCPAJ	7"	17.5"	20" - 31"	1
208512	8UT-PCPAJ	8"	18.5"	21" - 33"	1

Prod.#	Part #	Size	Dimensions		Per carton
			A	B	
206514	6UT-PCPAJ2	6"	16.5"	19" - 30"	1
207514	7UT-PCPAJ2	7"	17.5"	20" - 31"	1
208514	8UT-PCPAJ2	8"	18.5"	21" - 33"	1

ROUND TRIM COLLAR




- Used to close off space around pipe in a wall installation
- Matte black finish

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
3700276	6U1-TC	6"	19.0"	10.9"	1
3700277	7U1-TC	7"	22.0"	11.9"	1
3700278	8U1-TC	8"	22.0"	12.9"	1

Parts and Accessories continued

CLEANOUT TEE



- Always situated in a room with heating appliance
- Cap on bottom can be removed for easy cleaning
- Stainless steel construction


Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0514706	6CF-CA	6"	6.0"	13.5"	24.0"	4
0514707	7CF-CA	7"	7.0"	13.5"	25.0"	4
0514708	8CF-CA	8"	8.0"	13.5"	26.0"	4

REPLACEMENT TEE CAP FOR CLEANOUT TEE



Prod.#	Part #	Size	Per Carton
0850606	6UI-STC	6"	10
0850607	7UI-STC	7"	10
0850608	8UI-STC	8"	10

UNIVERSAL WALL BAND




- Provides lateral support for the chimney when installed adjacent to a wall
- Provides more than 4" of horizontal adjustability to clear some overhangs and obstructions
- Required at 8 foot or closer intervals to stabilize the chimney, whenever it is supported along a vertical wall

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0800700	U1-UWB	Universal	8", 9" & 10"	17"	4"	10
*0800700S	U1-UWBSS	Universal	8", 9" & 10"	17"	4"	10

*Stainless steel construction

WALL BAND



- Provides lateral support for the chimney when installed adjacent to a wall.
- Maintains the mandatory 2" clearance to combustibles
- Required at 8 foot or closer intervals to stabilize the chimney, whenever it is supported along a vertical wall

Prod.#	Part #	Size	Dimensions		Per Carton
			A	B	
0818806	6U1-WB	6"	8.1"	17"	10
0818807	7U1-WB	7"	9.1"	17"	10
0818808	8U1-WB	8"	10.1"	17"	10

UNIVERSAL TEE CAP RETAINER



- Used to secure tee cap on the bottom side of Insulated Tee
- Adjusts to fit all chimney diameters

Prod.#	Part #	Size	Per Carton
2002530	UTCR	6" to 8"	4

HD UNIVERSAL ROOF BRACE KIT




- Designed to provide extra stability for chimney system above roof line
- Required when the chimney extends 5 feet or more above the roof. Use one kit every 5 feet.
- Telescoping legs can adjust from 5' to 9'
- Support band adjusts to fit 6", 7", and 8" chimney

Prod.#	Part #	Size	Per Carton
0843900	HDRBK	6" to 8"	1

Parts and Accessories continued

SNOW SPLITTER ASSEMBLY



- Designed to deflect snow and ice while preventing unnecessary strain or damage to chimney
- Mounts directly above chimney pipe with easy panel assembly
- Made from heavy gauge galvanized steel

Prod.#	Part #	Size	Per Carton
2001922	USSA	6" to 8"	1


UNIVERSAL SHIELDING INSULATION



- The SUSI protects building materials against radiant heat from the chimney and helps maintain temperatures within the chimney system. The SUSI also reduces air infiltration into the house.

Prod.#	Part #	Size	Per Carton
0522908	SUSI	Universal	1

UNIVERSAL WALL CHANNEL

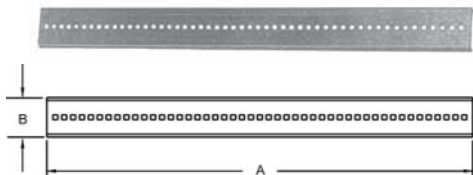


- The Universal Wall Channel provides a securing surface for a Wall Support or Wall Band to mounted when the framing is not within range

Prod.#	Part #	Size		Per Carton
0800800	WC	A 24"	B 2-1/4"	10

Components Specific to Canada Only


RIGID SUPPLEMENTAL RADIATION SHIELD - ENCLOSED CHIMNEY SYSTEM - CANADA ONLY

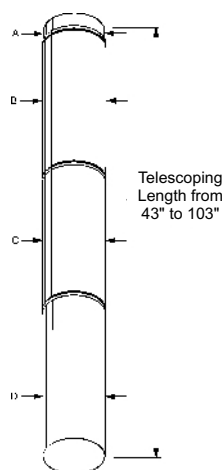

- Used only when the chimney is enclosed within living spaces and when the chimney is enclosed in an attic space
NOTE: Not required in an enclosed exterior chase
- Ideal for straight up installation
- Telescoping Length from 43" to 103"
- NOTE: Not required when UltimateONE is used to vent an oil or a gas burning appliance even when the chimney is enclosed.

Prod.#	Part #	Size	Dimensions				Per Carton
			A	B	C	D	
0850106	6U1-RSRS	6"	9.9"	10.5"	10.3"	10.1"	1
0850107	7U1-RSRS	7"	10.9"	11.5"	11.3"	11.1"	1
0850108	8U1-RSRS	8"	11.9"	12.5"	12.3"	12.1"	1


SUPPLEMENTAL RADIATION SHIELD - RIGID TEE - CANADA ONLY

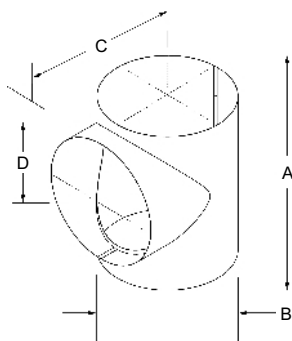

- Used only when the chimney is enclosed within a living space
NOTE: Not required in an enclosed exterior chase
- Shield held together using supplied screws and comes in two separate pieces
- NOTE: Not required when UltimateONE is used to vent an oil or a gas burning appliance even when the chimney is enclosed.

Prod.#	Part #	Size	Dimensions				Per Carton
			A	B	C	D	
0850206	6U1-RSRST	6"	13.5"	10.0"	7.0"	5.8"	1
0850207	7U1-RSRST	7"	14.7"	11.0"	7.5"	6.4"	1
0850208	8U1-RSRST	8"	16.0"	12.0"	8.0"	7.0"	1

FLEXIBLE SUPPLEMENTAL RADIATION SHIELD - CANADA ONLY

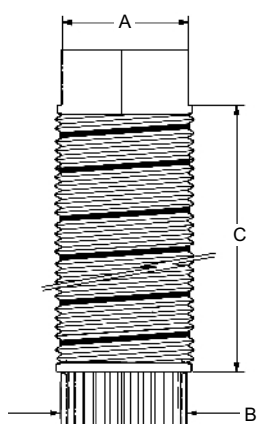

- Used only when the chimney is enclosed within living spaces and when the chimney is enclosed in an attic space
NOTE: Not required in an enclosed exterior chase
- Ideal for offset installation but can also be used in lieu of the Rigid Supplemental radiation Shield
- Flexible Length from 26" to 78" (packed 2 per carton)
- NOTE: Not required when UltimateONE is used to vent an oil or a gas burning appliance even when the chimney is enclosed.

Prod.#	Part #	Size	Dimensions			Per Carton
			A	B	C	
0850006	6U1-FSRS	6"	10.0"	9.9"	26" to 78"	2
0850007	7U1-FSRS	7"	11.0"	10.9"	26" to 78"	2
0850008	8U1-FSRS	8"	12.0"	11.9"	26" to 78"	2

SHIELD TRANSITION PIECE (4)



- Shield Transition Pieces provide a smooth connection from a square support to a round supplemental shield.

Prod.#	Part #	Size	Per Carton
0850300	U1-STP		1


Support Kits

The following are three basic Chimney Kits designed around one of the standard support systems. Select the kit that is best suited for your installation along with the required Chimney Lengths to reach your desired height and a suitable Adjustable Flashing from our vast selection. Other components may be required such as Elbows, Firestop Radiation/Joist shields, Universal Roof Brace Kit, etc.

CEILING/CATHEDRAL SUPPORT KIT - SQUARE

This kit provides the support and termination parts required for a chimney system that is supported by a flat or cathedral ceiling and passes through an attic area and penetrates the roof

Prod.#	Part #	Size	Per Carton	Parts Included in Kit
0842206	6U1-SCSK	6"	1	• Attic Insulation Shield (AIS)
0842207	7U1-SCSK	7"	1	• Ceiling/Cathedral Support - Square (SBCS)
0842208	8U1-SCSK	8"	1	• Round Top Termination Cap (CT)
				• Smoke Pipe Adapter (SPA)

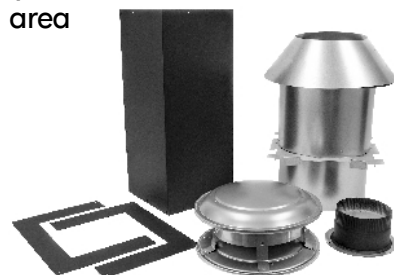

CEILING/CATHEDRAL SUPPORT KIT - ROUND

This kit provides the support and termination parts required for a chimney system that is supported by a flat or cathedral ceiling and passes through an attic area and penetrates the roof

Prod.#	Part #	Size	Per Carton	Parts Included in Kit
0844706	6U1-CSK	6"	1	• Attic Insulation Shield (AIS)
0844707	7U1-CSK	7"	1	• Ceiling/Cathedral Support - Round (RBCS)
0844708	8U1-CSK	8"	1	• Round Top Termination Cap (CT)
				• Smoke Pipe Adapter (SPA)



WALL SUPPORT KIT

This kit is used for a wall-supported chimney system with a horizontal connection passing through an exterior wall, connecting to an Insulated Tee and running vertically up the exterior wall to terminate above the roof line.

Prod.#	Part #	Size	Per Carton	Parts Included in Kit
0829806	6U1-WSK	6"	1	• Wall Support (WSP)
0829807	7U1-WSK	7"	1	• Insulated Tee w/Insulated Tee Cap (IT)
0829808	8U1-WSK	8"	1	• Insulated Wall Thimble (IWT)
				• Wall Band (WB)
				• Smoke Pipe Adapter (SPA)
				• Round Top Termination Cap (CT)



EXTENDED WALL SUPPORT KIT

This kit is used for a through-the-wall installation to support a vertical system above the Insulated Tee. It allows the chimney to pass by a 12" overhang but will not work if installation is less than 5-1/2" from a vertical wall.

Prod.#	Part #	Size	Per Carton	Parts Included in Kit
0829906	6U1-EWSK	6"	1	• Extended Wall Support (EWT)
0829907	7U1-EWSK	7"	1	• Insulated Tee w/Insulated Tee Cap (IT)
0829908	8U1-EWSK	8"	1	• Insulated Wall Thimble with Trim Collar (IWT)
				• Wall Band (WB)
				• Smoke Pipe Adapter (SPA)
				• Round Top Termination Cap (CT)
				• Tee Cap Retainer




Typical Installation

CEILING SUPPORT INSTALLATIONS


One Story



Two Story

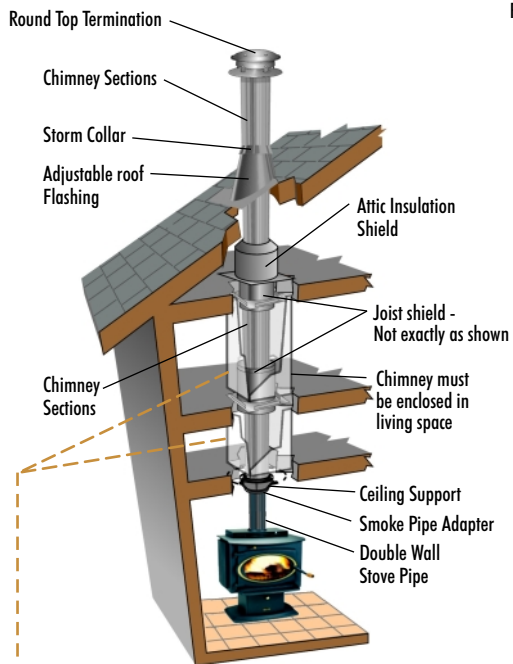


Elbow Installation

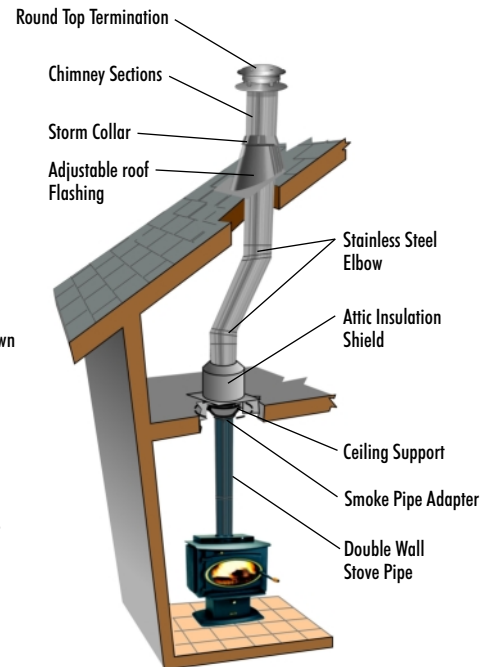

NOTE: An installation in Canada will require a Supplemental Radiation Shield where the chimney system is enclosed in living or attic spaces


CEILING SUPPORT INSTALLATIONS

With Square Ceiling/Cathedral Support

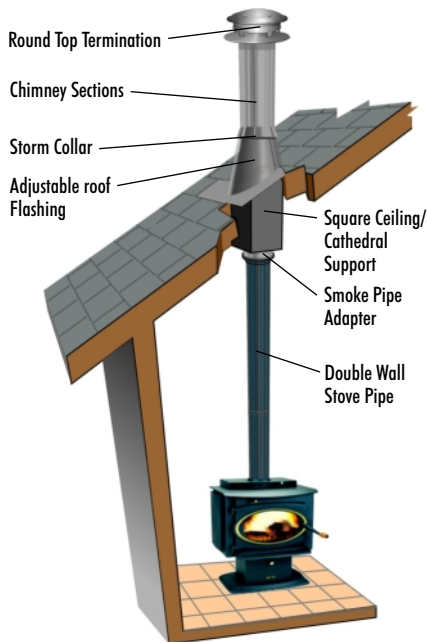


WALL SUPPORT INSTALLATIONS

One Story

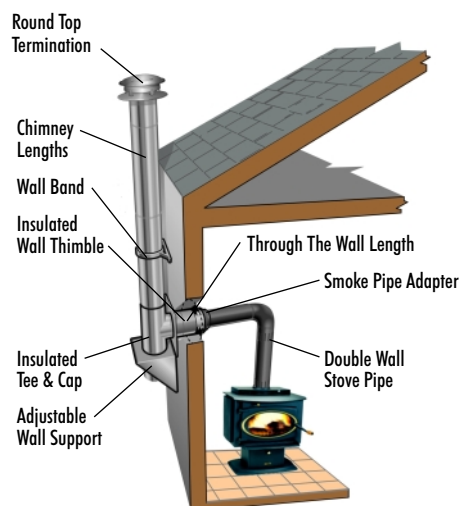

Through a soffit

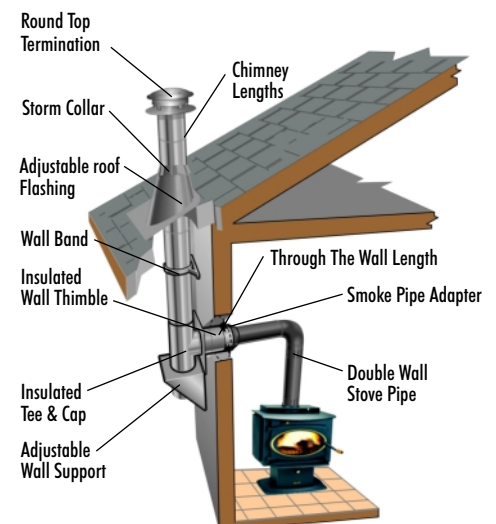

USE DCC STOVE PIPE FOR OPTIMUM SYSTEM PERFORMANCE

Note: Technical data, photographs, drawings and installations may vary and are for reference only. Actual installations must be conducted according to the data and drawings shown in the installation instructions.

NOTES

Lined area for notes.

NOTES



RESIDENTIAL AND COMMERCIAL: VENT | CHIMNEY | GRILLES | REGISTERS | DIFFUSERS

United States
5030 Corporate Exchange Blvd.
Grand Rapids, MI 49512

1.800.992.VENT (8368)
info@selkirkcorp.com



selkirkcorp.com

Canada
375 Green Road
Stoney Creek, ON L8E 4A5

1.888.SELKIRK (735.5475)
cscanada@selkirkcorp.com