



7052 Clay

	US Units	Metric Units
Style Number	1022V	
Construction	SPC	
Profile	Fold-N-Tap	
Size	12" x 24"	30.48 cm x 60.96 cm
Overall Thickness	0.217"	5.5 mm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Attached Underlayment	EVA Pad	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	ScuffResist	
Edge Description	Accent Bevel	
Area per Carton	15.83 sq ft	1.47 sq m
Area per Pallet	1139.76 sq ft	105.89 sq m
Installation	Floating	
Installation Grade	Above, On, Below	
Color Variation	Yes	
Ortho-Phthalates Free	Yes	
FloorScore Certified	Yes	
Residential Warranty	Lifetime Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof	
Commercial Warranty	10 Year Light Commercial	
Smoke Density (ASTM E662, Flaming Mode)	Passes, <450	
Radiant Panel (ASTM E648)	Passes, Class I	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Features


Paragon Tile Plus features 100% waterproof 12" x 24" tiles built to endure stains, scuffs, spills and dents from high traffic and extreme conditions. Plus, it save you time and money on easy installation with no messy grout, adhesives or subfloor prep —simply install and live on in the same day. All Paragon Tile Plus styles come with ScufResist Platinum® finish and attached Soft Silence® acoustical pad.

Colors



Paragon Tile Plus

floortē® **TILE**series

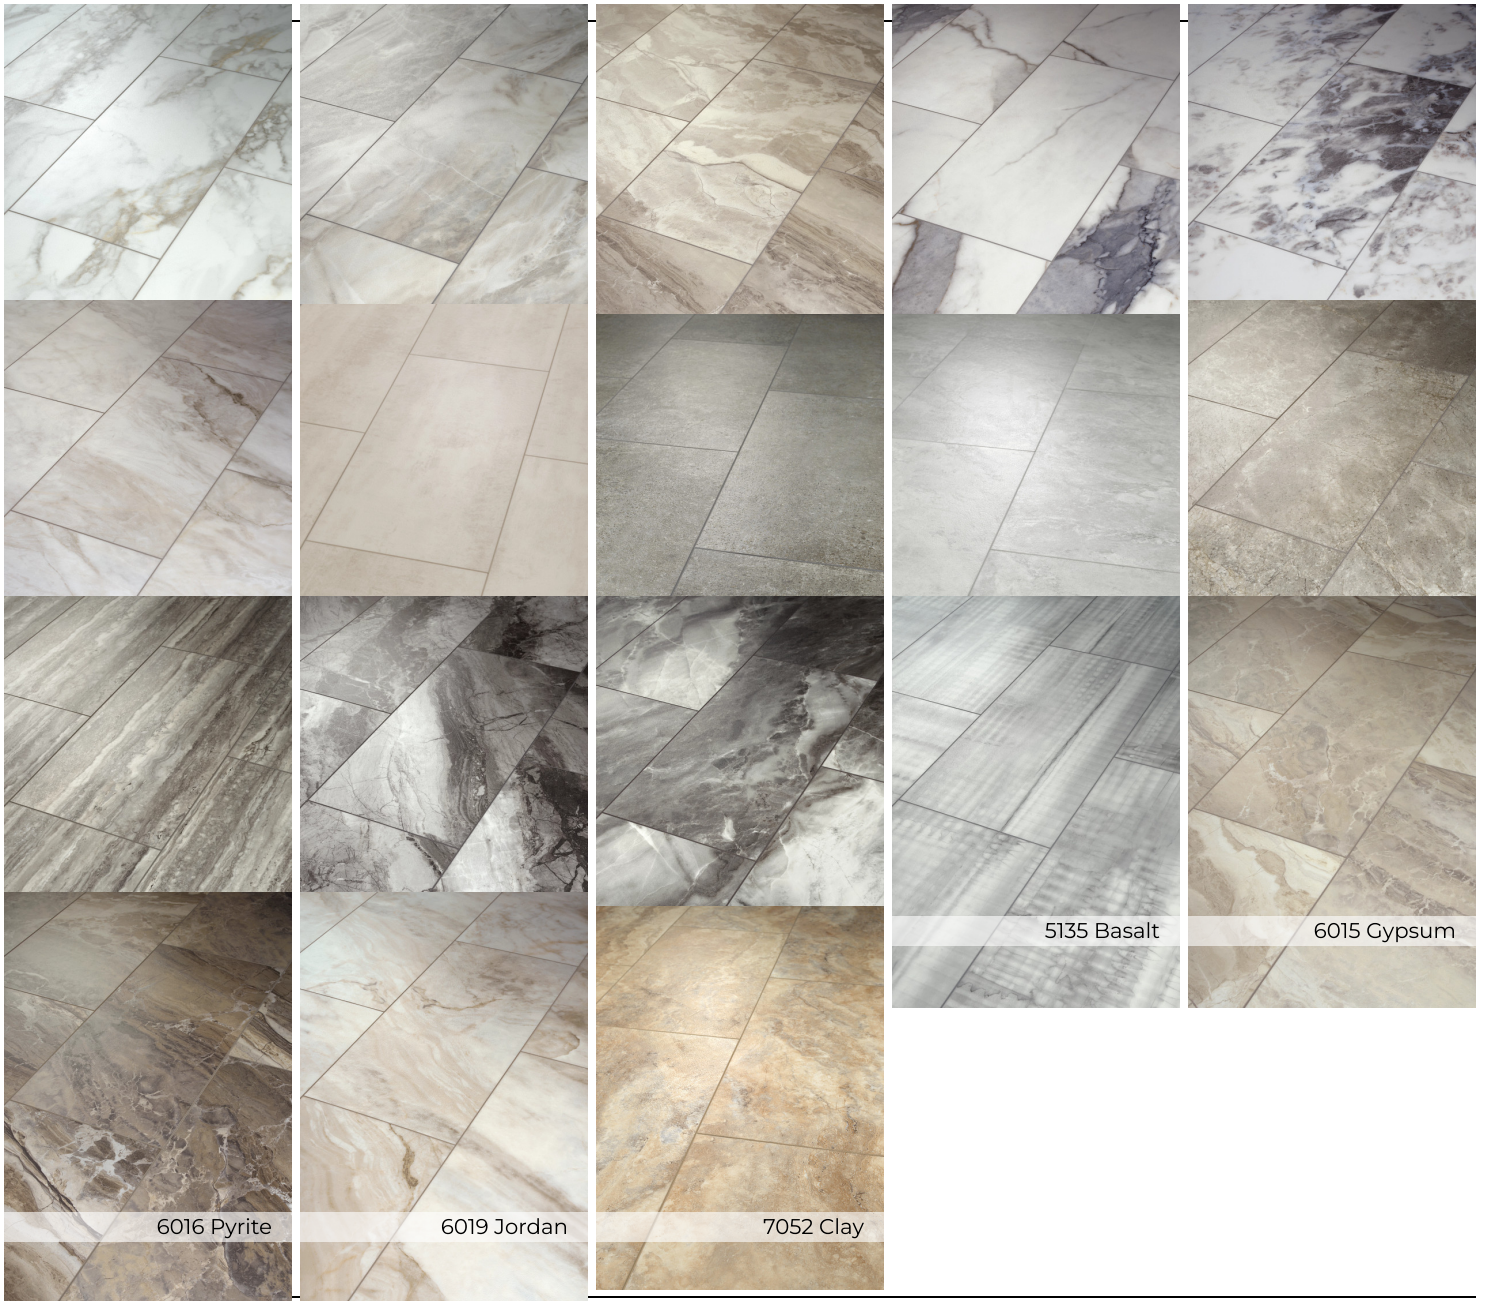

5135 Basalt


6015 Gypsum

6016 Pyrite

6019 Jordan

7052 Clay

Coordinating Trim



Baby Threshold*

BT3HS | 94"


VSBTB | 94"



T-Molding*

TM3HS | 94"

VSTM6 | 94"



Multi-Purpose Reducer

VSMP6 | 94"



Quarter Round

VSQT6 | 94"



Flush Stairnose

VFSN1 | 94"

*Packaged with molding track

SOFT SILENCE 
ACOUSTICAL PAD






shawfloors.com

Shaw
BUILDER + MULTIFAMILY

For reference purposes only if printed or downloaded.

Coordinating Metal Trim



Finish	Reducer	T-Mold	Stair Cap
Satin Silver	143SA	146SA	140SA
Satin Nickel	144SA	147SA	141SA
Dark Bronze	145SA	148SA	142SA

Installation Range

Profile Size	Installation Range
3.5mm	1.5mm to 3.5mm heights
5.5mm	3.6mm to 5.5mm heights
8mm	6mm to 8mm heights

