




COREtec - One Plus

Product Specifications


Style Number	VV585	
Construction	Waterproof Foamed Core	
Edge Profile	Micro Bevel	
Nominal Dimensions	6" wide, 48" long	
	US Units	Metric Units
Actual Product Width	5.91"	15 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	12 mil (0.012")	0.3 mm
Overall Product Thickness	0.255"	6.5 mm
Core Thickness	0.217"	5.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.039"	1 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	

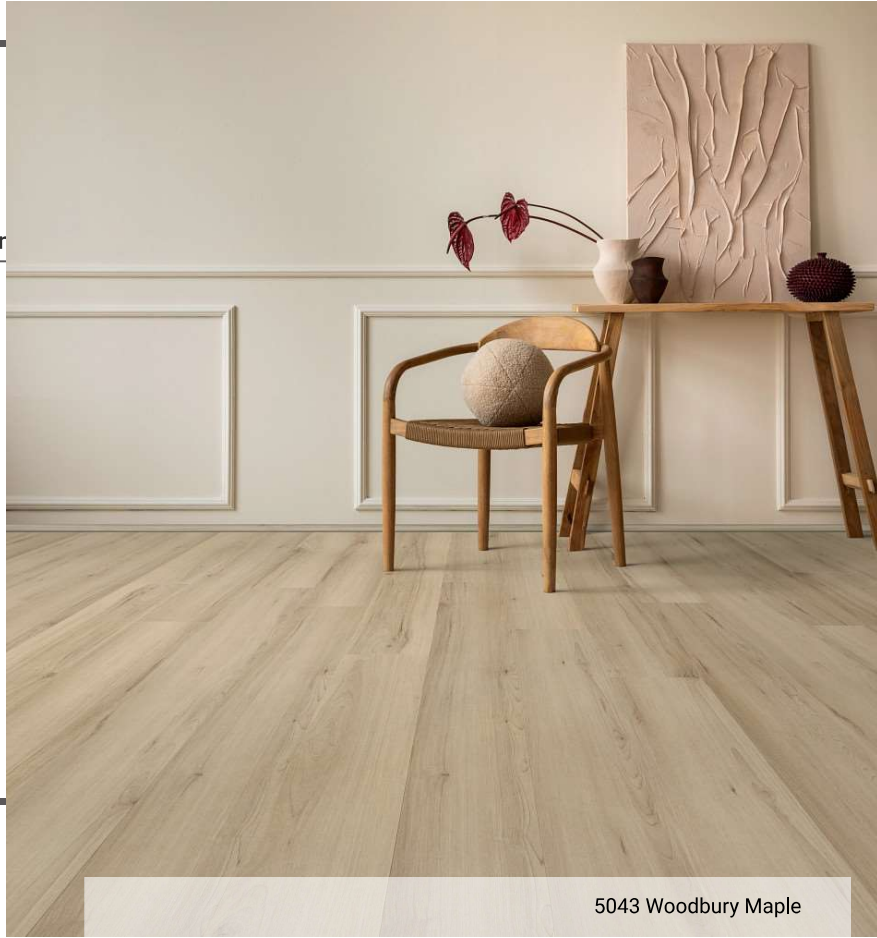

5043 Woodbury Maple

Packaging

Area per Box	31.52 sq ft	3 sq m
Pieces per Box	16 pcs	
Weight per Box	45.5 lbs	20.63 kg
Boxes per Pallet	42 boxes	

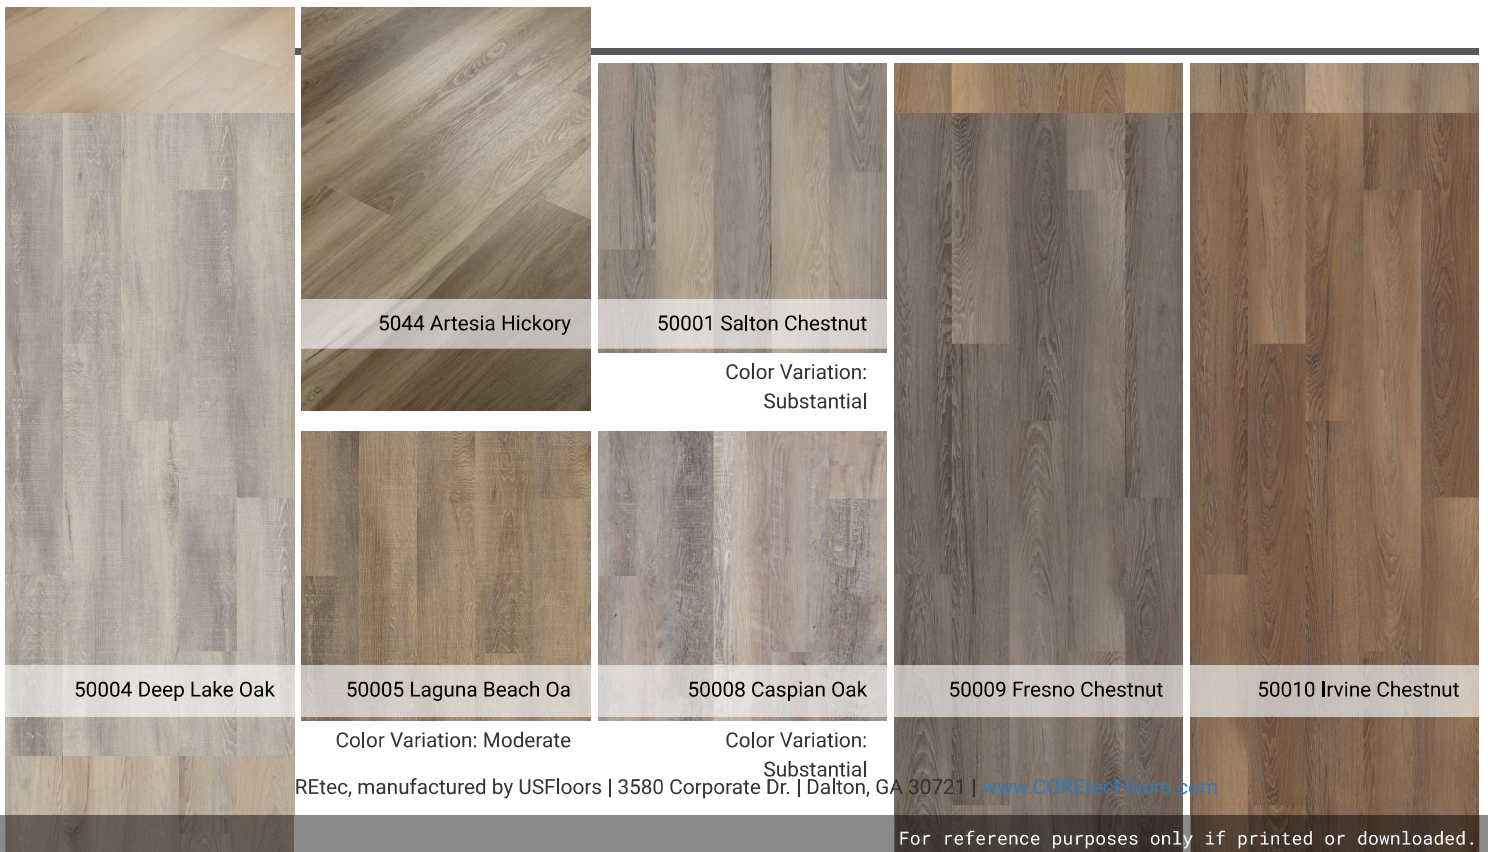

REtec, manufactured by USFloors | 3580 Corporate Dr. | Dalton, GA 30721 | www.COREtecFloors.com

For reference purposes only if printed or downloaded.



us

50012 Venture Chestnu

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.


Warranties

- USF 25 Years
- [Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof](#)
- 5 Year Light Commercial


Coordinating Trim




Baby Threshold*
BT3HU | 94"



T-Molding*
02V30 | 94"



Quarter Round
01V33 | 94"



Flush Stairnose
FS5CT | 94"
02V18 | 94"

*Packaged with molding track

Stair Tread



Stair Tread
03Z70 | 48"