



DRIVEN BY **PERFORMANCE™**

PRODUCT CATALOG

RESIDENTIAL | COMMERCIAL | INDUSTRIAL

THE SIMPSON® *ADVANTAGE*

Driven by Performance™ for more than 50 years, SIMPSON continues to provide the advantage you need to get the job done right every time. We design, engineer and manufacture products that are reliable, durable, and built to perform every time you need them. Whether you are a DIYer or an industry pro, SIMPSON offers an enhanced experience with professional results guaranteed. Join the historic journey and take the **ADVANTAGE!**



TABLE OF CONTENTS

3	RESIDENTIAL PRESSURE WASHERS
4	CLEAN MACHINE® SERIES
5	PREMIUM RESIDENTIAL PRESSURE WASHERS
6	MEGASHOT™ SERIES
8	COMMERCIAL PRESSURE WASHERS
9	POWERSHOT™ SERIES
10	PRO SERIES
10	ALUMINUM SERIES
11	WATER BLASTER® SERIES
13	INDUSTRIAL PRESSURE WASHERS
14	INDUSTRIAL SERIES
14	WATER SHOTGUN® SERIES
15	SUPER PRO ROLL CAGE SERIES
17	HOT WATER PRESSURE WASHERS
18	BRUTE SERIES
19	MOBILE TRAILER PRESSURE WASHERS
21	PORTABLE GENERATORS
22	COMMERCIAL SERIES
24	INDUSTRIAL SERIES
27	INVERTER AND PARALLEL BOX
29	HIGH PERFORMANCE HOSES
35	PREMIUM ACCESSORIES
38	POWERBOOST® TECHNOLOGY
39	PRESSURE WASHER PUMP KITS
41	BECOME A DEALER
42	CETA® TESTING STANDARDS

RESIDENTIAL PRESSURE WASHERS

SIMPSON's residential pressure washers are perfect for the homeowner or the DIYer. These compact gas and electric pressure washers are lightweight, easy to move and store and provide powerful cleaning results for light to medium duty applications. These models are equipped with SIMPSON gas engines or electric motors, and OEM Technologies™ pumps. Producing a PSI range of ratings from 2300 to 3400, SIMPSON's residential line will make easy work of the toughest home projects.



"I live in a row house and needed something small for storage, but could help me keep the exterior of my home clean. This machine folds down, fits in narrow spaces and impressed me with its cleaning power! I highly recommend it!"

Jackie, Kansas City, MO - CM60912



Check out more of our product reviews at SIMPSONCLEANING.COM



RESIDENTIAL PRESSURE WASHERS

CLEAN MACHINE® SERIES



LIMITED WARRANTY
2YR ENGINE
1YR MOTOR
1YR PUMP
1YR FRAME



BONUS!
Includes on board soap tank



BONUS!
Includes on board soap tank



MODEL NUMBER	CM60976(-S)	CM60912(-S)
PART NUMBER	60976 (61016)	60912 (60972)
PRESSURE RATING	2300 PSI	2400 PSI
FLOW RATING	1.2 GPM	2.0 GPM
ENGINE/MOTOR	SIMPSON® 120V Electric Motor	SIMPSON® 149cc
PUMP	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22	1/4" x 25' x M22
TIRE/WHEEL	10" Never-flat	6" Never-flat



BONUS!
Includes on board soap tank



MODEL NUMBER	CM61081(-S)	CM61082(-S)	CM61083(-S)
PART NUMBER	(61081)	(61082)	(61083)
PRESSURE RATING	2800 PSI	3200 PSI	3400 PSI
FLOW RATING	2.3 GPM	2.4 GPM	2.5 GPM
ENGINE	SIMPSON® OHV	SIMPSON® OHV	SIMPSON® OHV
PUMP	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22	1/4" x 25' x M22	5/16" x 25' x M22
TIRE/WHEEL	8" Never-flat	12" Never-flat	10" Premium Pneumatic

(-S) Indicates shippable packaging



PREMIUM RESIDENTIAL PRESSURE WASHERS

SIMPSON's premium residential line of pressure washers provide an optimal experience with minimal effort. The lightweight design of these machines make it easy for one person to move, use, and store. With models featuring SIMPSON®, HONDA®, KOHLER®, or BRIGGS & STRATTON® engines, these machines produce a range of PSI ratings from 2800 to 3300, helping you tackle the task at hand.



"I did a lot of research before I bought the SIMPSON MSH3125-S because this was the first pressure washer that I would own. I have had the machine for 2 weeks now and have cleaned my stamped patio and my composite 12' x 26' porch. Well, I should say that my wife used the machine on the patio and I used it on the porch and we thought it worked great. It exceeded my expectations for power and ease of use. Truly a good buy."

- Joe and Linda, Blasdell, New York- MSH3125-S



Check out more of our product reviews at SIMPSONCLEANING.COM



PREMIUM RESIDENTIAL PRESSURE WASHERS

MEGASHOT™ SERIES VERTICAL



LIMITED WARRANTY



BONUS!

Includes Dial-N-Wash® spray gun



MODEL NUMBER	MS60773(-S)
PART NUMBER	60773 (60784)
PRESSURE RATING	2800 PSI
FLOW RATING	2.3 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat

BONUS!

Includes on board soap tank



MODEL NUMBER	MS61048(-S)*
PART NUMBER	61048 (61061)
PRESSURE RATING	2800 PSI
FLOW RATING	2.3 GPM
ENGINE	BRIGGS & STRATTON® 725 EXI
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22 Hose
TIRE/WHEEL	12" Never-flat

BONUS!

Includes on board soap tank



MODEL NUMBER	MS61001(-S)
PART NUMBER	(61013)
PRESSURE RATING	3000 PSI
FLOW RATING	2.3 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat

*Contact a Sales Representative for availability. See page 41 for information.

BONUS!

Includes Dial-N-Wash® spray gun



MODEL NUMBER	MS61039
PART NUMBER	61039
PRESSURE RATING	3000 PSI
FLOW RATING	2.4 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat

BONUS!

Includes 15" surface cleaner & on board soap tank



MODEL NUMBER	MS60809(-S)
PART NUMBER	(60809)
PRESSURE RATING	3000 PSI
FLOW RATING	2.4 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat



MODEL NUMBER	MS60805(-S)
PART NUMBER	(60808)
PRESSURE RATING	3000 PSI
FLOW RATING	2.4 GPM
ENGINE	HONDA® GCV160
PUMP	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	12" Never-flat

(-S) Indicates shippable packaging

PREMIUM RESIDENTIAL PRESSURE WASHERS

MEGASHOT™ SERIES HORIZONTAL



GAS POWERED



LIMITED WARRANTY



BONUS!
Includes 5-N-1 Nozzle



MODEL NUMBER	MS61043(-S)*	MS60763(-S)	MS31025HT	MS60921
PART NUMBER	61043/60167 (61066/ 60168)	(60763)	60652	60921
PRESSURE RATING	3000 PSI	3100 PSI	3200 PSI	3300 PSI
FLOW RATING	2.4 GPM	2.4 GPM	2.5 GPM	2.4 GPM
ENGINE	SIMPSON® 212cc	KOHLER® RH265	HONDA® GC190	HONDA® GC190
PUMP	OEM Technologies™ Axial Cam			
HOSE	1/4" x 25' x M22, MorFlex®			
TIRE/WHEEL	10" Premium Pneumatic	12" Never-flat	10" Premium Pneumatic	10" Premium Pneumatic

*Contact a Sales Representative for availability
See page 41 for information

BONUS!
Includes 15" surface cleaner



MODEL NUMBER	MSH3125(-S)	MS61049(-S)*	MS61033(-S)
PART NUMBER	(60551)	61049 (61062)	(61033)
PRESSURE RATING	3200 PSI	3300 PSI	3300 PSI
FLOW RATING	2.5 GPM	2.4 GPM	2.4 GPM
ENGINE	HONDA® GC190	HONDA® GC190	HONDA® GC190
PUMP	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam	OEM Technologies™ Axial Cam
HOSE	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®	1/4" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic

*Contact a Sales Representative for availability
See page 41 for information

(-S) Indicates shippable packaging
Part numbers 61043 & 61066 are equipped with 49 State engines, not to be sold in California

COMMERCIAL PRESSURE WASHERS

As a pioneer in the pressure washer industry, SIMPSON® has led the way in providing functional innovation for cleaning professionals. With a selection of models providing PSI ratings from 3300 to 4400, our commercial line provides the power pros need. These machines are built to last with strong steel or aluminum frames, reliable SIMPSON or HONDA® engines, and commercial grade pumps.



"I did a lot of research on pressure washers and I decided to purchase this one because the price was excellent. I was not surprised how well this machine works since I had read several reviews. The first pull, the machine started and it is much quieter than most other pressure washers. Since it is a commercial product, I expect it to last for years to come. Great value, great product."

-Tim, Monroe, NC, USA - PS3228-S



Check out more of our product reviews at SIMPSONCLEANING.COM



POWERED by SIMPSON POWERED by HONDA

COMMERCIAL PRESSURE WASHERS



POWERSHOT™ SERIES

GAS POWERED



LIMITED WARRANTY



BONUS!
Includes 15"
surface cleaner



MODEL NUMBER	PS3228(-S) <small>POWER BOOST</small>	PS61002(-S) <small>POWER BOOST</small>	PS61050(-S) <small>POWER BOOST</small>	PS60995(-S) <small>POWER BOOST</small>
PART NUMBER	(60629)	61002 (61014)	61050 (61063)	60995 (60996)
PRESSURE RATING	3300 PSI	3500 PSI	3500 PSI	3600 PSI
FLOW RATING	2.5 GPM	2.5 GPM	2.5 GPM	2.5 GPM
ENGINE	HONDA® GX200	HONDA® GX200	HONDA® GX200	HONDA® GX200
PUMP	AAA™ Triplex	AAA™ AX300 Axial Cam	AAA™ AX300 Axial Cam	AAA™ Triplex
HOSE	5/16" x 25' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®	5/16" x 25' x M22, MorFlex®
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic

COMMERCIAL PRESSURE WASHERS



PRO SERIES

GAS POWERED



LIMITED WARRANTY



VISIT WWW.SIMPSONCLEANING.COM/EPP FOR DETAILS



MODEL NUMBER	PS61044(-S) <small>POWER BOOST</small>	PS60982 <small>POWER BOOST</small>	PS60918 <small>POWER BOOST</small>
PART NUMBER	61044 (61064)	60982	60918
PRESSURE RATING	3400 PSI	3700 PSI	4000 PSI
FLOW RATING	2.3 GPM	2.5 GPM	3.5 GPM
ENGINE	HONDA® GS190	HONDA® GX200	HONDA® GX270
PUMP	AAA™ AX300 Pro Axial	AAA™ Triplex	AAA™ Triplex
HOSE	5/16" x 25' x M22, MorFlex®	5/16" x 50' x M22, MorFlex®	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	10" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic

ALUMINUM SERIES

GAS POWERED



LIMITED WARRANTY



MODEL NUMBER	PS3835 <small>POWER BOOST</small>	PS60869 <small>POWER BOOST</small>	PS4240	PS60843
PART NUMBER	60579	60869	60456	60843
PRESSURE RATING	3800 PSI	4000 PSI	4200 PSI	4400 PSI
FLOW RATING	3.5 GPM	3.5 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX270	HONDA® GX270	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	AAA™ Triplex	AAA™ Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic



MODEL NUMBER	ALH3228(-S)	ALH3425(-S) <small>POWER BOOST</small>	ALH4240
PART NUMBER	(60735)	60768 (60689)	60688
PRESSURE RATING	3400 PSI	3600 PSI	4200 PSI
FLOW RATING	2.5 GPM	2.5 GPM	4.0 GPM
ENGINE	HONDA® GX200	HONDA® GX200	HONDA® GX390
PUMP	CAT PUMPS® Triplex	AAA™ Triplex	CAT PUMPS® Triplex
HOSE	5/16" x 25' x QC, Steel-braided Monster	5/16" x 35' x M22, MorFlex®	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	13" Premium Pneumatic

COMMERCIAL PRESSURE WASHERS



ALUMINUM WATER BLASTER® SERIES

GAS POWERED



LIMITED WARRANTY



MODEL NUMBER	ALWB60827	ALWB60828	ALWB60825
PART NUMBER	60827	60828	60825
PRESSURE RATING	4200 PSI	4200 PSI	4400 PSI
FLOW RATING	4.0 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX390	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	CAT PUMPS® Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic

WATER BLASTER® SERIES

GAS POWERED



LIMITED WARRANTY



MODEL NUMBER	WB4200	WB60824
PART NUMBER	60205	60824
PRESSURE RATING	4200 PSI	4400 PSI
FLOW RATING	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX390	SIMPSON® 420cc
PUMP	AAA™ Triplex	AAA™ Triplex
HOSE	3/8" x 50' x QC, Steel-braided Monster	3/8" x 50' x QC, Steel-braided Monster
TIRE/WHEEL	13" Premium Pneumatic	13" Premium Pneumatic



INDUSTRIAL PRESSURE WASHERS

The industrial line provides a selection of extra-tough, cold-water machines. Equipped with reliable SIMPSON®, HONDA®, KOHLER®, or VANGUARD® engines, and commercial grade pumps that deliver pressure ratings between 2700 to 7000 PSI. SIMPSON's industrial pressure washers are perfect for conquering any industrial cleaning task.



INDUSTRIAL SERIES

EFFICIENT PERFORMANCE

Featuring high performance engines and AAA™ or COMET industrial grade pumps. Our AAA™ Triplex pumps are equipped with a bolt-on external unloader and bypass hose. Models include either steel or aircraft grade aluminum frames.



WATER SHOTGUN® SERIES

ICONIC DESIGN

Featuring patented innovations and superior craftsmanship. Equipped with COMET bolt-on external unloader and bypass hose, with heavy duty aluminum frames.



SUPER PRO ROLL CAGE SERIES

FORTIFIED DURABILITY

Featuring heavy gauge 1.5" welded steel frame design, strong steel lifting points, and a powerful mix of industrial engine and pump combinations

"I have a window cleaning and pressure washing business, and for the money there is nothing that compares, great machine, tons of power. The customer service is excellent, needed a part for the pump and they sent it right out to me. Couldn't be more happy with the performance and customer service."

-Bernie, La Quinta, CA-IR61029



Check out more of our product reviews at SIMPSONCLEANING.COM



INDUSTRIAL PRESSURE WASHERS



INDUSTRIAL SERIES



LIMITED WARRANTY



MODEL NUMBER	PART NUMBER	PRESSURE RATING	FLOW RATING	DRIVE	ENGINE	PUMP	TIRE/WHEEL	HOSE
IR61023 ¹	61023	2700 PSI	2.7 GPM	DIRECT	HONDA® GC190	AAA™ AX300 Pro Axial	10" Foam Filled	5/16" x 50' x QC, Steel-braided Monster
IR61022 ¹	61022	3000 PSI	2.7 GPM	DIRECT	HONDA® GX200	AAA™ AX300 Pro Axial	10" Foam Filled	5/16" x 50' x QC, Steel-braided Monster
IR61024 ²	61024	3000 PSI	3.0 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Foam Filled	3/8" x 50' x QC, Steel-braided Monster
IR61026 ²	61026	3500 PSI	4.0 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster
IR61028 ²	61028	4400 PSI	4.0 GPM	DIRECT	HONDA® GX390	AAA™ Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster
IR61029 ²	61029	4400 PSI	4.0 GPM	DIRECT	SIMPSON® 420cc	AAA™ Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster
IR61030 ²	61030	4200 PSI	4.0 GPM	BELT	HONDA® GX390	COMET Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel-braided Monster

¹ Black welded heavy gage steel frame, powdered coated for corrosion resistance

² Ultra lightweight aircraft grade aluminum frame

WATER SHOTGUN® SERIES



LIMITED WARRANTY



Includes external fuel tank

MODEL NUMBER	WS4050V	WS5050H
PART NUMBER	60242	60243
PRESSURE RATING	4000 PSI	5000 PSI
FLOW RATING	5.0 GPM	5.0 GPM
ENGINE	VANGUARD® V-Twin / E-Start	HONDA® GX630 / E-Start
PUMP	COMET Premium Series	COMET Premium Series
HOSE	3/8" x 50' x QC, Steel-braided Rubber	3/8" x 50' x QC, Steel-braided Rubber
TIRE/WHEEL	13" Premium Aluminum	13" Premium Aluminum

*Battery not included. Requires 12V Garden tractor battery type U1

*Battery not included. Requires 12V Garden tractor battery type U1

INDUSTRIAL PRESSURE WASHERS

SUPER PRO ROLL CAGE SERIES

GAS POWERED



HEAVY DUTY HOSE REELS AVAILABLE

SOLD SEPARATELY. SEE NEXT PAGE FOR DETAILS OR PAGE 37.

LIMITED WARRANTY

OUR BEST ENGINE COVERAGE
5 YEAR EXTENDED PROTECTION PLUS
HONDA GX & SIMPSON ENGINES
VISIT WWW.SIMPSONCLEANING.COM/EPP FOR DETAILS

3YR ENGINE
7YR PUMP
10YR FRAME



SMALL

31" x 24.25" x 28.25"



MEDIUM

42" x 36.25" x 33.5"



LARGE

47.5" x 29.5" x 38.5"

Large external fuel tank for extended run time

WITH HIGH-PERFORMANCE INDUSTRIAL FEATURES



High & low pressure mountable hose reels available. (Sold separately from unit.)

Built for the tough jobs with SIMPSON®, HONDA® or KOHLER® engines.



Strong steel lifting points for quick crane lifting and reinforced welded design with solid wheel axle for easy forklift transfer.



Bolt-on external unloader with bypass hose provides durability for extended pump life



Four wheel, heavy gauge 1.5" steel frame design with a wheel locking brake system.



INDUSTRIAL PRESSURE WASHERS

SUPER PRO ROLL CAGE SERIES FEATURES

GAS POWERED



LIMITED WARRANTY

OUR BEST ENGINE COVERAGE
5 YEAR EXTENDED PROTECTION PLUS
HONDA GX & SIMPSON ENGINES
VISIT WWW.SIMPSONCLEANING.COM/EPP FOR DETAILS

3YR ENGINE
7YR PUMP
10YR FRAME

	MODEL NUMBER	PART NUMBER	PRESSURE RATING	FLOW RATING	DRIVE	ENGINE	PUMP	TIRE/WHEEL	HOSE
SMALL	SW3625HADS	65200	3600 PSI	2.5 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
	SW3030HADS	65221	3000 PSI	3.0 GPM	DIRECT	HONDA® GX200	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
	SW3625SADS	65202	3600 PSI	2.5 GPM	DIRECT	SIMPSON® 208cc	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
	SW3030SADS	65222	3000 PSI	3.0 GPM	DIRECT	SIMPSON® 224cc	AAA™ Industrial Triplex	10" Premium Pneumatic	5/16" x 25' x QC, Steel Braided
MEDIUM	SW4035HADM	65203	4000 PSI	3.5 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW3540HADM	65223	3500 PSI	4.0 GPM	DIRECT	HONDA® GX270	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4440HCDM	65206	4400 PSI	4.0 GPM	DIRECT	HONDA® GX390	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4440SCDM	65208	4400 PSI	4.0 GPM	DIRECT	SIMPSON® 420cc	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4440HCBM	65209	4200 PSI	4.0 GPM	BELT	HONDA® GX390	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4240SABM	65224	4200 PSI	4.0 GPM	BELT	SIMPSON® 420cc	AAA™ Industrial Triplex	10" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
LARGE	SW4050VCGL	65212*	4000 PSI	5.0 GPM	GEAR	VANGUARD® 570cc	COMET Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW5050HCGL	65213*	5000 PSI	5.0 GPM	GEAR	HONDA® GX690	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW6050KCGL	65214*	6000 PSI	5.0 GPM	GEAR	KOHLER® CH750	COMET Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW7040KCGL	65215*	7000 PSI	4.0 GPM	GEAR	KOHLER® CH750	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW3080HUGL	65217*	3000 PSI	8.0 GPM	GEAR	HONDA® GX690	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided
	SW4060SUGL	65219*	4000 PSI	6.0 GPM	GEAR	SIMPSON® 679cc	UDOR® Industrial Triplex	13" Premium Pneumatic	3/8" x 50' x QC, Steel Braided

*Battery not included. Requires 12V Garden tractor battery type U1

HOSE REELS ALSO LISTED IN ACCESSORIES SECTION ON PAGE 37



PART NUMBER	80399	80403
MAX PRESSURE	5000 PSI	5000 PSI
MAX TEMP	212° F	212° F
HOSE CAPACITY	100' x 3/8"	200' x 3/8"
MATERIAL	Heavy-duty Steel Construction	Heavy-duty Steel Construction

HOSE REEL INSTALLATION KITS ALL INSTALLATION KITS COME COMPLETE WITH JUMPER HOSES & HARDWARE. INSTALLATION KITS MUST BE PURCHASED IN ORDER FOR HOSE REEL TO BE CONNECTED TO UNIT.

PART #	80381	80382	80383
DESCRIPTION	Roll Cage low pressure kit	Small Roll Cage high pressure kit	M/L Roll Cage high pressure kit

HOT WATER PRESSURE WASHERS

With a series of hot water machines ranging in size, SIMPSON's Brute series is designed to perform in a variety of industrial cleaning situations. This robust lineup of hot-water pressure washers feature commercial engines powered by SIMPSON®, HONDA®, VANGUARD® or BRIGGS & STRATTON®. Equipped with either premium AAA™, CAT PUMPS®, COMET, or UDOR® industrial-grade pumps, professionals everywhere rely on Simpson's Brute series to get the job done right.



"The performance of this pressure washer really surprised me. Started easily, ran smoothly and the 50 feet of hose was the perfect length to allow me to reach where I needed to."

-Tony, New York City, NY- MB1518



Check out more of our product reviews at SIMPSONCLEANING.COM



HOT WATER PRESSURE WASHERS

BRUTE SERIES

GAS POWERED ELECTRIC INDUCTION MOTOR



LIMITED WARRANTY



MINI BRUTE^{1,3}



KING BRUTE



KING BRUTE XL^{2,3}

	MB1518	KB3028	KBXL3540	KBXL3540H
MODEL NUMBER	MB1518	KB3028	KBXL3540	KBXL3540H
PART NUMBER	60363	65100	65120	65121
PRESSURE RATING	1500 PSI	3000 PSI	3500 PSI	3500 PSI
FLOW RATING	1.8 GPM	2.8 GPM	4.0 GPM	4.0 GPM
ENGINE/MOTOR	120 V Electric	BRIGGS & STRATTON® OHV 1100	SIMPSON® 420cc	HONDA® GX390
PUMP	AAA® Triplex	Cat Pumps® Industrial Triplex	AAA® Industrial Triplex	AAA® Industrial Triplex
ENGINE FUEL CAPACITY	N/A	.75 gal Gasoline	1.6 gal Gasoline	1.6 gal Gasoline
BURNER FUEL CAPACITY	4.0 gal Diesel	5.0 gal Diesel	5.5 gal Diesel	5.5 gal Diesel
DRIVE	Direct Drive	Direct Drive	Direct Drive	Direct Drive
START	Electric	Recoil	Recoil	Recoil/ E-Start
TIRE/ WHEEL	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic	13" Premium Pneumatic



BIG BRUTE^{2,3}



	BB65106	BB65105	BB65108
MODEL NUMBER	BB65106	BB65105	BB65108
PART NUMBER	65106	65105	65108
PRESSURE RATING	4000 PSI	4000 PSI	4000 PSI
FLOW RATING	4.0 GPM	4.0 GPM	4.0 GPM
ENGINE/MOTOR	HONDA® GX390	VANGUARD® V-Twin	VANGUARD® V-Twin
PUMP	COMET Industrial Triplex	COMET Industrial Triplex	UDOR Industrial Triplex
ENGINE FUEL CAPACITY	6.0 gal Gasoline	6.0 gal Gasoline	6.0 gal Gasoline
BURNER FUEL CAPACITY	11 gal Diesel	11 gal Diesel	11 gal Diesel
DRIVE	Direct Drive	Direct Drive	Gear Drive
START	Recoil/ E-Start	E-Start	E-Start
TIRE/ WHEEL	10" Premium Pneumatic	10" Premium Pneumatic	10" Premium Pneumatic



SUPER BRUTE^{2,3}

	SB3555	SB4066
MODEL NUMBER	SB3555	SB4066
PART NUMBER	65110	65115
PRESSURE RATING	3500 PSI	4000 PSI
FLOW RATING	5.5 GPM	6.6 GPM
ENGINE/MOTOR	VANGUARD® 570cc	SIMPSON® 679cc
PUMP	COMET Premium Series Industrial Triplex	UDOR Industrial Triplex
ENGINE FUEL CAPACITY	10 gal Gasoline	10 gal Gasoline
BURNER FUEL CAPACITY	10 gal Diesel	10 gal Diesel
DRIVE	Belt Drive	Gear Box
START	E-Start	E-Start
BASE	Forklift Feet / Permanent Mount	Forklift Feet / Permanent Mount

¹ MINI BRUTE includes a 15 amp high limit switch and 35' GFCI cord; not pictured
² Battery not included on E-Start units. Requires 12V Garden tractor battery Type U1
³ All Brute series models come standard with gun, lance, hose and nozzles

Contact a Sales Representative for more details. See page 41 for information.

MOBILE TRAILER PRESSURE WASHERS

SIMPSON's mobile pressure washing systems will handle a variety of tough commercial cleaning applications. These products are perfectly suited for contract cleaners, mobile detailers, municipalities, resorts, and many other professionals. SIMPSON trailers are NATM certified as an over-the-road pressure washer system.



"Investing in this pressure washer trailer has been one of the best investments I have made for my business! I can literally pull up to my customer sites and begin work without a water hookup necessary because of the huge water tank! Anyone with a pressure washer cleaning company should consider to add this to their fleet."

-Adam, Louisville, KY- 95003



Check out more of our product reviews at SIMPSONCLEANING.COM



POWERED by **HONDA** **VANGUARD**


MOBILE TRAILER PRESSURE WASHERS



LIMITED WARRANTY



- CUSTOM SUPERIOR CRAFTSMANSHIP
- THICK WALL RECTANGULAR STEEL TUBING

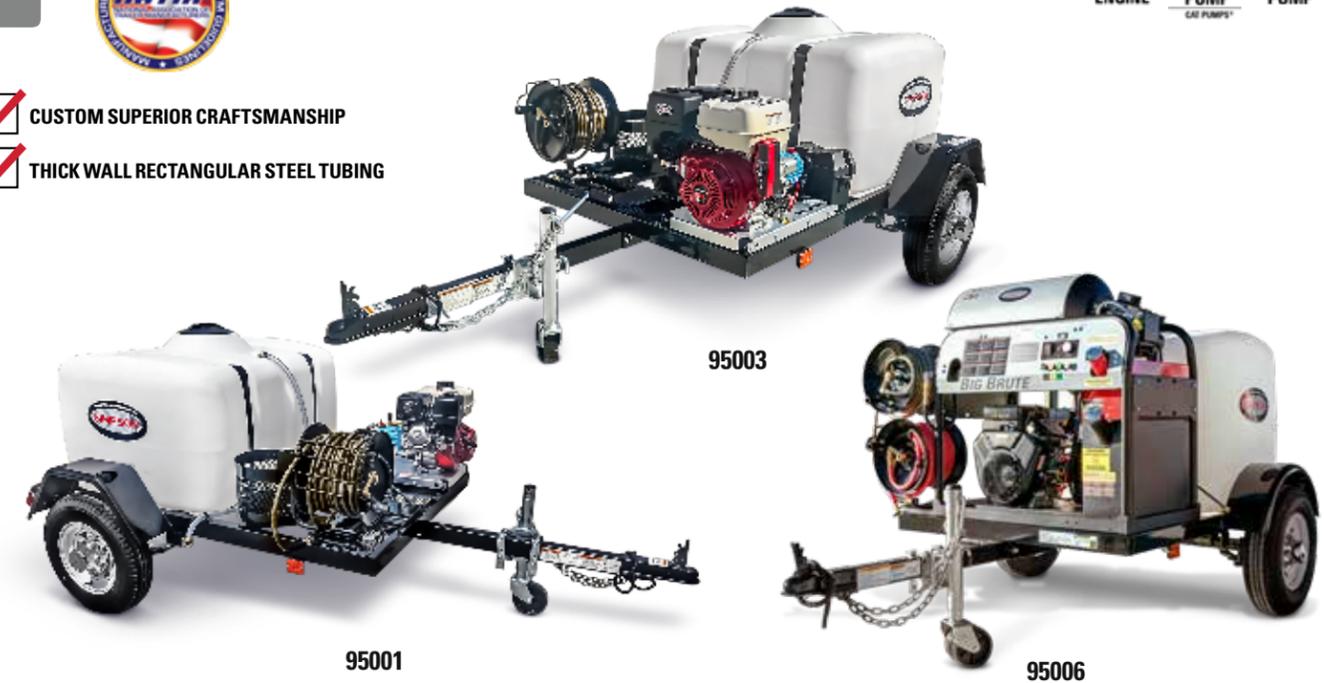

	STAGE 1A COLD WATER		STAGE 1B COLD WATER			STAGE 1C HOT WATER	
MODEL NUMBER	95000	95001	95002	95003	95004*	95005	95006
PRESSURE RATING	3200 PSI	3800 PSI	4200 PSI	4200 PSI	4200 PSI	4000 PSI	4000 PSI
FLOW RATING	2.8 GPM	3.5 GPM	4.0 GPM	4.0 GPM	4.0 GPM	4.0 GPM	4.0 GPM
ENGINE	HONDA® GX200	HONDA® GX270	HONDA® GX390	HONDA® GX390 w/ Recoil & E-Start	VANGUARD V-TWIN w/ E-Start	HONDA® GX390 w/ Recoil & E-Start	VANGUARD V-TWIN w/ E-Start
PUMP	CAT PUMPS® Triplex	CAT PUMPS® Triplex	CAT PUMPS® Triplex	CAT PUMPS® Triplex	CAT PUMPS® Triplex	COMET Triplex	COMET Triplex
TRAILER SIZE	7' Overall (4' x 4' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)	9' Overall (4' x 5.5' Platform)
TRAILER FRAME	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing	Rectangular thick wall steel tubing
AXLE RATING	2000 lbs	2000 lbs	2000 lbs	2000 lbs	2000 lbs	3500 lbs	3500 lbs
TIRE	12" 6-Ply	12" 6-Ply	12" 6-Ply	12" 6-Ply	12" 6-Ply	13" 6-Ply	13" 6-Ply
LIGHTING	LED	LED	LED	LED	LED	LED	LED
TRAILER HITCH BALL SIZE	2" Ball	2" Ball	2" Ball	2" Ball	2" Ball	2" Ball	2" Ball
WATER TANK SIZE	100 Gal	150 Gal	150 Gal	150 Gal	150 Gal	200 Gal	200 Gal
HIGH PRESSURE HOSE	3/8" x 50' Steel-braided Monster w/ OC	3/8" x 100' Armor Hose™ w/ OC	3/8" x 100' Armor Hose™ w/ OC				
HIGH PRESSURE HOSE REEL	100'	100'	100'	100'	100'	100'	100'
SUPPLY HOSE	N/A	N/A	N/A	N/A	N/A	3/4" x 75'	3/4" x 75'
SUPPLY HOSE REEL	N/A	N/A	N/A	N/A	N/A	Standard	Standard

*Battery not included. Requires 12V Garden tractor battery type U1

*With external fuel tank

PREMIUM GENERATORS

SIMPSON's portable generators are perfect for providing power at work sites, recreational facilities, residential locations, and more. Many are equipped with a foldable handle for ease of mobility and storage. Their heavy-duty roll cage frames provide durability and protection for the generator. Whether tailgating before a game, charging tools at a construction site, or providing backup power for your home, rely on SIMPSON® for your power needs.



"...I am very happy with this generator. It was easy to assemble and get running. It starts well and isn't too loud when running. It can handle 5500 watts, which is enough for my fridge, sump pump and a few other things. It had a large gas tank so it can run overnight without needing to be refilled. I also have a lot more peace of mind knowing I have a backup plan..."

-Scott, Grayslake, IL -SPG5568



Check out more of our product reviews at SIMPSONCLEANING.COM



PREMIUM GENERATORS COMMERCIAL SERIES

LIMITED WARRANTY **3YR** **6MON**
CONSUMER WARRANTY COMMERCIAL WARRANTY



MODEL NUMBER	SPG3600
PART NUMBER	70029
STARTING WATTS	4000
RUNNING WATTS	3600
AC VOLTAGE	120V
AC FREQUENCY	60 Hz
ENGINE	SIMPSON® OHV
DISPLACEMENT	212cc
VOLTAGE REGULATION	Automatic
START	Recoil
FUEL CAPACITY	3.4 gal Gasoline
TIRE/WHEEL	N/A
DIMENSIONS	27" x 23.1" x 20"
WEIGHT	101.4 lb



MODEL NUMBER	SPG3645
PART NUMBER	70005
STARTING WATTS	4500
RUNNING WATTS	3600
AC VOLTAGE	120V
AC FREQUENCY	60 Hz
ENGINE	SIMPSON® OHV
DISPLACEMENT	224cc
VOLTAGE REGULATION	Automatic
START	Recoil
FUEL CAPACITY	3.4 gal Gasoline
TIRE/WHEEL	8" Never-flat
DIMENSIONS	28.7" x 21.6" x 22.8"
WEIGHT	117.94 lb



MODEL NUMBER	SPG5568
PART NUMBER	70006
STARTING WATTS	6875
RUNNING WATTS	5500
AC VOLTAGE	120/240V
AC FREQUENCY	60 Hz
ENGINE	SIMPSON® OHV
DISPLACEMENT	420cc
VOLTAGE REGULATION	Automatic
START	Recoil
FUEL CAPACITY	6.1 gal Gasoline
TIRE/WHEEL	9" Never-flat
DIMENSIONS	31.1" x 21.6" x 23.8"
WEIGHT	194 lb



MODEL NUMBER	SPG7085E*
PART NUMBER	70010
STARTING WATTS	8500
RUNNING WATTS	7000
AC VOLTAGE	120/240V
AC FREQUENCY	60Hz
ENGINE	HONDA® GX390
DISPLACEMENT	389cc
VOLTAGE REGULATION	Automatic
START	Recoil/E-Start
FUEL CAPACITY	6.1 gal Gasoline
TIRE/WHEEL	9" Never-flat
DIMENSIONS	31.1" x 21.6" x 23.8"
WEIGHT	191.8 lb



MODEL NUMBER	SPG7593E*
PART NUMBER	70007
STARTING WATTS	9375
RUNNING WATTS	7500
AC VOLTAGE	120/240V
AC FREQUENCY	60 Hz
ENGINE	SIMPSON® OHV
DISPLACEMENT	420cc
VOLTAGE REGULATION	Automatic
START	Recoil/E-Start
FUEL CAPACITY	6.1 gal Gasoline
TIRE/WHEEL	9" Never-flat
DIMENSIONS	31.1" x 21.6" x 23.8"
WEIGHT	209.4 lb



MODEL NUMBER	SPG8310E*
PART NUMBER	70008
STARTING WATTS	10000
RUNNING WATTS	8300
AC VOLTAGE	120/240V
AC FREQUENCY	60 Hz
ENGINE	SIMPSON® OHV
DISPLACEMENT	439cc
VOLTAGE REGULATION	Automatic
START	Recoil/E-Start
FUEL CAPACITY	6.1 gal Gasoline
TIRE/WHEEL	9" Never-flat
DIMENSIONS	31.1" x 21.6" x 23.8"
WEIGHT	220 lb

*Battery not included. Uses 12V-14AH battery

POWERED by **SIMPSON** POWERED by **HONDA**

DISCOVER YOUR POWER


SIZING YOUR GENERATOR

- 1 Select the devices you wish to run at the same time
- 2 List any starting watts required by your devices
- 3 Add up the running watts of all of your devices
- 4 Add the HIGHEST starting watt listed to the total running watts required by your devices


DEVICE	STARTING WATTS	RUNNING WATTS	RECOMMENDED SIZE	
LIGHT BULB	N/A	100	MINIMUM AMOUNT OF STARTING WATTS NEEDED ON YOUR GENERATOR	
REFRIGERATOR/FREEZER	2200	700		
CELL PHONE CHARGER	N/A	25		
TOTAL	2200	825		3025

GENERATOR PANEL CONFIGURATIONS*:


SPG3600

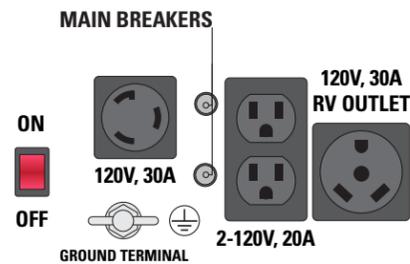


SPG7083E

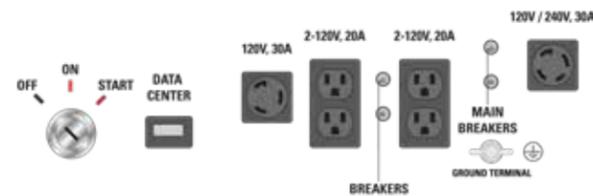


SPG3645

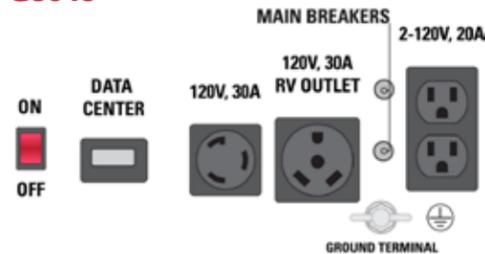


SPG7593E

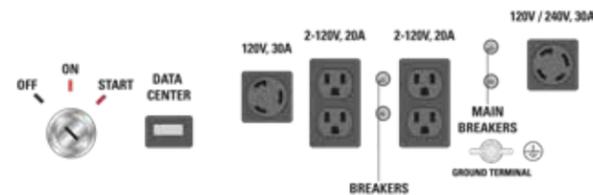

SPG5568

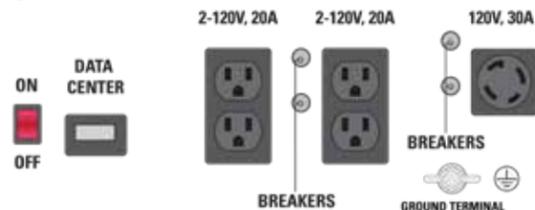

SPG8310E

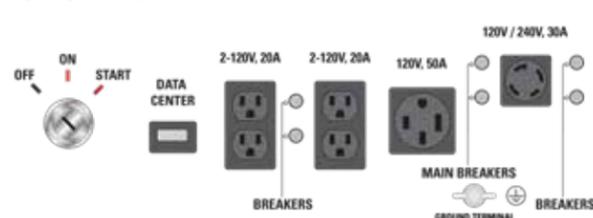

*Generator panel configurations may vary from the above layout depending on the model

PREMIUM GENERATORS

INDUSTRIAL SERIES

LIMITED WARRANTY **3YR** WARRANTY



BUILT IN LIFT POINT

Equipped with a strong steel lifting point for quick crane lifting and easy job site transfer

CSA CERTIFIED RECEPTACLES

GFCI outlets standard on all models for use in OSHA safe work environments

WATERPROOF OUTLET COVERS

Provides safety and durable protection for all receptacles

EASY ACCESS CONTROL PANEL

Equipped with run time indicator

PREMIUM WHEELS

Provide easy maneuverability across various types of terrain

HEAVY-DUTY WELDED STEEL FRAME WITH POWDER COATED FINISH

Provides durability and corrosion resistance. Also features a fold-down handle for easy storage


PREMIUM HONDA® ENGINES
Equipped with low oil shutdown to protect engine and extend product life

MODEL NUMBER	SCGH5500	SCGH8500	SCGH8500E*	SCGH13000E*	SCGH15000E*
PART NUMBER	70053	70054	70055	70056	70057
STARTING WATTS	5500	8500	8500	13000	15000
RUNNING WATTS	4500	7000	7000	10500	13500
AC VOLTAGE	120V/240V	120V/240V	120V/240V	120V/240V	120V/240V
AC FREQUENCY	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
ENGINE	HONDA® GX270	HONDA® GX390	HONDA® GX390	HONDA® GX630	HONDA® GX690
DISPLACEMENT	270cc	389cc	389cc	688cc	688cc
VOLTAGE REGULATION	Automatic	Automatic	Automatic	Automatic	Automatic
START	Recoil	Recoil	Recoil/ E-Start	E-Start	E-Start
FUEL CAPACITY	7.9 gal	7.9 gal	7.9 gal	7.9 gal	7.9 gal
TIRE/WHEEL	9" Never-flat	9" Never-flat	9" Never-flat	9" Never-flat	9" Never-flat


Please contact a Sales Representative for more details
See page 41 for information

*Battery not included. Requires 12V-14AH battery

SCGH5500



SCGH8500




SCGH8500E



SCGH13000E



SCGH15000E



DEVICE WATTAGES

HEATING & COOLING

DEVICE	STARTING WATTS	RUNNING WATTS
10,000 BTU CENTRAL AC ¹	3000	1500
24,000 BTU CENTRAL AC ¹	4950	3800
1/2 HP FURNACE FAN BLOWER ¹	2300	875
1/3 HP FURNACE FAN BLOWER ¹	1400	700
HEAT PUMP	4500	4700
13 GAL HUMIDIFIER	-	175
SPACE HEATER	-	1800
10,000 BTU WINDOW AC	1800	1200
12,000 BTU WINDOW AC	3950	3250

RESIDENTIAL

DEVICE	STARTING WATTS	RUNNING WATTS
COFFEE MAKER	-	1500
COMPUTER	-	800
ELECTRIC DRYER	1800	5750
ELECTRIC RANGE	-	2100
ELECTRIC WATER HEATER	1000	2000
1/2 HP GARAGE DOOR OPENER	2350	875
1250 WATT HAIR DRYER	-	1250
100 WATT LIGHT BULB	-	100
1000 WATT MICROWAVE	-	1000
REFRIGERATOR/ FREEZER	2200	700
SECURITY SYSTEM	-	500
1/2 HP SUMP PUMP	2150	1050
1/3 HP SUMP PUMP	1300	800
27" TELEVISION	-	500
TOASTER	-	1200
WASHING MACHINE	2300	1150
1/2 HP WELL PUMP	2100	1000
1/3 HP WELL PUMP	1400	750

¹Wattages listed are approximated, always check appliances for actual figures

RECREATIONAL

DEVICE	STARTING WATTS	RUNNING WATTS
AM/ FM RADIO	-	100
BLENDER	450	400
20" BOX FAN	-	200
CD/ DVD PLAYER	-	100
CELLPHONE BATTERY CHARGER	-	25
13" COLOR TV	-	150
ELECTRIC GRILL	-	1650
INFLATER PUMP	150	50
OUTDOOR LIGHT STRING	-	250
13,500 BTU RV AC	700	1500
SLOW COOKER	-	250

LANDSCAPING

DEVICE	STARTING WATTS	RUNNING WATTS
ELECTRIC HEDGE TRIMMER	-	400
ELECTRIC LAWN MOWER	-	1200
9" ELECTRIC LINE TRIMMER	-	350
ELECTRIC HEDGER	-	960
1/2 HP 12" ELEC. CHAIN SAW	-	900

WORK SITE

DEVICE	STARTING WATTS	RUNNING WATTS
1HP AIR COMPRESSOR	4500	1600
1/2 HP AIR COMPRESSOR	2000	1000
1/3 HP AIRLESS PAINT SPRAYER	1200	600
3" BELT SANDER	2400	1200
8" BENCH GRINDER	1100	1400
7-1/4" CIRCULAR SAW	2300	1400
1/2" HAND DRILL	900	600
3/8" HAND DRILL	600	400
10" MITER SAW	1800	1800
QUARTZ HALOGEN WORK LAMP	-	1000
RECIPROCATING SAW	-	960
TABLE SAW	2000	2000

AMP UP WITH PORTABLE POWER



For specification information on all SIMPSON® generators, refer to pages 21-28

INVERTER GENERATOR AND PARALLEL BOX ACCESSORY

LIMITED
WARRANTY **3YR** **90 DAY**
WARRANTY ACCESSORY



INVERTER GENERATOR

MODEL NUMBER	SIG2218
PART NUMBER	70011
STARTING WATTS	2200
RUNNING WATTS	1800
AC VOLTAGE	120V
AC FREQUENCY	60 Hz
AMPS	15
ENGINE	SIMPSON®
VOLTAGE REGULATION	Automatic
START	Recoil
FUEL CAPACITY	1.32 gal Gasoline
RUN TIME	8 Hour ¹





PARALLEL BOX ACCESSORY

MODEL NUMBER	SIG22PK
PART NUMBER	80442
AMPS	30

The SIG22PK parallel box includes two sets of power leads and grounding wires for easy connection between two inverter generators rated up to 3300 running watts.

¹Run time with unit at 50% load
* Inverter generator and parallel box sold separately
* Unit is 50 State EPA/CARB compliant

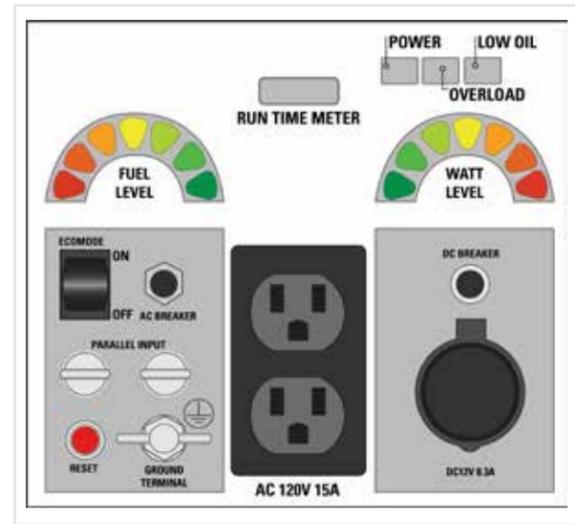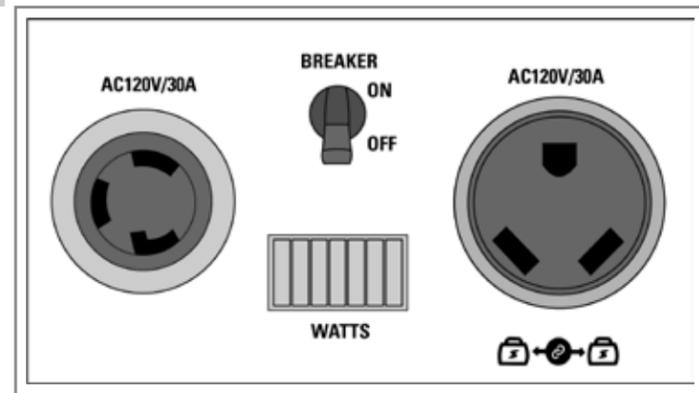

ACCURATE

Data center provides real time readings on fuel/wattage levels and run time.

QUIET

Power is quietly delivered in comparison to standard generator noise levels.


VERSATILE

Pair two inverter generators through a parallel box for twice the power when you need it.



HIGH-PERFORMANCE HOSES

Made in the USA* with high-quality foreign and domestic components, our hoses handle both hot and cold water applications while providing the flexibility and durability needed to survive the toughest job sites.

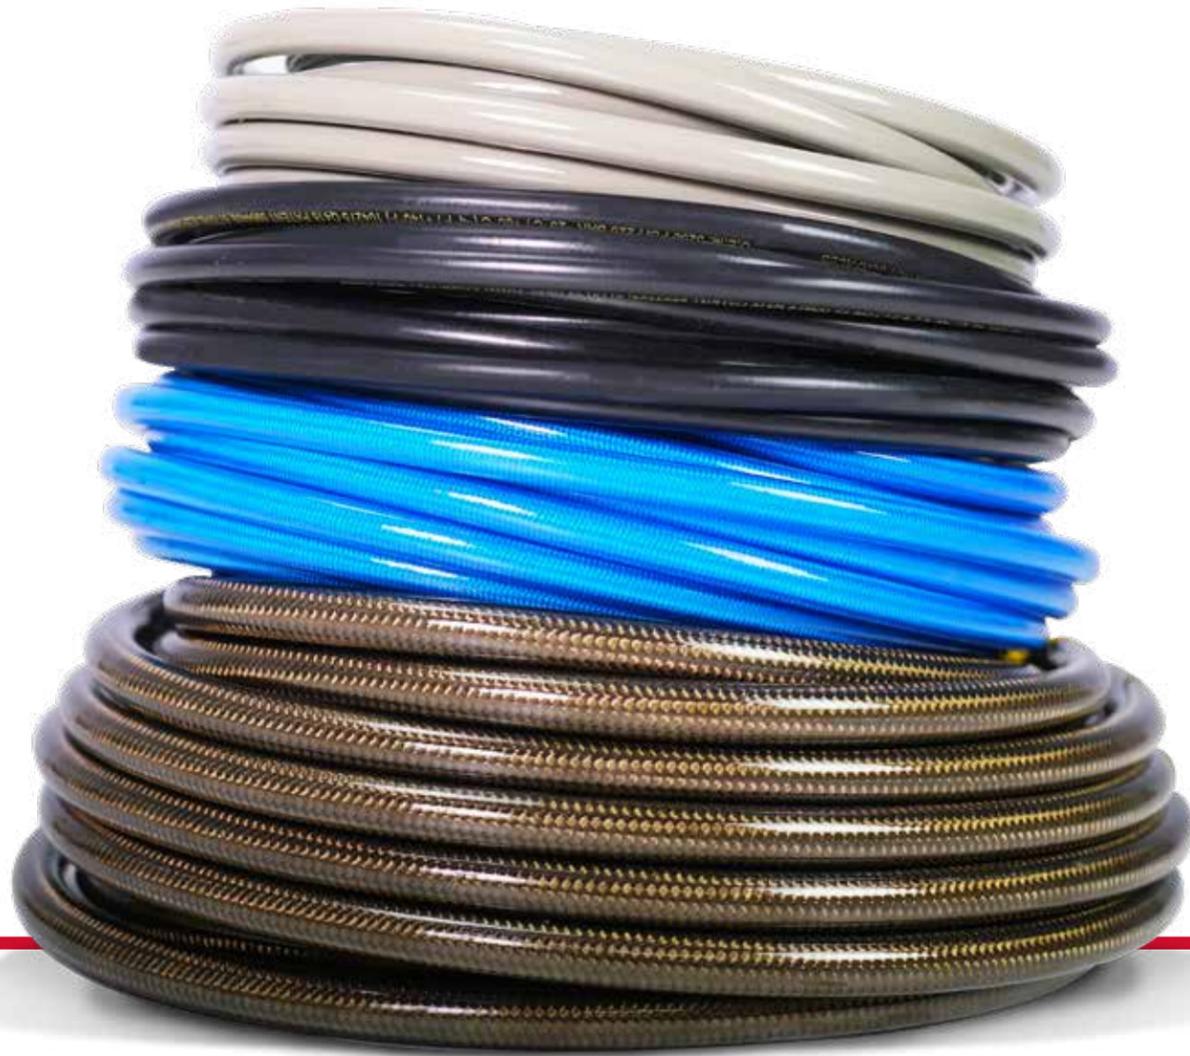

"This hose is awesome. It is very flexible, so you do not have to fight with stiffness or worry about any scuff marks showing on your sidewalks or patio. I highly recommend for a replacement hose or extension!"
Kels, Chicago, IL - MorFlex 40224



Check out more of our product reviews at SIMPSONCLEANING.COM



COLD WATER HOSES

LIMITED WARRANTY

MORFLEX® HOSE SERIES

SIMPSON's MorFlex technology is used for high flexibility and kink resistance. It has a lightweight polyester braid for easy handling and a polyurethane outer jacket that is non-marring and abrasion-resistant. MorFlex hoses are equipped with threaded M22 connections with a dual o-ring design to fit most gas and electric pressure washers with standard M22 connections.



PART NUMBER	40224 (41107)	40225 (41108)	40226 (41109)
MAX PRESSURE	3300 PSI	3700 PSI	3700 PSI
ID x LENGTH	1/4" x 25'	5/16" x 25'	5/16" x 50'
MAX TEMP	140° F	140° F	140° F
INNER MATERIAL	Polyester	Polyester	Polyester
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
ADAPTER	M22 x M22 MNPT	M22 x M22 MNPT	M22 x M22 MNPT
TERMINATED	M22 FNPT x M22 FNPT	M22 FNPT x M22 FNPT	M22 FNPT x M22 FNPT

SANTOPRENE™ HOSE

SIMPSON's Santoprene cold water hose delivers extended hose life. This polyester and steel-braided, abrasion resistant hose is designed to fit most gas and electric pressure washers with standard M22 connections.



PART NUMBER	41182
MAX PRESSURE	4000 PSI
ID x LENGTH	1/4" x 25'
MAX TEMP	140° F
INNER MATERIAL	Polyester & Steel-braided
OUTER MATERIAL	Santoprene w/ 4" Bend Protectors
ADAPTER	M22 x M22 MNPT
TERMINATED	M22 FNPT x M22 FNPT



INCLUDES M22 ADAPTER
 USED TO CONNECT MULTIPLE HOSES WITH STANDARD M22 CONNECTIONS

STEEL-BRAIDED MONSTER HOSE SERIES

SIMPSON's Monster hose series is designed using dual-braided construction of steel over polyester for high durability. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



PART NUMBER	41113	41028 (41071)	41030
MAX PRESSURE	4500 PSI	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 25'	3/8" x 50'	3/8" x 100'
MAX TEMP	140° F	140° F	140° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
QC FITTINGS	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug
TERMINATED	Solid MNPT x Solid MNPT	Solid QC Socket & Plug	Solid MNPT x Swivel MNPT

PART NUMBER	41032	41034
MAX PRESSURE	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 150'	3/8" x 200'
MAX TEMP	140° F	140° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 6" Bend Protectors
QC FITTINGS	QC Socket & Plug	QC Socket & Plug
TERMINATED	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

HOT WATER HOSES

LIMITED
WARRANTY **90 DAY**
ACCESSORY

ARMOR HOSE™ SERIES

The Armor hot water hose is built for high temperature applications up to 250°F and is designed with dual-braided construction of steel over polyester. The translucent polyurethane outer jacket is non-marring, abrasion resistant, and designed to fit most gas pressure washers with standard quick connect fittings. Its one wipe clean, anti-microbial feature makes it ideal to be used in most any environment.



PART NUMBER	41114 (41095)	41096	41115
MAX PRESSURE	4500 PSI	4500 PSI	4500 PSI
ID x LENGTH	3/8" x 50'	3/8" x 100'	3/8" x 200'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester & Steel-braided	Polyester & Steel-braided	Polyester & Steel-braided
OUTER MATERIAL	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors	Polyurethane w/ 4" Bend Protectors
QC FITTINGS	QC Socket & Plug	QC Socket & Plug	QC Socket & Plug
TERMINATED	Solid MNPT x Swivel FNPT	Solid MNPT x Swivel FNPT	Solid MNPT x Swivel FNPT

WRAPPED RUBBER HOSE SERIES

SIMPSON's wrapped rubber hose series features dual-braided construction of steel over polyester and is jacketed with wrapped rubber for high strength, durability and kink resistance. These hoses provide exceptional performance in high temperature applications up to 250°F and pressure ratings from 4,500 to 10,000 PSI.



PART NUMBER	41183	41184	41185
MAX PRESSURE	4500 PSI	8000 PSI	8000 PSI
ID x LENGTH	3/8" x 50'	3/8" x 50'	3/8" x 100'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	R1 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 6" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
QC FITTINGS	Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
TERMINATED	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

PART NUMBER	41186	41187	41188	41189
MAX PRESSURE	8000 PSI	10,000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH	3/8" x 200'	3/8" x 50'	3/8" x 100'	3/8" x 200'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 24" Bend Protectors			
QC FITTINGS	Stainless Steel QC w/ Plug			
TERMINATED	Solid MNPT x Swivel MNPT			

PART NUMBER	41190	41191	41192
MAX PRESSURE	10,000 PSI	10,000 PSI	10,000 PSI
ID x LENGTH	1/2" x 50'	1/2" x 100'	1/2" x 200'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	R2 Steel-braided	R2 Steel-braided	R2 Steel-braided
OUTER MATERIAL	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors	Wrapped Rubber w/ 24" Bend Protectors
QC FITTINGS	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug	Stainless Steel QC w/ Plug
TERMINATED	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT	Solid MNPT x Swivel MNPT

(Comes in retail packaging)

HOT WATER HOSES (CONT.)

LIMITED
WARRANTY **90 DAY**
ACCESSORY

JETXTREME™ JETTER HOSE SERIES

SIMPSON's Jetxtreme hose series is packed with performance for the toughest of jobs. This hose is constructed with a polyester braided inner tube and a polyurethane, anti-microbial outer jacket that provides added strength and durability. It's one wipe clean feature allows for quick clean up and storage from your jobsite. Designed to handle your hot water jetting needs up to 250°F, the Jetxtreme hose series offers a wide range of PSI performances.



PART NUMBER	30120	30121
MAX PRESSURE	4000 PSI	4000 PSI
ID x LENGTH	3/8" x 50'	3/8" x 75'
MAX TEMP	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30122	30123	30124	30125'
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	3/8" x 100'	3/8" x 150'	3/8" x 200'	3/8" x 300'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT			

PART NUMBER	30170	30171	30172	30173
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 25'	1/4" x 50'	1/4" x 100'	1/4" x 150'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT			

PART NUMBER	30174	30175	30176	30200
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	4000 PSI
ID x LENGTH	1/4" x 200'	1/4" x 250'	1/4" x 300'	1/2" x 50'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT			

HOT WATER HOSES (CONT.)

LIMITED
WARRANTY



JETXTREME™ JETTER HOSE SERIES- CONTINUED



PART NUMBER	30201	30202	30203
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	1/2" x 75'	1/2" x 100'	1/2" x 150'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30204	30205	30206
MAX PRESSURE	4000 PSI	4000 PSI	4000 PSI
ID x LENGTH	1/2" x 200'	1/2" x 5'	1/2" x 400'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

CARPET HOSE SERIES

SIMPSON's carpet cleaning solution hoses are ideal for many commercial cleaning applications. These solution hoses are built with a non-marring bonded jacket and a seamless heat resistant inner tube. Also included are 4-inch bend protectors to prevent harmful twists and breaks during cleaning. This heavy duty hose is flexible, lightweight, and is rated up to 3000 PSI.



PART NUMBER	30110	30111	30113
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8" x 25'	3/8" x 50'	3/8" x 100'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30114	30115	30116	30117
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8" x 150'	3/8" x 200'	1/4" x 250'	1/4" x 300'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30118	30119	30140	30141
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	3/8" x 40'	3/8" x 24"	1/4" x 25'	1/4" x 50'
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

HOT WATER HOSES (CONT.)

LIMITED
WARRANTY



CARPET HOSE SERIES- CONTINUED



PART NUMBER	30142	30143	30144
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 100'	1/4" x 150'	1/4" x 200'
MAX TEMP	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane
TERMINATED	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT	SS Solid MNPT x SS Solid MNPT

PART NUMBER	30145	30146	30155	30156
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 250'	1/4" x 300'	1/4" x 12"	1/4" x 15"
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	SS Solid MNPT x SS Solid MNPT			


PART NUMBER	30157	30158	30159	30160
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 18"	3/8" x 12"	3/8" x 15"	3/8" x 18"
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	SS Solid MNPT x SS Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT	Solid MNPT x Solid MNPT

PART NUMBER	30161	30177	30178	30179
MAX PRESSURE	3000 PSI	3000 PSI	3000 PSI	3000 PSI
ID x LENGTH	1/4" x 13"	1/4" x 12"	1/4" x 15"	1/4" x 18"
MAX TEMP	250° F	250° F	250° F	250° F
INNER MATERIAL	Polyester braided	Polyester braided	Polyester braided	Polyester braided
OUTER MATERIAL	Polyurethane	Polyurethane	Polyurethane	Polyurethane
TERMINATED	SS Solid MNPT x SS Solid MNPT			

PART NUMBER	30207
MAX PRESSURE	3000 PSI
ID x LENGTH	1/4" x 75'
MAX TEMP	250° F
INNER MATERIAL	Polyester braided
OUTER MATERIAL	Polyurethane
TERMINATED	SS Solid MNPT x SS Solid MNPT

PREMIUM ACCESSORIES

SIMPSON offers a wide variety of premium pressure washer accessories to enhance your cleaning experience. Many accessories are designed to fit most pressure washers, providing more cleaning options for the homeowner and professional to keep you cleaning effectively and efficiently.

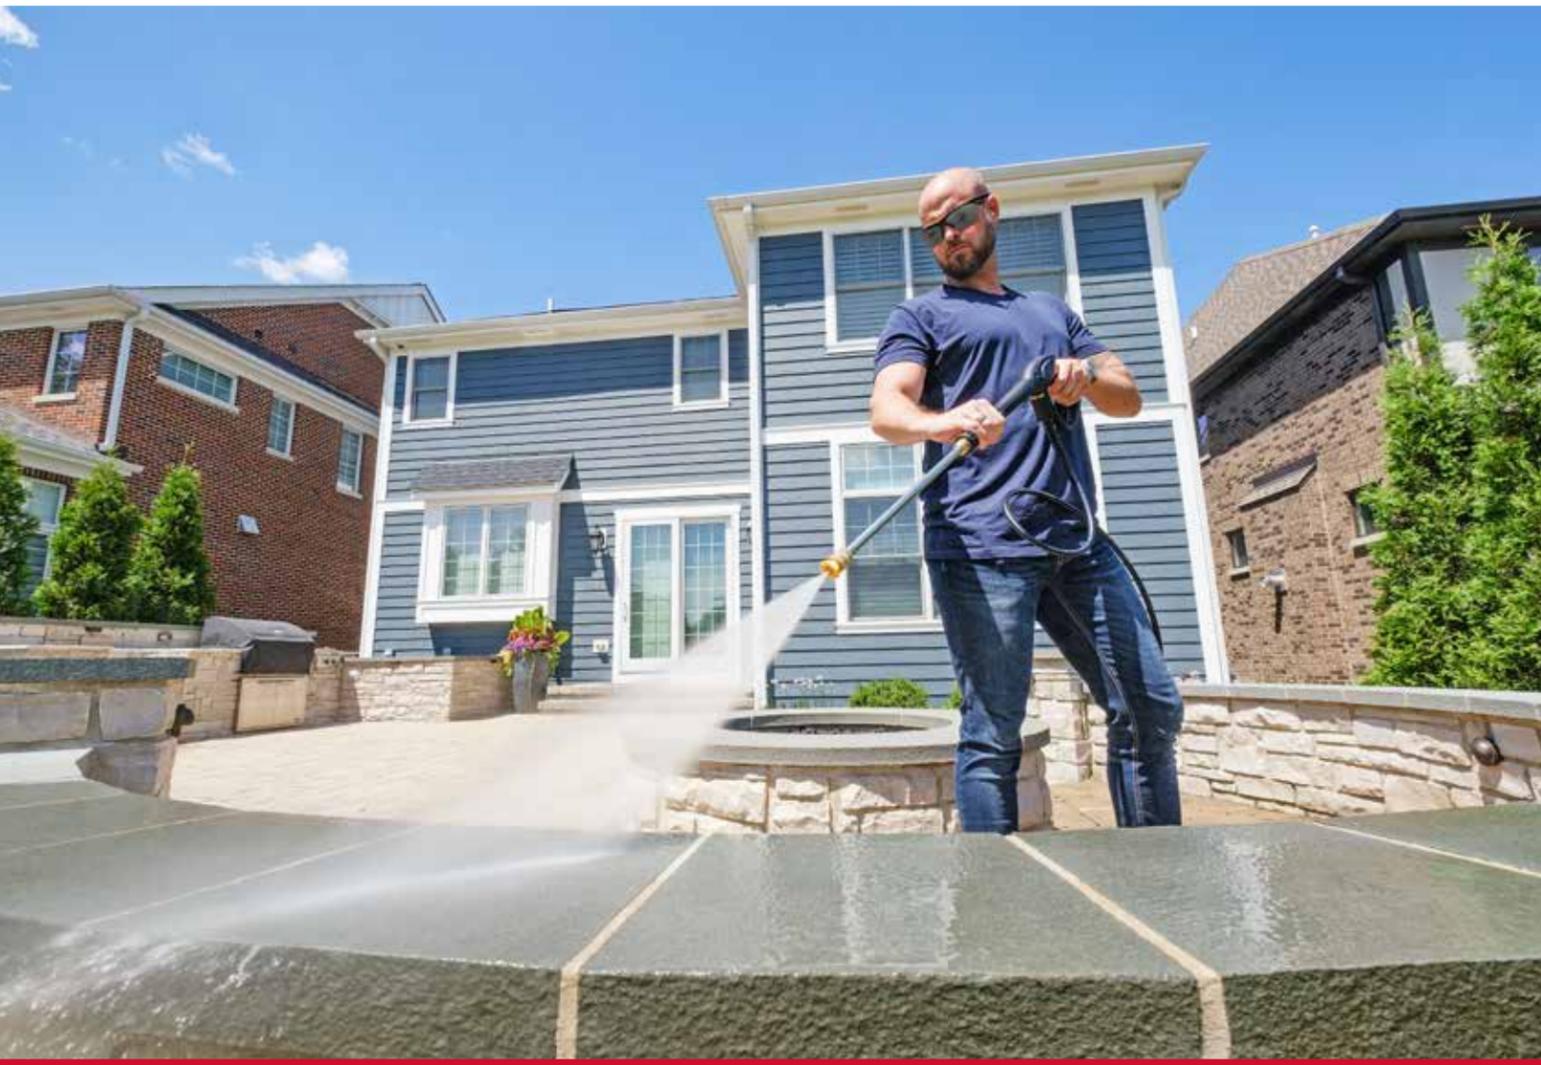

PREMIUM ACCESSORIES

LIMITED WARRANTY 

GUNS & LANCES

FRONT LOAD SPRAY GUN

PART NUMBER	80147
MAX PRESSURE	3400 PSI
MAX GPM	8.0 GPM
MAX TEMP	140° F
INLET - HOSE CONNECT	M22 Male
OUTLET - LANCE CONNECT	M22 Female



360° SWIVEL SIDE ASSIST SPRAY GUN

PART NUMBER	80148
MAX PRESSURE	4500 PSI
MAX GPM	6.6 GPM
MAX TEMP	140° F
INLET - HOSE CONNECT	M22 Male w/ 3/8" Female QC plug adapter
OUTLET - LANCE CONNECT	M22 Female



HOT WATER SPRAY GUN

PART NUMBER	80178
MAX PRESSURE	5075 PSI
MAX GPM	12.0 GPM
MAX TEMP	212° F
INLET - HOSE CONNECT	3/8" FNPT with adapters*
OUTLET - LANCE CONNECT	1/4" FNPT



***INCLUDES BONUS ADAPTERS**
QTY 1: 3/8" MNPT x M22 Male
QTY 1: 3/8" MNPT x QC Plug

DIAL-N-WASH® ADJUSTABLE PRESSURE REGULATOR

PART NUMBER	82232
MAX PRESSURE	4500 PSI
MAX GPM	4.0 GPM
MAX TEMP	140° F
INLET - LANCE CONNECT	M22 Female
OUTLET - GUN CONNECT	M22 Male



16" SPRAY LANCE

PART NUMBER	80149
MAX PRESSURE	3600 PSI
MAX GPM	N/A
MAX TEMP	140° F
INLET - GUN CONNECT	M22 Male
OUTLET - NOZZLE CONNECT	1/4" QC Coupler



31" SPRAY LANCE

PART NUMBER	80479
MAX PRESSURE	4500 PSI
MAX GPM	N/A
MAX TEMP	140° F
INLET - GUN CONNECT	M22 Male
OUTLET - NOZZLE CONNECT	1/4" QC Coupler



48" INSULATED LANCE

PART NUMBER	80179
MAX PRESSURE	5000 PSI
MAX GPM	N/A
MAX TEMP	212° F
INLET - GUN CONNECT	1/4" MNPT
OUTLET - NOZZLE CONNECT	1/4" QC Coupler



O-RING & FILTER KIT



PART NUMBER	80151
TWO FILTERS	One Size
TWO O-RING SETS	Five Sizes

NOZZLES

SET OF 5 SPRAY NOZZLES: 0°, 15°, 25°, 40° AND SOAP

PART NUMBER	80145	80146
MAX PRESSURE	3600 PSI	4500 PSI
MAX TEMP	212° F	212° F
NOZZLE SIZE	3.0, SOAP	4.0, SOAP
LANCE CONNECT	1/4" QC Plug	1/4" QC Plug



SET OF 2 SECOND STORY NOZZLES: WASH AND SOAP

PART NUMBER	80177
MAX PRESSURE	5000 PSI
MAX TEMP	212° F
NOZZLE SIZE	10.0, 40.0
LANCE CONNECT	1/4" QC Plug



5-N-1 SPRAY NOZZLE: 0°, 15°, 25°, 40° AND SOAP

PART NUMBER	80142
MAX PRESSURE	3600 PSI
MAX TEMP	140° F
NOZZLE SIZE	2.8 - 3.2, SOAP
LANCE CONNECT	1/4" QC Plug



DID YOU KNOW?

- You should always replace any worn or broken nozzles as they can potentially be a safety hazard.
- You should always use accessories that are within your pressure washer's PSI range. Always refer to your product user manual for additional details.



PREMIUM ACCESSORIES (CONT.)

LIMITED WARRANTY



OSCILLATING TURBO NOZZLES



PART NUMBER	80143	80144	80355
MAX PRESSURE	3600	4500	5500
MAX TEMP	212° F	212° F	212° F
NOZZLE SIZE	3.0	4.0	5.0
LANCE CONNECT	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug



PART NUMBER	80356	80357	80358
MAX PRESSURE	5500	5500	5500
MAX TEMP	212° F	212° F	212° F
NOZZLE SIZE	6.0	7.0	8.0
LANCE CONNECT	1/4" QC Plug	1/4" QC Plug	1/4" QC Plug

HOSE REELS



HOSE REELS

PART NUMBER	80399	80403
MAX PRESSURE	5000 PSI	5000 PSI
MAX TEMP	212° F	212° F
HOSE CAPACITY	100' x 3/8"	200' x 3/8"
MATERIAL	Heavy-duty Steel Construction	Heavy-duty Steel Construction



PORTABLE HOSE REELS

PART NUMBER	80401
MAX PRESSURE	5000 PSI
MAX TEMP	212° F
HOSE CAPACITY	100' x 3/8" or 125' x 1/4"
MATERIAL	Heavy-duty Steel Construction

SURFACE CLEANERS

15" SURFACE CLEANER



PART NUMBER	80165
MAX PRESSURE	3700 PSI
MAX TEMP	140° F
LANCE CONNECT	1/4" Plug
MATERIAL	Powder Coated Steel Construction

20" COMMERCIAL SURFACE CLEANER




PART NUMBER	80182
MAX PRESSURE	4500 PSI
MAX TEMP	212° F
LANCE CONNECT	3/8" Plug
MATERIAL	Heavy-duty ABS
FILTER	High Pressure Inlet

POWER BOOST[®]

ADVANCED PUMP TECHNOLOGY

With PowerBoost[®] technology, high water pressure levels trigger a bypass around the venturi nozzle, where chemical suction takes place, reducing pressure loss. Pumps with PowerBoost deliver higher pressure at the nozzle for improved impact and cleaning performance.

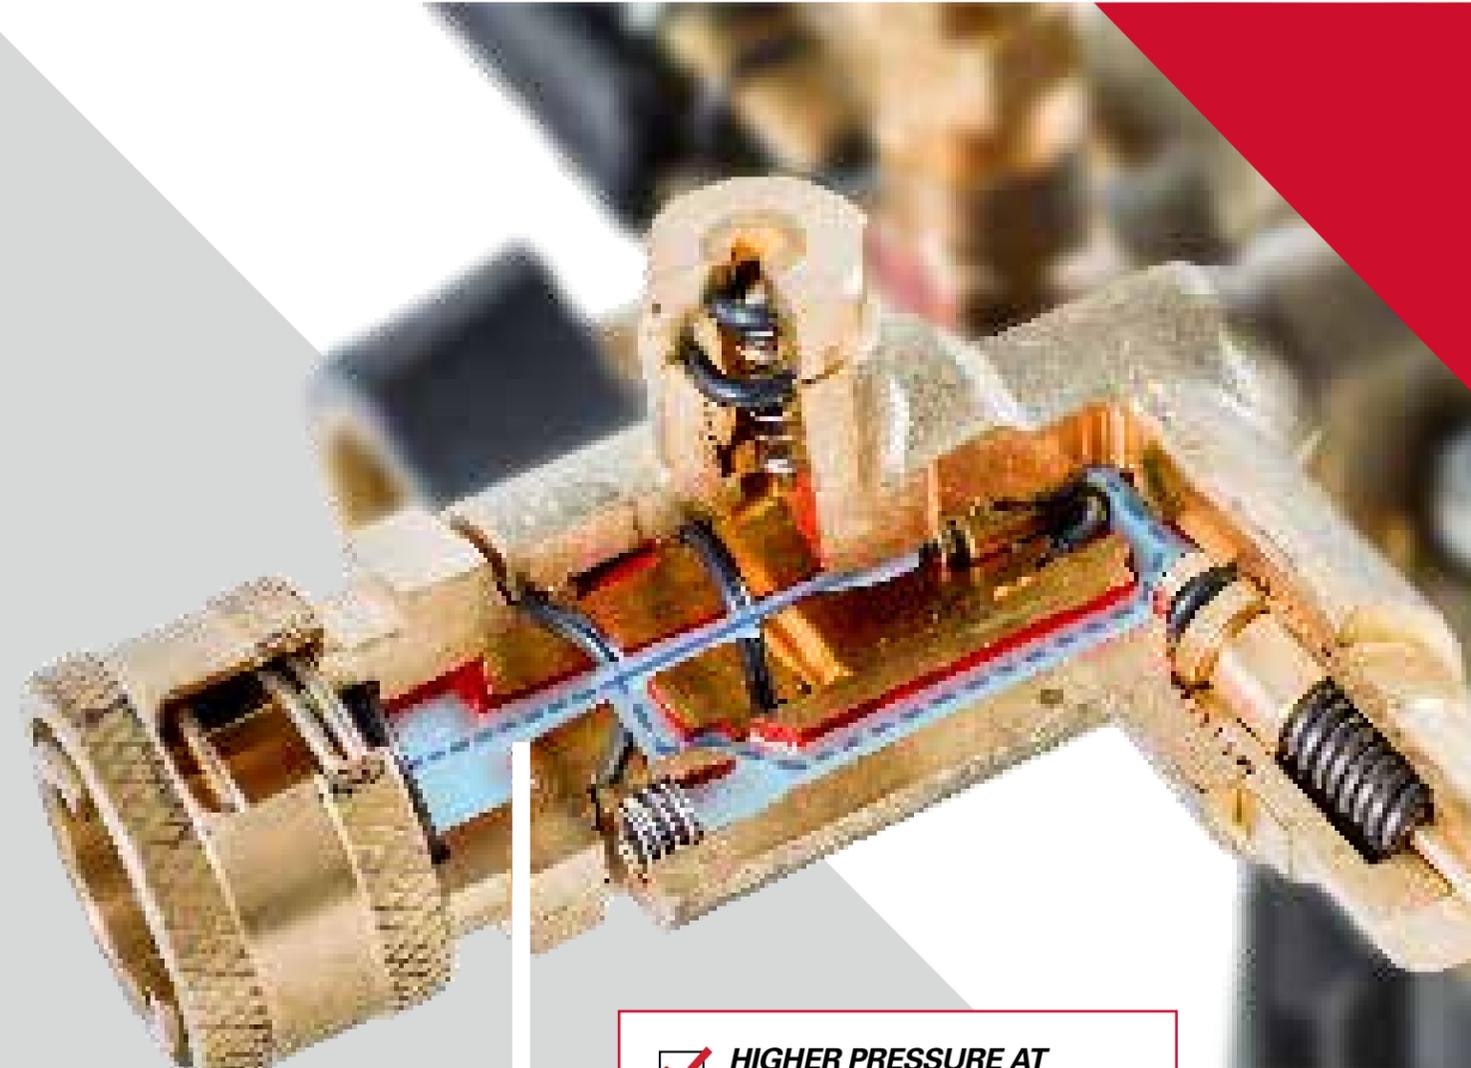

- ✓ HIGHER PRESSURE AT THE NOZZLE
- ✓ GREATER IMPACT AND CLEANING PERFORMANCE

OEM TECHNOLOGIES™ AXIAL CAM PUMP KITS

VERTICAL



PART NUMBER	90025	90026
MAX PRESSURE	2400 PSI	3000 PSI
MAX GPM	2.0 GPM	2.4 GPM
MANIFOLD	Clear Anodized Aluminum Manifold	Clear Anodized Aluminum Manifold
UNLOADER	Integrated w/ Easy Start Unloader	Integrated w/ Easy Start Unloader
SHAFT SIZE	7/8" Shaft	7/8" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet	Garden Hose Inlet/ M22 Outlet



PART NUMBER	90027
MAX PRESSURE	3200 PSI
MAX GPM	2.5 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated w/ Easy Start Unloader
SHAFT SIZE	7/8" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet

LIMITED WARRANTY



AAA™ TRIPLEX PUMP KITS



PART NUMBER	90049
MAX PRESSURE	3400 PSI
MAX GPM	2.5 GPM
MANIFOLD	Aluminum Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet



PART NUMBER	90036
MAX PRESSURE	3200 PSI
MAX GPM	2.8 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet



PART NUMBER	90037
MAX PRESSURE	3700 PSI
MAX GPM	2.5 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet

LIMITED WARRANTY



- All Pump Kits come fully plumbed. Includes:**
- Pump
 - Mounting hardware (Nuts & Bolts)
 - Siphon hose with filter
 - Shaft key
 - Instruction booklet

HORIZONTAL



PART NUMBER	90028
MAX PRESSURE	3200 PSI
MAX GPM	2.5 GPM
MANIFOLD	Clear Anodized Aluminum Manifold
UNLOADER	Integrated w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet



PART NUMBER	90029
MAX PRESSURE	3400 PSI
MAX GPM	2.5 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet

LIMITED WARRANTY



C42 POWER BOOST

PART NUMBER	90038	90039	90034
MAX PRESSURE	3800 PSI	4000 PSI	4400 PSI
MAX GPM	3.5 GPM	3.5 GPM	4.0 GPM
MANIFOLD	Brass Manifold	Brass Manifold	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader	Integrated & Adjustable w/ Easy Start Unloader	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	1" Shaft	1" Shaft	1" Shaft
THREADING	Garden Hose Inlet/ QC Outlet	Garden Hose Inlet/ QC Outlet	Garden Hose Inlet/ QC Outlet



C32X

PART NUMBER	90058	90057	90056
MAX PRESSURE	3000 PSI	3500 PSI	4400 PSI
MAX GPM	3.0 GPM	4.0 GPM	4.0 GPM
MANIFOLD	Brass Manifold	Brass Manifold	Brass Manifold
UNLOADER	Remote Unloader with Bypass hose	Remote Unloader with Bypass hose	Remote Unloader with Bypass hose
SHAFT SIZE	1" Shaft	1" Shaft	1" Shaft
THREADING	Garden Hose Inlet/ QC Outlet	Garden Hose Inlet/ QC Outlet	Garden Hose Inlet/ QC Outlet



AAA™ AX300 PRO AXIAL PUMP KIT



LIMITED WARRANTY



PART NUMBER	90052
MAX PRESSURE	3500 PSI
MAX GPM	2.5 GPM
MANIFOLD	Brass Manifold
UNLOADER	Integrated & Adjustable w/ Easy Start Unloader
SHAFT SIZE	3/4" Shaft
THREADING	Garden Hose Inlet/ M22 Outlet



PUMP GUARD
80130
12 oz



15W40 PUMP OIL
80138
16 oz

PUMP CARE

POWER BOOST - Indicates pump equipped with PowerBoost® see page 38 for details.

AAA™ PUMP UNLOADERS

LIMITED WARRANTY



UNLOADER

PART NUMBER	80362	80361	80404
MAX PRESSURE	3600 MAX PSI	4500 MAX PSI	5500 MAX PSI
MAX GPM	12 MAX GPM	12 MAX GPM	12 MAX GPM
MATERIAL	Brass Construction	Brass Construction	Brass Construction
THREADING	3/8" FNPT Inlet/Outlet	3/8" FNPT Inlet/Outlet	3/8" FNTP Inlet/Outlet
MAX TEMP	212°F Max Temp	212°F Max Temp	212°F Max Temp



PART NUMBER	80405
MAX PRESSURE	6500 MAX PSI
MAX GPM	12 MAX GPM
MATERIAL	Stainless Steel
THREADING	3/8" FNTP Inlet/Outlet
MAX TEMP	212°F Max Temp

BANJO UNLOADER

PART NUMBER	80364	80363
MAX PRESSURE	3600 MAX PSI	4500 MAX PSI
MAX GPM	12 MAX GPM	12 MAX GPM
MATERIAL	Brass Construction	Brass Construction
THREADING	3/8" FNPT Inlet/Outlet	3/8" FNPT Inlet/Outlet
MAX TEMP	212°F Max Temp	212°F Max Temp



POWER BOOST - Indicates pump equipped with PowerBoost® see page 38 for details.

INTERESTED IN BECOMING A **SIMPSON® DEALER?**

Partner with a vertically integrated manufacturer of outdoor power equipment as a SIMPSON® dealer and enjoy the following benefits:

- 1** Dedicated Account Representative to help grow your **SIMPSON** business
- 2** Access to exclusive sales promotions
- 3** Invitations to exclusive **DEALER ONLY** tradeshows and events
- 4** View our full library of literature including promotional sales materials
- 5** Feel secure with a service network of over **1,250 facilities** in North America
- 6** Become your own service center and increase your business



HAVE QUESTIONS?

CONTACT YOUR SALES REPRESENTATIVE AT:
SALES@SIMPSONCLEANING.COM OR
CALL US **1-847-348-1500**

CETA CPC-100 CERTIFIED TESTING STANDARDS



Why choose a CETA Certified product?



PROFESSIONAL MEMBER BASE:

CETA has a membership base of over 200 entities from four different countries representing manufacturers, dealers, service providers, customers/end-users and associates.



TOP INDUSTRY RATINGS:

CETA only allows for products to operate within and no less than 90% of the product rating. This accounts for normal variances within the manufacturing process.



PRECISE TESTING STANDARDS:

CETA certified products are rated based on performance recorded using the **same** nozzle as opposed to utilizing skewed data from different nozzle sizes.



CERTIFIED PERFORMANCE:

The CETA standard provides the end-user with a pressure washer that is certified to perform as intended with any nozzle provided as OEM equipment.

For more information visit <https://ceta.org/cpc-100-performance-standard/>



DRIVEN BY *PERFORMANCE™*

Disclaimer of liability: In the preparation of this catalog, every effort has been made to offer the most current, correct, and clearly expressed information as possible. Nevertheless, inadvertent errors in information may occur and information may become outdated. In particular, but without limiting anything stated herein, FNA Group, Inc. disclaims any responsibility for errors and accuracy or timeliness of the information that may be contained in this catalog, also reserves the right to make changes to its product line at any time without notice. If misleading, inaccurate or otherwise inappropriate information is brought to our attention, a reasonable effort will be made to fix or remove it. Please contact us at 1-847-348-1500 with any concerns.

FC-020220-V2

LEARN MORE AT WWW.SIMPSONCLEANING.COM

CONNECT WITH US ON SOCIAL MEDIA: [SIMPSON_OPE](#)

