DSP/SSP/SP/SPH/RSP4/TSP/CS

Stud Plate Ties

This product is preferable to similar connectors because of (a) easier installation, (b) higher loads, (c) lower installed cost, or a combination of these features.

The stud plate tie series offers general solutions for connecting the stud to the top and bottom plates. All models can be used to make a connection to either the top or bottom plate, and several are suitable for double top plates and studs.


Material: DSP/SSP/SPH — 18 gauge; TSP/CS16 — 16 gauge; all others — 20 gauge

Finish: Galvanized. Some products available in ZMAX® coating. See Corrosion Information, pp. 13–15.


Installation:

- Use all specified fasteners; see General Notes
- TSP/DSP/SSP — Sill-plate installation: fill all round holes
- TSP/DSP/SSP — Top-plate installation: fill all round and triangle holes
- SP1/SP2 — One of the 10d common stud nails is driven at a 45° angle through the stud into the plate
- CS — Slide the CS16 or CS20 strap underneath the mudsill with the appropriate length of strap protruding from the inside of the mudsill. See illustration on p. 275 for more details.
  - Each bend in the strap must be tight, and the strap must sit flush against the edge of the mudsill and the stud or sheathing
  - Bend strap one time only


Codes: See p. 12 for Code Reference Key Chart

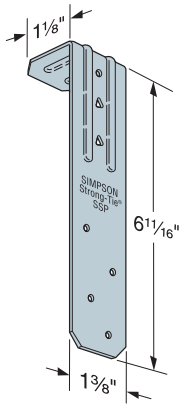


SSP
U.S. Patents 7,065,932 and 7,356,973

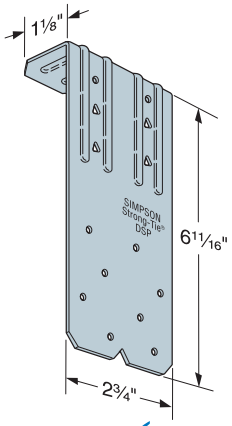


DSP
U.S. Patents 7,065,932 and 7,356,973

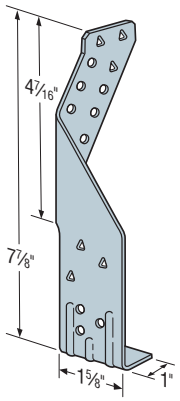


TSP
U.S. Patent D618,085

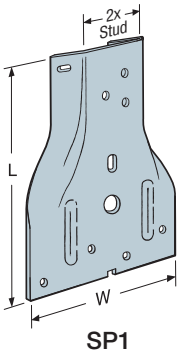


SP1




SP4




(1) Typical RSP4 Stud to Single Bottom Plate



(2) Typical RSP4 Stud to Double Top Plate *(see footnote 4)*



SP1 Nailing Profile



Typical SP2 Installation

C-C-2019 ©2019 SIMPSON STRONG-TIE COMPANY INC.

DSP/SSP/SP/SPH/RSP4/TSP/CS

Stud Plate Ties (cont.)


These products are available with additional corrosion protection. For more information, see p. 15.

SS For stainless-steel fasteners, see p. 21.


SD Many of these products are approved for installation with Strong-Drive® SD Connector screws. See pp. 335–337 for more information.

Model No.	Dimensions (in.) W	Dimensions (in.) L	Stud	Plate Width	Fasteners (in.) Stud[1]	Fasteners (in.) Plate	Allowable Uplift Loads DF/SP Side 8 (160)	Allowable Uplift Loads DF/SP Center 9 (160)	Allowable Uplift Loads SPF/HF Side 8 (160)	Allowable Uplift Loads SPF/HF Center 9 (160)	Code Ref.
SP1	3½	5⅛	2x	—	(6) 0.148 x 3	(4) 0.148 x 3	555	555	535	535	IBC, FL, LA
SP2	3½	6⅝	2x	—	(6) 0.148 x 3	(6) 0.148 x 3	1,010	1,010	605	605	
SP4	3⅜	7¼	2x	4x	(6) 0.148 x 1½	—	415	825	355	710	
SP6	5⅜	7¾	2x	6x	(6) 0.148 x 1½	—	415	825	355	710	
SP8	7⅝	8⅝	2x	8x	(6) 0.148 x 1½	—	415	825	355	710	
SPH4	3⅜	8¾	2x	4x	(10) 0.148 x 1½	—	520	1,040	450	895	
					(12) 0.148 x 1½	—	640	1,280	550	1,100	
SPH6	5⅜	9¼	2x	6x	(10) 0.148 x 1½	—	520	1,040	450	895	
					(12) 0.148 x 1½	—	640	1,280	550	1,100	
SPH8	7⅝	8⅜	2x	8x	(10) 0.148 x 1½	—	520	1,040	450	895	
					(12) 0.148 x 1½	—	640	1,280	550	1,100	
RSP4 (1)	2⅛	4½	2x	—	(4) 0.131 x 1½	(4) 0.131 x 1½	245	245	285	285	
RSP4 (2)	2⅛	4½	2x	—	(4) 0.131 x 1½	(4) 0.131 x 1½	390	390	370	370	
CS20	1¼	24	2x	—	(6) 0.148 x 1½	—	—	550	—	475	
				—	(10) 0.148 x 1½	—	—	915	—	790	
SS CS16	1¼	26	2x	—	(12) 0.148 x 1½	—	—	1,135	—	980	
				—	(14) 0.148 x 1½	—	—	1,325	—	1,140	

1. See pp. 260–261 for Straps and Ties General Notes.
2. SP1/SP2 — drive one stud nail at an angle through the stud into the plate to achieve the table load (see illustration).
3. RSP4 — see Installation details (1) and (2) for reference.
4. RSP4 — F_2 is 225 lb. for Installation 1 and 245 lb for Installation 2. F_1 load is 165 lb. for both installations.
5. Maximum load for SPH in southern yellow pine is 1,415 lb. for center loading and 710 lb. for side loading.
6. When cross-grain bending or cross-grain tension cannot be avoided in the members, mechanical reinforcement to resist such forces shall be considered by the Designer.
7. For retrofit application, use CS16 and CS20. Total length of strap is listed.
8. Use Side (eccentric) load when uplift loads are applied to only one face of the top plate.
9. Use Center (concentric) loads when uplift loads are applied at the centerline of the top plate, or where equal loads are applied to both sides of the top plate. Center loads should also be used for stud-to-bottom plate loads.
10. **Fasteners:** Nail dimensions in the table are listed diameter by length. See pp. 21–22 for fastener information.

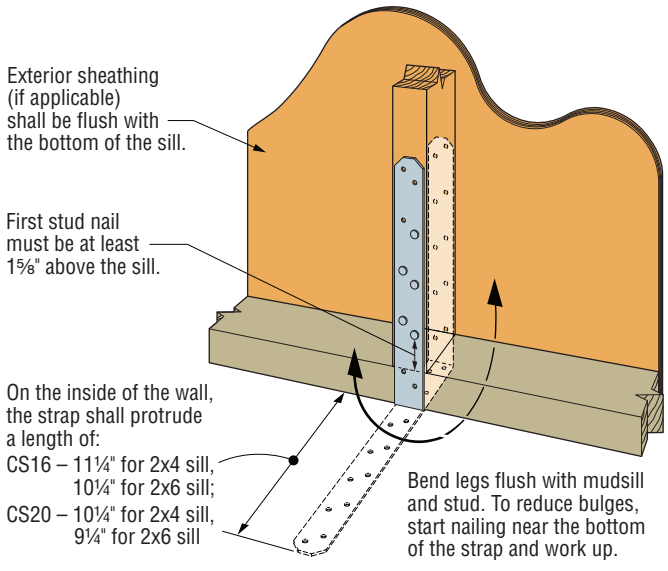

Typical CS Installation
Stud to Mudsill

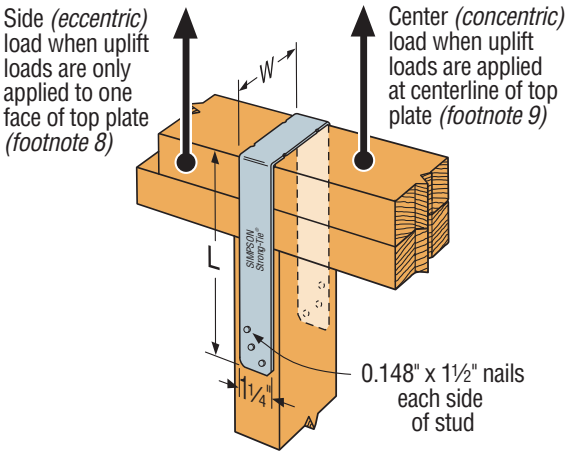

Typical SP4 Installation
(SPH similar)

C-C-2019 ©2019 SIMPSON STRONG-TIE COMPANY INC.


DSP/SSP/SP/SPH/RSP4/TSP/CS

Stud Plate Ties (cont.)


These products are available with additional corrosion protection. For more information, see p. 15.

Model No.	Dimensions (in.)		Fasteners (in.)			Allowable Uplift Loads (160)			Code Ref.
	W	L	Studs	Double Top Plate	Single Sill Plate	Double Top Plate	Single Sill Plate		
						DF/SP/SPF	DF/SP	SPF/HF	
SSP	1⅜	6¹¹⁄₁₆	(4) 0.148 x 1½	(3) 0.148 x 1½	—	330	—	—	IBC, FL, LA
				—	(1) 0.148 x 1½	—	395	310	
			(4) 0.148 x 3	(3) 0.148 x 3	—	410	—	—	
				—	(1) 0.148 x 3	—	430	400	
DSP	2¾	6¹¹⁄₁₆	(8) 0.148 x 1½	(6) 0.148 x 1½	—	730	—	—	
				—	(2) 0.148 x 1½	—	620	515	
			(8) 0.148 x 3	(6) 0.148 x 3	—	780	—	—	
				—	(2) 0.148 x 3	—	780	565	
TSP	1½	7⅞	(6) 0.148 x 1½	—	(3) 0.148 x 1½	—	465[5]	400	FL
			(9) 0.148 x 1½	(6) 0.148 x 1½	—	755[4]	—	—	
				(6) 0.148 x 3		1,015[4]			


1. See pp. 260–261 for Straps and Ties General Notes.
2. When cross-grain bending or cross-grain tension cannot be avoided in the members, mechanical reinforcement to resist such forces shall be considered by the Designer.
3. Allowable loads for DSP installed to a rim board are 620 lb. (DF/SP) and 515 lb. (SPF/HF).
4. Noted values apply only to DF/SP members. For SPF values, multiply by 0.86.
5. Southern pine allowable uplift load is 520 lb.
6. **Fasteners:** Nail dimensions in the table are listed diameter by length. See pp. 21–22 for fastener information.




Typical SSP Installed to Sill Plate
(DSP similar for double stud)



Typical TSP Installed to Top Plate



Typical DSP Installed to Top Plate
(SSP similar for single stud)

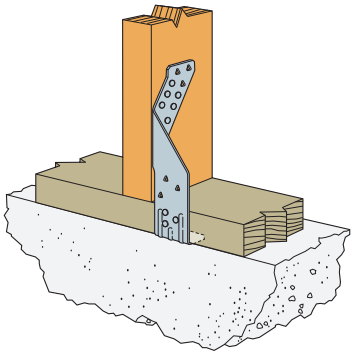

Typical TSP Installed to Sill Plate

C-C-2019 ©2019 SIMPSON STRONG-TIE COMPANY INC.