

Finesse™

Frameless Sliding Shower Door 5475-59

Features

- Frameless design highlights showering area.
- Frameless, 1/4" (6 mm) thick tempered glass.
- Center-guided mechanism for smooth, quiet sliding action and easy cleaning.
- Reversible top track offers multiple asthetic options.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Wide variety of finishes and glass patterns.
- Inside and outside towel bars complete the look of this door.

Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

Components

Additional included component/s: Hardware kit.



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
×	DR	Deep Bronze
×	N	Nickel
	PB	Vibrant® Polished Brass
	S	Silver

Available Glass Options

Code Description

Boxwood[™]
Cirkette[™]
Clear
Frosted
Grafite[™]

Lake Mist™


Lake Mist™ Oak Park™

Starscape™



Finesse™

Frameless Sliding Shower Door 5475-59

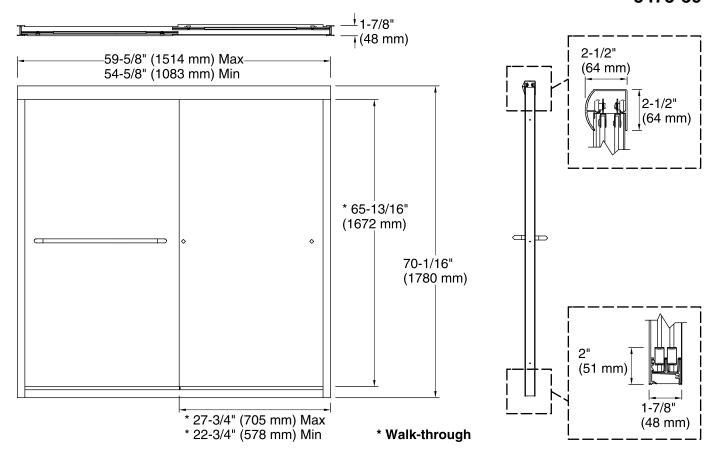

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 54-5/8" (1387 mm)
Opening Width - Max: 59-5/8" (1514 mm)
Walk-through - Min: 22-3/4" (578 mm)
Walk-through - Max: 27-3/4" (705 mm)
Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 72-1/16" (1830 mm) to allow for installation clearance.