



# Intrigue™

## Neo-Angle Shower Door

### SP2276A-38

#### Features

- Space-saving corner design.
- Framed, 1/8" (3 mm) thick tempered glass.
- Threshold conveniently directs water back into shower.
- Watertight flexible door seal for easy operation.
- Full-length handle.
- For use on Sterling Intrigue Series 7204.

#### Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

#### Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

#### Recommended Accessories

- 72041100 39" Neo-Angle Shower Base
- 72040100 39" Neo-Angle Tile Shower

#### Components

Additional included component/s: Hardware kit.



#### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

#### STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	N	Nickel
	S	Silver

#### Available Glass Options

Code	Description
------	-------------


	Ellipse
	Rain

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.




For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

8-1-2018 09:31

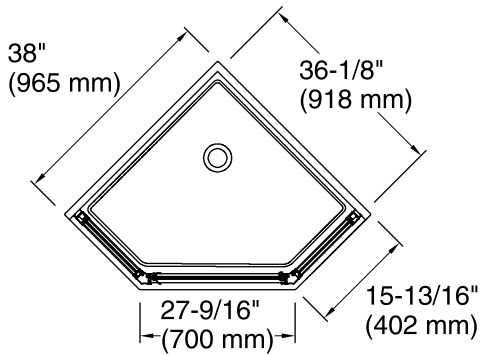

**Note:** Dimensions are taken on centerline of curb/threshold at the rough opening.

\* Walk-through

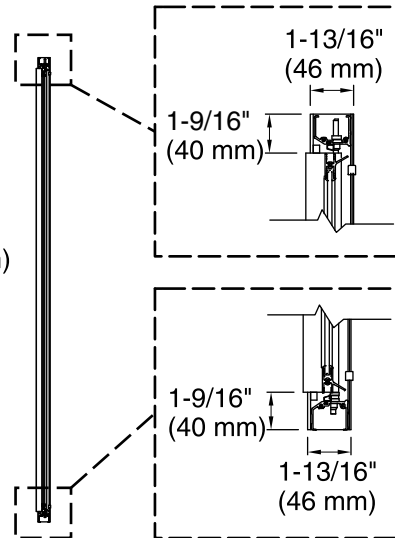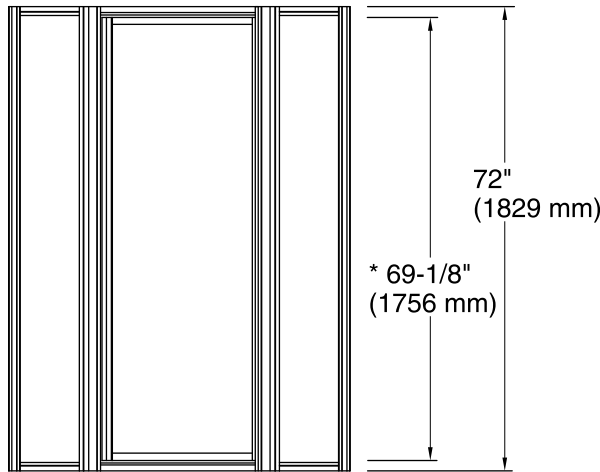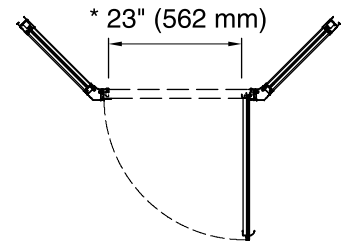

**Technical Information**

- All product dimensions are nominal.
- Installation type: For shower base installation
- Walk-through - Min: 23" (584 mm)
- Walk-through - Max: 27-9/16" (700 mm)
- Glass thickness: 1/8" (3 mm)

**Notes**

- Install this product according to the installation guide.
- The vertical opening should be a minimum of 75-1/2" (1918 mm) to allow for installation clearance.