

Standard

Framed Sliding Bath Door 500C-59

Features

- Adjustable rollers allow doors to slide effortlessly and quietly.
- Threshold conveniently directs water back into shower.
- Framed, 1/8" (3 mm) thick tempered glass.

Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

Components

Additional included component/s: Hardware kit.



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

S Silver


Available Glass Options
Code Description

Clear



Standard

Framed Sliding Bath Door 500C-59

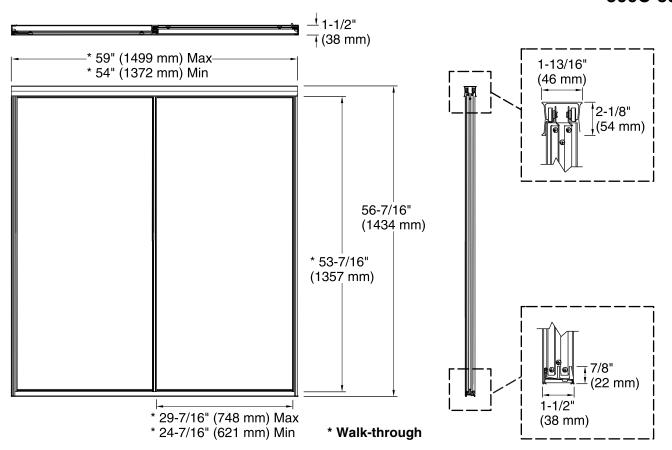

Technical Information

All product dimensions are nominal.

Installation type: For bath installation
Opening Width - Min: 54" (1372 mm)
Opening Width - Max: 59" (1499 mm)
Walk-through - Min: 24-7/16" (621 mm)
Walk-through - Max: 29-7/16" (748 mm)

Glass thickness: 1/8" (3 mm)

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 58" (1473 mm) to allow for installation clearance.