

Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Continuous guide mechanism for smooth, quiet sliding action and easy cleaning.
- Reversible top track and towel bar offer multiple aesthetic options.

Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

Components

Additional included component/s: Hardware kit.



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	S	Silver
	V	Matte Silver

Available Glass Options

Code	Description
	Rain

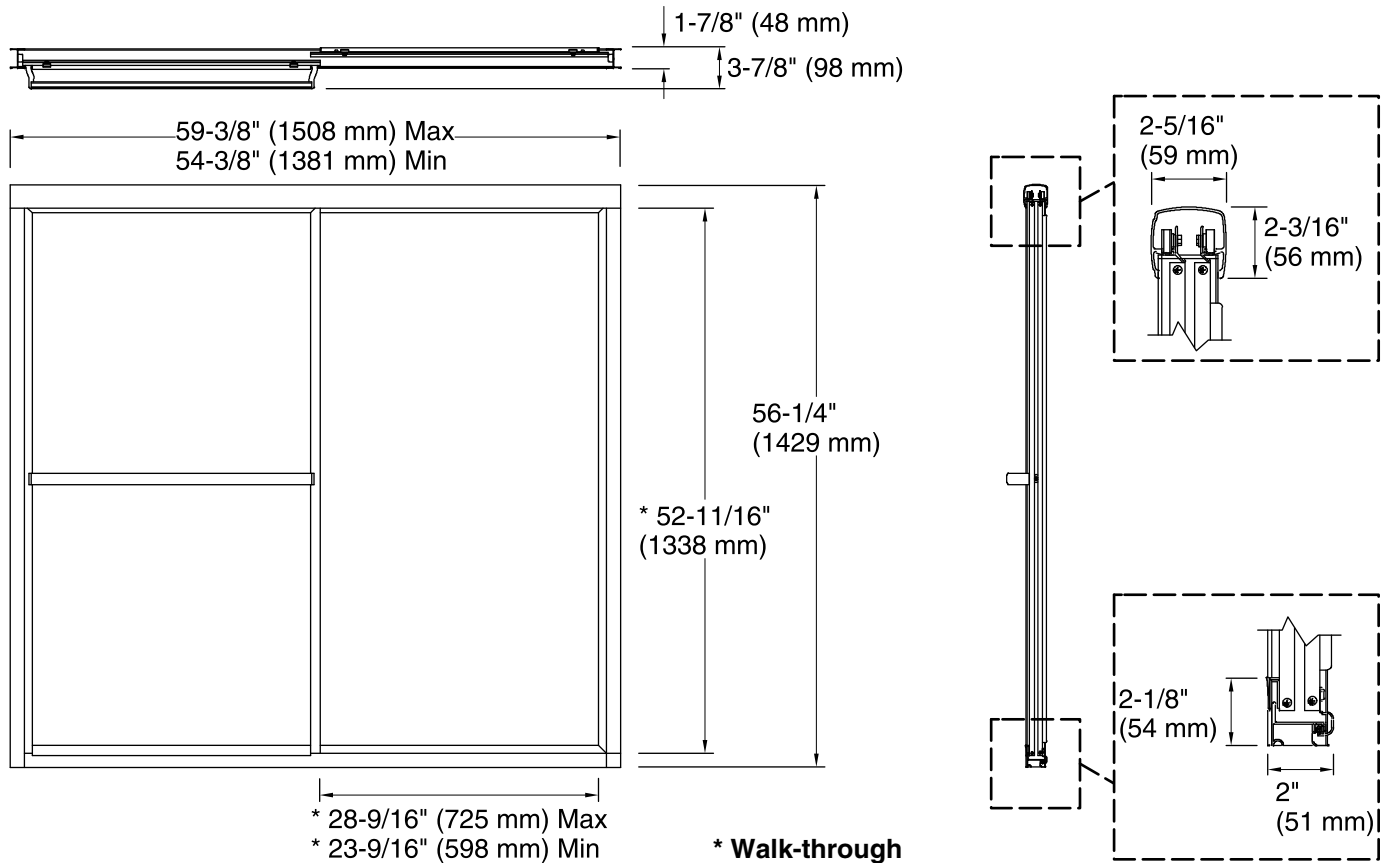

Technical Information

All product dimensions are nominal.

- Installation type: For bath installation
- Opening Width - Min: 54-3/8" (1381 mm)
- Opening Width - Max: 59-3/8" (1508 mm)
- Walk-through - Min: 23-9/16" (599 mm)
- Walk-through - Max: 28-9/16" (726 mm)
- Glass thickness: 1/8" (3 mm)

Notes

- Install this product according to the installation guide.
- The vertical opening should be a minimum of 57-3/4" (1467 mm) to allow for installation clearance.