



PREMIUM LUBRICANTS



PRODUCT CATALOG



www.smittysinc.net

CONTACT US

FOR SALES

Contact Smitty's Supply at **1-800-256-7575** and you will be connected with your regional sales manager.

Visit www.smittysinc.net for additional product information including forms for new customers.

NEW CUSTOMERS

Visit www.smittysinc.net and select the new customer button link under Contact. Please fill out the form and e-mail it back to:

sales@smittysinc.net or **Fax: 1-985-747-8168**

TECHNICAL INFORMATION

Super S® Product Data Sheets and Safety Data Sheets are available for download at:

www.smittysinc.net

For additional information please reach out to the Smitty's Supply technical department:

technical@smittysinc.net

Contact us on our website:

Go to www.smittysinc.net/ContactUs/

PROMOTIONS

Sign up for the latest Super S promotions and the Super S® Engine Protection Plan at:

www.smittysinc.net

VISIT SMITTY'S SUPPLY, INC

We welcome customers to tour our ISO-certified facility, and to learn about the extensive Super S product line.

To schedule a tour, please call:

1-800-256-7575

Our facility is located at:

Smitty's Supply, Inc.
63415 Highway 51 North
Roseland, LA 70456





ABOUT SMITTY'S SUPPLY 5 & THE SUPER S BRAND

PASSENGER CAR MOTOR OIL..... 6

- Super S[®] dexos1™ Motor Oil
- Super S[®] SuperSyn™ Full Synthetic Motor Oil
- Super S[®] Euro SuperSyn™ Full Synthetic Motor Oil
- Super S[®] Multi-Flo[®] Synthetic Blend Motor Oil
- Super S[®] Multi-Flo[®] High Mileage Motor Oil
- Super S[®] Custom Plus™ Motor Oil
- Super S[®] Non-Detergent Motor Oil

HEAVY DUTY MOTOR OILS 11

- Super S[®] SuperSyn™ Fleet HD Diesel Engine Oil 15W-40
- Super S[®] FG-2000[®] Heavy Duty Motor Oil
- Super S[®] FG-1000[®] Heavy Duty Synthetic Blend Motor Oil
- Super S[®] Custom Plus™ TURBO HD Synthetic Blend Motor Oil
- Super S[®] EMD Railroad Engine Oil

TRANSMISSION FLUIDS 14

- Super S[®] SuperSyn™ DEXRON[®]-VI Multi-Vehicle Full Synthetic ATF
- Super S[®] SuperSyn™ Premium Full Synthetic CVT Fluid
- Super S[®] SuperTrac[®] TO-4 Fluid
- Super S[®] SuperTrac[®] Premium Trans HD Fluid
- Super S[®] SuperSyn™ Trans-Fluid 40
- Super S[®] SuperSyn™ Trans-Fluid 50
- Super S[®] Multi-Flo[®] Multi-Vehicle Synthetic Blend ATF
- Super S[®] Multi-Flo[®] MERCON[®] V ATF
- Super S[®] Multi-Flo[®] Multi-Purpose Synthetic Blend ATF 4
- Super S[®] Multi-Flo[®] Multi-Purpose D/M ATF
- Super S[®] Custom Plus™ Multi-Purpose D/M ATF
- Super S[®] Type F ATF
- Super S[®] Type A ATF

GEAR OILS 18

- Super S[®] SuperSyn™ 75W-90 Synthetic Gear Oil
- Super S[®] SuperSyn™ 75W-90 Limited Slip Synthetic Gear Oil
- Super S[®] SuperSyn™ 75W-140 Limited Slip Synthetic Gear Oil
- Super S[®] SuperSyn™ 80W-140 Synthetic Gear Oil
- Super S[®] GL-5 Multi-Purpose Gear Oil
- Super S[®] GL-5 Limited Slip Gear Oil
- Super S[®] GL-5 Red Tac High Performance Gear Oil
- Super S[®] GL-4 Extreme Pressure Gear Oil
- Super S[®] GL-1 Gear Oil
- Super S[®] Limited Slip Additive for GL-5 Gear Oils
- Super S[®] Marine Outboard Lower Unit Gear Lube

HYDRAULIC FLUIDS 21

- Super S[®] Premium Universal Tractor Hydraulic Fluid
- Super S[®] Premium Universal J20D Tractor Hydraulic Fluid
- Super S[®] SuperDraulic™ AW Hydraulic Fluid

- Super S[®] Super Trac[®] J20A Tractor Hydraulic Fluid
- Super S[®] Anti-Wear Hydraulic Fluid
- Super S[®] Mining Hydraulic Oil
- Super S[®] R & O Hydraulic Oil

GREASE 24

- Super S[®] Super CS EP2 Synthetic Grease
- Super S[®] Super Blue EP2 Hi-Temp Grease
- Super S[®] Super Moly EP2 Grease
- Super S[®] Super MP2 Graphite Grease
- Super S[®] Marine EP Synthetic Grease
- Super S[®] Hi-Temp Red #2 EP Lithium Grease
- Super S[®] Multi-Purpose #2 (MP2) Lithium Grease
- Super S[®] "000" Red Lithium Grease
- Super S[®] "00" Cotton Picker Spindle Grease
- Super S[®] Cotton Picker Spindle Cleaner
- Super S[®] Post Tension Grease

INDUSTRIAL OILS 27

- Super S[®] WireSeal
- Super S[®] Premium R & O Turbine Oil
- Super S[®] Cherry Picker Oil
- Super S[®] Sawguide Oil
- Super S[®] Soluble Oil
- Super S[®] Quench Oil
- Super S[®] Waylube Oil
- Super S[®] Heat Transfer Oil
- Super S[®] Drip Oil
- Super S[®] Low Ash Gas Engine Oil
- Super S[®] Ashless Gas Engine Oil
- Super S[®] Rock Drill Oil
- Super S[®] Dairy Vacuum Pump Oil
- Super S[®] Synthetic Blend SAE 30 Compressor Oil
- Super S[®] Rotary Piston/Vacuum Pump Oil
- Super S[®] Transformer Oil
- Super S[®] Concrete Form Oil
- Super S[®] EP Gear Compound

ANTIFREEZE 30

- Super S[®] Extended Life Heavy Duty Truck Antifreeze and Coolant
- Super S[®] Extended Life 50/50 Heavy Duty
- Super S[®] Extended Life Antifreeze & Coolant
- Super S[®] 50/50 Prediluted Extended Life Antifreeze & Coolant
- Super S[®] Universal Antifreeze and Coolant
- Super S[®] 50/50 Prediluted Universal Antifreeze and Coolant
- Super S[®] Full Strength Antifreeze & Coolant
- Super S[®] 50/50 Antifreeze & Coolant
- Super S[®] Fleet Antifreeze & Coolant
- Super S[®] 50/50 Prediluted Fleet Antifreeze & Coolant
- Super S[®] RV & Marine Antifreeze



PREMIUM LUBRICANTS & SPECIALTY ITEMS

SUPERFUEL..... 32

- Super S® SuperFuel™ 40:1 2-Cycle Oil & Fuel
- Super S® SuperFuel™ 50:1 2-Cycle Oil & Fuel
- Super S® SuperFuel™ 4-Cycle Fuel

SMALL ENGINE OIL..... 33

- Super S® SuperSyn™ Full Synthetic Universal 2-Cycle Engine Oil
- Super S® SuperSyn™ 2-Cycle Full Synthetic Engine Oil with Ethanol & Fuel Stabilizer
- Super S® SuperSyn™ Synthetic Outboard 2-Cycle Marine Oil
- Super S® TC-W3 Premium Outboard Multi-Purpose 2-Cycle Oil
- Super S® 2-Cycle Mixing Oil
- Super S® Fuel Stabilizer 2 & 4-Cycle Treatment
- Super S® 4-Stroke LawnMower Oil
- Super S® Synthetic Snow Thrower 4-Cycle 5W-30 Engine Oil
- Super S® Snow Thrower 4-Cycle 5W-30 Engine Oil
- Super S® 4-Stroke Motorcycle/ATV Engine Oil
- Super S® Supertac Extreme Tac Bar & Chain Oil
- Super S® Bar & Chain Oil

AEROSOLS 36

- Super S® Non-Flammable Brake Parts Cleaner
- Super S® Non-Chlorinated Brake Parts Cleaner
- Super S® Choke/Carburetor Cleaner
- Super S® Penetrating Oil
- Super S® Starting Fluid
- Super S® Engine Degreaser
- Super S® Flat Tire Fix - Hose
- Super S® Flat Tire Fix - Cone
- Super S® De-Icer

TREATMENTS..... 38

- Super S® Octane Booster
- Super S® Oil Treatment
- Super S® Fuel Injector Treatment
- Super S® Power Steering Sealer
- Super S® Motor Flush
- Super S® Fuel Stabilizer & Ethanol Treatment
- Super S® Transmission Sealer
- Super S® Motor Sealer
- Super S® Diesel Conditioner & Anti-Gel
- Super S® Carb & Fuel Injector Cleaner
- Super S® Gas Treatment
- Super S® Lead Substitute
- Super S® Air Tool Oil & Jack Oil
- Super S® Ethanol Treatment
- Super S® Oil Stabilizer

CLEANING PRODUCTS 41

- Super S® Super Power Purple Degreaser
- Super S® Aluminum Brightener
- Super S® Super Power Car Wash
- Super S® Super Power Truck Wash
- Super S® Super Power Auto Wash & Wax
- Super S® Super Power Tire Shine
- Super S® Super Power Real White

SEA-WASH 43

- SEA-WASH® Super 7 Heavy Duty Degreaser
- SEA-WASH® Global 11 All Purpose Cleaner
- SEA-WASH® Citrus Cleaner
- SEA-WASH® Sea-Clear Glass Cleaner

WINDSHIELD WASHER FLUID 44

- Super S® All Season Windshield Washer Fluid
- Super S® Windshield Washer Concentrate
- Super S® Extreme Winter Windshield Washer Fluid - 20°
- Super S® Winter Windshield Washer Fluid 0°
- Super S® Summer Windshield Washer Fluid +21°
- Super S® Windshield Washer Fluid +32°
- Super S® Bug Wash Windshield Washer Fluid +32°

DEF 46

- Super S® DEF

POWER STEERING & BRAKE FLUID..... 47

- Super S® Honda/Acura Power Steering Fluid
- Super S® Premium Power Steering Fluid
- Super S® Power Steering Fluid
- Super S® DOT 3 Brake Fluid
- Super S® DOT 4 Brake Fluid
- Super S® DOT 5 Brake Fluid

SPECIALTY ITEMS 49

- Super S® Solvent 140
- Super S® Mineral Spirits
- Super S® K-1 Kerosene
- Super S® Superdry Industrial Absorbent
- Super S® Charcoal Lighter Fluid


SUPER S® PROMOTIONS 51

LICENSES & APPROVALS..... 52

SUPER S® SATISFACTION 54



Blending

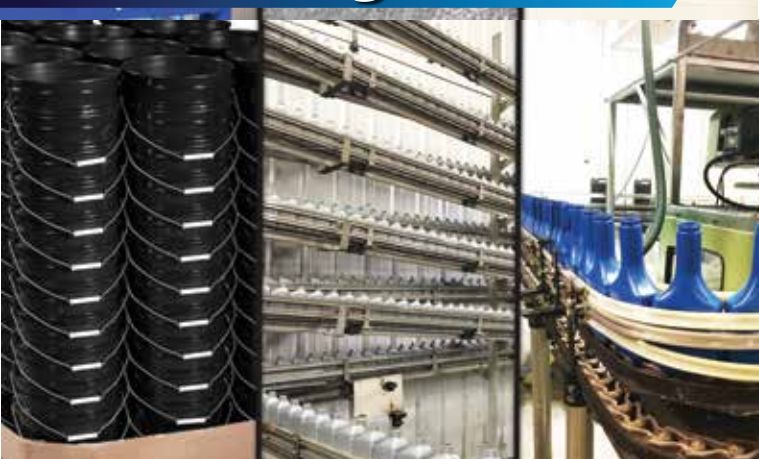

Plastics



Production



Distribution

ABOUT SMITTY'S SUPPLY

SMITTY'S SUPPLY, INC. IS A ONE OF A KIND SOLUTION FOR LUBRICANT MANUFACTURING AND DISTRIBUTION.

We provide our customers with a variety of diverse services and turn-key solutions through our ISO Certified facility. Our team of dedicated employees fully coordinate product development through blending, packaging and distribution to decrease overall time and expense for both bulk and consumer brands.

- Smitty's Supply, Inc. was founded in 1969 and now distributes product globally.
- In addition, we distribute brands including SUPER S®, Shell, Pennzoil, Quaker State, Chevron, Castrol and many more.

WHY SUPER S®?


SUPER S® is the most complete product line in the industry.

- Competitive Pricing
 - Worldwide Brand Recognition
 - Inventory Management
 - Technical Support/Current Licensing Fees/Trademark Fees
 - Complete Web Support including Free Mobile App
 - Dedicated Customer Service Support
 - Marketing Support & Materials Available for Various Product Lines
 - ISO-Certified Facility - A Proven Track Record For Quality.
- Smitty's Supply is an ISO 9001:2015 facility, which strives to meet the quality needs of all our customers.

• Super S® Satisfaction Lubricant Warranty and 10 Year/300,000 Mile Limited Warranty Program for Consumers

The SUPER S® SATISFACTION Lubricant Warranty is part of the Consumer Care Program. It's a customer satisfaction program and Lubricant Warranty to guarantee the quality of the fluids and the packaging on all of our products.

Super S® has added the Super S® Engine Protection Limited Warranty Program for drivers. Drivers may be covered against certain oil-related engine problems for 300,000 miles or 10 years, whichever comes first. Visit www.smittysinc.net to sign up and to view full details.



Supersyn™

PREMIUM MOTOR OIL
Aceite de Motor Premium



SUPER S® DEXOS1™ MOTOR OIL

Super S® dexos1™ motor oil is approved and licensed by General Motors for warranty service for all 2011 model year and newer GM gasoline engine cars and trucks. Super S® dexos1™ supersedes the GM6094M, GM4718M and GM-LL-A-025 specifications for 2010 and older GM vehicles and is now the only motor oil GM recommends for those vehicles. It is also licensed by API (American Petroleum Institute) for the ILSAC GF-5 Certification and AP SN Plus, SN-RC Service Category with "Resource Conserving" Performance.

Super S® dexos1™ Motor Oil is formulated to meet the latest fuel economy standards while exceeding the dexos1™ specifications for wear control, piston deposits, cleanliness, varnish, sludge, oxidation control, emission system and seal compatibility. These specifications are far more stringent than ILSAC GF-5 specification.

Meets or exceeds:

API SN PLUS • ILSAC GF-5

FOR GM MODELS



PRODUCT	PACKAGING	PART #
0W-20	6/1 Qt	SUS 795
	3/5 Qt	SUS 79505
	6 Gal	SUS 6795
5W-30	55 Gal	SUS 795-55
	6/1 Qt	SUS 796
	3/5 Qt	SUS 79605
	6 Gal	SUS 6796
	55 Gal	SUS 796-55



SUPER S® SUPERSYN™ FULL SYNTHETIC MOTOR OIL

Super S® SuperSyn™ is a 100% full synthetic motor oil engineered with the latest lubricant technology to provide the ultimate in engine protection and performance. Engineered for gasoline engines to provide superior protection against engine wear, eliminate LSPI occurrence, formation of sludge and extreme high temperatures which can cause conventional oils to break down. Compatible with all conventional and synthetic oils.

0W-16, 5W-20, 10W-30 Meets or exceeds:

API SN PLUS • ILSAC GF-5

0W-40, 5W-40 Meets or exceeds:

API SN PLUS



SUPER S® EURO SUPERSYN™ FULL SYNTHETIC MOTOR OIL

Super S® Euro SuperSyn™ Motor Oil is a full synthetic Mid SAPS engine oil formulated to meet the ACEA C3-16 technical requirements of the most demanding automobile manufacturers including General Motors, BMW, Volkswagen, Mercedes-Benz, and Honda/ Kia. Provides unmatched protection under the most severe conditions including sports driving, city and motorway, off road, and is suitable for use in both gas & diesel engines.

5W-30 & 5W-40 Meets or exceeds:

Euro SuperSyn™ 5W-30 Motor Oil are specifically designed for use wherever ACEA C3-16 or API-SN/CF or previous motor oil specifications are called for. Euro C3 also meets the performance requirements of the following OEMs: MB 229.51, MB 229.31, Porsche C30, dexos 2™, JASO DL-1, PSA B71 2288, VW 504.00/507.00, VW 502.00, VW 503.01(OBSOLETE) **ACEA C3-16**



SUPER S® EURO SUPERSYN™ FULL SYNTHETIC MOTOR OIL

Super S® Euro SuperSyn™ Full Synthetic Motor Oil provides among the highest levels of performance and protection ever offered in passenger car motor oils (PCMOs) by using newly developed additive technology and formulations of 100% synthetic base oils. They are licensed as API SL and meets the latest (2011) fuel economy standards while dramatically exceeding specifications for wear control, piston deposits, cleanliness, varnish and sludge, oxidation control, and emission system and seal compatibility. European classifications: ACEA A3/B4-16, BMW Longlife-01, MB P229.3/229.5, VW 502.00/505.01, RN 0700/0710, PSA B71 2296, and API SL/CF and is suitable for use in Ford WSS-M2C913-C. **ACEA A3/B4**

PRODUCT	PACKAGING	PART #
0W-16	6/1 Qt	SUS 797
	6 Gal	SUS 6801
0W-40	6/1 Qt	SUS 401
	6 Gal	SUS 60401
5W-20	6/1 Qt	SUS 393
	3/5 Qt	SUS 39305
	6 Gal	SUS 6393
5W-40	55 Gal	SUS 393-55
	6/1 Qt	SUS 397
	3/1 Gal	SUS 397-3
10W-30	55 Gal	SUS 399
	6/1 Qt	SUS 350
	6 Gal	SUS 60350
	55 Gal	SUS 353

PRODUCT	PACKAGING	PART #
5W-30	6/1 Qt	SUS 394
	6 Gal	SUS 60394
	55 Gal	SUS 394-55
5W-40	6/1 Qt	SUS 398
	6 Gal	SUS 60398
	55 Gal	SUS 398-55

PRODUCT	PACKAGING	PART #
5W-30	6/1 Qt	SUS 395
	6 Gal	SUS 60395
	55 Gal	SUS 395-55
5W-40	6/1 Qt	SUS 396
	6 Gal	SUS 60396
	55 Gal	SUS 396-55

FLO®

MULTI

PREMIUM MOTOR OIL

Aceite de Motor Premium



SUPER S® MULTI-FLO® MOTOR OIL

Super S® Multi-Flo® Motor Oils are formulated to provide the highest levels of performance and protection in passenger car motor oils (PCMO). They meet the latest fuel economy standards while exceeding the car manufacturer's ILSAC GF-5 standards for wear control, piston deposits, cleanliness, varnish, sludge, oxidation control, emission system and seal compatibility. Super S® Multi-Flo® SN Motor Oils in grades SAE 30 and SAE 40 are formulated with synthetic blend motor oils.

- LSPI protection
- Fuel economy gains
- Low oil consumption
- Excellent anti-wear, anti-foam, bearing corrosion and anti-rust protection
- Excellent protection from deposits at all operating temperatures
- Excellent cold cranking capabilities
- Up to 40% cleaner pistons than the industry standard
- Extremely low volatility providing extended drain protection
- Compatible with conventional motor oils

They are licensed by API for the SN PLUS Service Category.

5W-20, 5W-30, 10W-30 Meets or exceeds:

API SN PLUS • ILSAC GF-5

10W-40, 20W-50, SAE 30, SAE 40 Meets or exceeds:

API SN PLUS

PRODUCT	PACKAGING	PART #	PRODUCT	PACKAGING	PART #
5W-20	12/1 Qt	SUS 121	10W-40	12/1 Qt	SUS 51
	3/5 Qt	SUS 12105-3		3/1 Gal	SUS 51-3
	6 Gal	SUS 6121		3/5 Qt	SUS 5105-3
	55 Gal	SUS 121-55		6 Gal	SUS 651
5W-30	12/1 Qt	SUS 93	20W-50	55 Gal	SUS 60
	3/1 Gal	SUS 93-3		12/1 Qt	SUS 48
	3/5 Qt	SUS 9305-3		3/1 Gal	SUS 48-3
	6 Gal	SUS 693		3/5 Qt	SUS 4805-3
	55 Gal	SUS 93-55		6 Gal	SUS 648
10W-30	12/1 Qt	SUS 50	55 Gal	SUS 48-55	
	3/1 Gal	SUS 50-3	SAE 30	12/1 Qt	SUS 49
	3/5 Qt	SUS 5005-3		55 Gal	SUS 64
	5 Gal	SUS 76	SAE 40	12/1 Qt	SUS 98
	6 Gal	SUS 650			
	55 Gal	SUS 59			

FLO®

MULTI HIGH MILEAGE

PREMIUM MOTOR OIL
Aceite de Motor Premium



SUPER S® MULTI-FLO® HIGH MILEAGE MOTOR OIL

Super S® Multi-Flo® High Mileage Motor Oil is specially formulated to help extend the life of higher mileage engines. The high mileage additive is strengthened with seal conditioning agents to target problems such as oil leaks, oil consumption and sludge build-up. Multi-Flo® High Mileage Motor Oil meets the latest fuel economy standards while exceeding the industry standards for wear control, piston deposits, cleanliness, sludge, oxidation control, emission systems and seal compatibility.

Multi-Flo® High Mileage Motor Oil meets or exceeds the latest American Petroleum Institute (API) SN Plus, SN-RC and car manufacturers' ILSAC GF-5 classifications as well as all previous service classifications.

Meets or exceeds:

API SN PLUS • ILSAC GF-5

PRODUCT	PACKAGING	PART #
5W-20	3/5 Qt	SUS 1584
	6 Gal	SUS 61584
5W-30	12/1 Qt	SUS 1581
	3/5 Qt	SUS 1585
	6 Gal	SUS 61581
10W-30	12/1 Qt	SUS 1580
	3/5 Qt	SUS 1586
	6 Gal	SUS 61580
10W-40	12/1 Qt	SUS 1582
	6 Gal	SUS 61582

FOR
ENGINES OVER



MILES.

Super S[®] Custom Plus[™] Motor Oil



SUPER S[®] CUSTOM PLUS[™] MOTOR OIL

Super S[®] Custom Plus[™] Motor Oils feature premium base oils in formulation with proven high-quality anti-wear additives. This oil is designed for use in gasoline engines, combining versatility, heavy-duty engine protection and cost effectiveness into one motor oil. It is formulated with high levels of dispersant and detergent additives that effectively control sludge and varnish to help prevent corrosion, wear and deposits.

PRODUCT	PACKAGING	PART #
5W-20	12/1 Qt	CUS 98201
5W-30	12/1 Qt	CUS 98202
10W-30	12/1 Qt	CUS 98203
10W-40	12/1 Qt	CUS 98204
	55 Gal	CUS 204-55
20W-50	12/1 Qt	CUS 98205
	5 Gal	CUS 205-5
	55 Gal	CUS 205-55

Super S[®] Custom Plus[™] Motor Oil



SUPER S[®] CUSTOM PLUS[™] MOTOR OIL

Super S[®] Custom Plus[™] Motor Oil is manufactured with high quality base oils and fortified with an anti-foaming additive for extra lubrication at an economical price. Super S[®] Custom Plus[™] Motor Oil meets or exceeds car manufacturers' warranty requirements where an API Service SF/CF motor oil is recommended. It provides economical lubrication for older cars in light duty service which do not require high performance oils. Always consult your owner's manual for proper recommendations.

PRODUCT	PACKAGING	PART #
SAE 30	55 Gal	CUS 98352
SAE 40	12/1 Qt	CUS 98354
	3/1 Gal	CUS 98355
	5 Gal	CUS 98356
	55 Gal	CUS 98357
SAE 50	12/1 Qt	CUS 98358
	3/1 Gal	CUS 98359
	5 Gal	CUS 98360
	55 Gal	CUS 98361

Non-Detergent Motor Oil



SUPER S[®] NON-DETERGENT MOTOR OIL

Super S[®] Non-Detergent Motor Oils are manufactured with a quality base oil and fortified with an anti-foaming additive for engine lubrication at an economical price. Super S[®] Non-Detergent Motor Oils are for engines that do not require a high-detergent motor oil. They may be used where equipment suppliers call for a non-detergent motor oil with API SB requirements.

Meets requirements of:

API SB

CAUTION: This oil is rated API SB and is not suitable for use in most gasoline powered automotive engines built after 1951. Use in more modern engines may cause unsatisfactory performance or equipment harm.

PRODUCT	PACKAGING	PART #
SAE 10	12/1 Qt	SUS 84
	3/1 Gal	SUS 84-3
	5 Gal	SUS 7
SAE 20	12/1 Qt	SUS 85
	55 Gal	SUS 85-55
	55 Gal	SUS 93-55
SAE 30	12/1 Qt	SUS 41
	2 Gal	SUS41-2
	5 Gal	SUS 10
	55 Gal	SUS 16
SAE 40	12/1 Qt	SUS 45
	3/1 Gal	SUS 45-3
	3/5 Qt	SUS 4505-3
	5 Gal	SUS 11
	55 Gal	SUS 11-55
SAE 50	12/1 Qt	SUS 86
	3/1 Gal	SUS 86-3
	3/5 Qt	SUS 8605-3
	5 Gal	SUS 86-5

FG-2000®

PREMIUM HEAVY DUTY MOTOR OIL



SUPER S® SUPERSYN™ FLEET HD DIESEL ENGINE OIL 15W-40

Super S® SuperSyn™ Synthetic Fleet HD is a heavy-duty diesel engine oil formulated especially to meet the latest engine requirements. Super S® SuperSyn™ Fleet HD Diesel Engine Oil protects against sludge build-up in engines and provides extra protection against high temperatures. It is recommended for both new and older diesel and gasoline powered engines when monitored extended drain intervals are desired. It is formulated to meet the latest engine requirements.

GUARANTEED to meet or exceed the American Petroleum Institute (API) CK-4, CJ-4, CI-4 Plus, CH-4 API SN (15W-40) classification as well as the performance requirements of Cummins CES20086³, CAT ECF-3, Detroit Diesel DFS93K222, Ford Powerstroke (WSS-W2C171-F), John Deere Tier IV Engines, Mack EOS-4.5, JASO DH-2, Volvo VDS-4.5, Renault RDL-4, ACEA E9-16, MB 228.31, MAN 3275/3575, MTU 2.1, Deutz DQC III-10 LA

PRODUCT	PACKAGING	PART #
15W-40	3/1 Gal	SUS 295-3
	55 Gal	SUS 297



SUPER S® FG-2000® CK-4 HEAVY DUTY SYNTHETIC BLEND MOTOR OIL

Super S® FG-2000® CK-4 Heavy Duty Synthetic Blend Motor Oil is recommended for all types of service in truck and automotive diesel and gasoline engines, including those with diesel particulate filters. It provides excellent engine protection, extends engine life and controls oil consumption.

GUARANTEED to meet or exceed the American Petroleum Institute (API) CK-4, CJ-4, CI-4 Plus, CH-4 API SN (15W-40) classification as well as the performance requirements of Cummins CES20086³, CAT ECF-3, Detroit Diesel DFS93K222, Ford Powerstroke (WSS-W2C171-F), John Deere Tier IV Engines, Mack EOS-4.5, JASO DH-2, Volvo VDS-4.5, Renault RDL-4, ACEA E9-16, MB 228.31, MAN 3275/3575, MTU 2.1, Deutz DQC III-10 LA

PRODUCT	PACKAGING	PART #
10W-30	3/1 Gal	SUS 99
	5 Gal	SUS 99-5
	55 Gal	SUS 99-55-2
15W-40	3/1 Gal	SUS 95
	3/5 Qt	SUS 9515-3
	2 Gal	SUS 95-2-2
	5 Gal	SUS 95-5
	55 Gal	SUS 95-55

Super S® HEAVY DUTY Motor Oils



SUPER S® FG-1000® HEAVY DUTY MOTOR OIL

Super S® FG-1000® Heavy Duty Engine Oils are heavy duty engine oils formulated to meet the needs of older engines operating in severe service for both on and off highway conditions. The detergent additive package helps maintain engine cleanliness while providing wear protection and deposit control, helping to prolong engine life.

Meets the requirements of:

Suitable for use in vehicles requiring API CF2, CF, CE, CDII, CD and SJ, SH, SG

PRODUCT	PACKAGING	PART #
SAE 10	5 Gal	SUS 130
	55 Gal	SUS 131
SAE 30	12/1 Qt	SUS 96
	3/1 Gal	SUS 157-3
	5 Gal	SUS 73
SAE 40	55 Gal	SUS 57
	12/1 Qt	SUS 97
	3/1 Gal	SUS 158-3
SAE 50	5 Gal	SUS 74
	55 Gal	SUS 58
	12/1 Qt	SUS 134
	3/1 Gal	SUS 134-3
	5 Gal	SUS 132
	55 Gal	SUS 133



SUPER S® FG-1000® HEAVY DUTY MOTOR OIL

Super S® FG-1000® 20W-50 CI4/SL Engine Oil is exceptionally versatile, premium quality, multi-grade crankcase lubricants giving outstanding performance in both diesel and gasoline engines in severe service and various operating conditions. Formulated using state-of-the-art additives and Group II base oils to meet current API and OEM requirements for volatility and oxidation resistance.

Meets the requirements of:

API CI-4/SL; Mack EO-N Premium Plus, EO-M Plus, Detroit Diesel Series 50, series 60, Volvo VDSs, VDS 2

PRODUCT	PACKAGING	PART #
20W-50	5 Gal	SUS 2050
	55 Gal	SUS 2055

Super S® HEAVY DUTY Motor Oils



SUPER S® CUSTOM PLUS™ TURBO HD SYNTHETIC BLEND MOTOR OIL

Super S® Custom Plus™ TURBO HD Synthetic Blend Motor Oil is recommended for all types of service in truck and automotive diesel and gasoline engines, including those with diesel particulate filters. It provides excellent engine protection, extends engine life and controls oil consumption. This product has been extensively tested and performs well in automotive service applications and is compatible with API approved engine oils. Super S® Custom Plus™ TURBO HD Synthetic Blend Motor Oil show acceptable performance where API CI-4 Plus, CH-4/SL is recommended as well as the performance requirements of Mack EO-M Premium Plus, ACEA E3, Navistar, ACEA E5, Volvo VDS-2, Cummins CES 20078, Global DHD-1, and MB 228.3.



SUPER S® CUSTOM PLUS™ TURBO HD SYNTHETIC BLEND MOTOR OIL

Super S® Custom Plus™ TURBO HD Synthetic Blend Motor Oil is recommended for all types of service in truck and automotive diesel and gasoline engines. It provides excellent engine protection, extends engine life and controls oil consumption. This product has been extensively tested and performs well in automotive service applications and is compatible with API approved engine oils. Super S® Custom Plus™ TURBO HD Synthetic Blend Motor Oil show acceptable performance where API CH-4 is recommended.



SUPER S® EMD RAILROAD ENGINE OIL

Super S® EMD Railroad Engine Oil is a superior, Low Ash Heavy Duty engine oil formulated to address the emerging fuel and emission standards coming to large, medium speed locomotive, marine vessels, and electric-powered generators. It is formulated with a blend of stable synthetic and premium mineral base stocks for long-life performance in 2 and 4 stroke Gen 6 (and all previous category) engines used in a wide range of marine trunk piston, railroad, inland marine, mining and stationary engine applications. Patented non-chlorinated technology is future proof for Gen 7 emission requirements.

PRODUCT	PACKAGING	PART #
15W-40	12/1 Qt	CUS 98303
	3/1 Gal	CUS 98304
	5 Gal	CUS 98315
20W-50	55 Gal	CUS 98316
	12/1 Qt	CUS 98305
	3/1 Gal	CUS 98306
	5 Gal	CUS 98317
	55 Gal	CUS 98318

PRODUCT	PACKAGING	PART #
15W-40	12/1 Qt	CUS 98307
	3/1 Gal	CUS 98308
	5 Gal	CUS 98319
20W-50	55 Gal	CUS 98320
	12/1 Qt	CUS 98309
	3/1 Gal	CUS 98310
	5 Gal	CUS 98321
25W-50	55 Gal	CUS 98322
	12/1 Qt	CUS 98311
	3/1 Gal	CUS 98312
	5 Gal	CUS 98323
25W-60	55 Gal	CUS 98324
	12/1 Qt	CUS 98313
	3/1 Gal	CUS 98314
	5 Gal	CUS 98325
	55 Gal	CUS 98326

(Contact your sales rep for more information regarding this product)

SUPERTMSYNTM

AUTOMATIC TRANSMISSION FLUID



SUPER S[®] SUPERSYN[™] DEXRON[®]-VI FULL SYNTHETIC MULTI-VEHICLE ATF

Super S[®] SUPERSYN[™] DEXRON[®]-VI Full Synthetic Multi-Vehicle ATF was specifically developed for GM automatic transmissions manufactured beginning with the 2006 model year. It is the only GM approved and licensed product for all GM vehicles requiring DEXRON[®] ATF. It is a low viscosity, full synthetic ATF formulated with a premium additive package to provide superior performance, protection and service life as compared to conventional ATFs.

PRODUCT	PACKAGING	PART #
DEXRON	12/1 Qt	SUS 3228
VI ATF	6 Gal	SUS 63228
	55 Gal	SUS 3228-55



SUPER S[®] SUPERSYN[™] PREMIUM FULL SYNTHETIC CVT FLUID

Super S[®] SuperSyn[™] Premium Full Synthetic CVT Fluid is a full synthetic transmission fluid specifically designed to provide outstanding performance in North American vehicles equipped with belt-driven Continuously Variable Transmissions. Modern CVTs, Continuously Variable Transmissions, are very different from automatic transmissions in design, materials and operation. They require a specialized fluid with friction and viscosity characteristics contrary to those of automatic transmissions. Slipping, loss of performance and long-term damage may potentially result from the use of the wrong fluid.

PRODUCT	PACKAGING	PART #
CVT Fluid	12/1 Qt	SUS 229
	6 Gal	SUS 6229
	55 Gal	SUS 229-55



SUPER S[®] SUPERTRAC[®] TO-4 FLUIDS

Super S[®] Super Trac[®] TO-4 Fluids meet the requirements of Caterpillar TO-4, and Komatsu Micro-Clutch. They are heavy duty lubricants formulated for use in transmission and final drives requiring Caterpillar TO-4 or Allison C-4 fluids, formulated with highly refined base oils, detergents, dispersants, oxidation and corrosion inhibitors, anti-wear and EP (extreme pressure) agents, and a foam suppressant. Super Trac TO-4 Fluids can also be used in wet brakes, hydrostatic transmissions, torque converters, and hydraulic systems calling for TO-4 or C-4 Fluids.

PRODUCT	PACKAGING	PART #
SAE 10	5 Gal	SUS 140
	55 Gal	SUS 141
SAE 30	5 Gal	SUS 142
	55 Gal	SUS 143
SAE 50	5 Gal	SUS 144
	55 Gal	SUS 145



SUPER S® SUPERSYN™ PREMIUM TRANS HD FLUID

Super S® SuperSyn™ Premium HD Trans is a premium quality heavy-duty universal power shift and automatic transmission fluid suitable for use in transmissions in heavy duty fleets in normal to severe service. It is engineered to meet the requirements of the latest model heavy-duty transmissions and enables extended service up to 100,000 miles under normal driving conditions.

PRODUCT	PACKAGING	PART #
Trans.	35 lb	SUS 227
Fluid 40	110 lb	SUS 227-5
	400 lb	SUS 221-55



SUPER S® SUPERSYN™ TRANS-FLUID 40 API MT-1 MANUAL TRANSMISSION FLUID

Super S® SuperSyn™ Trans-Fluid 40 API MT-1 Manual Transmission Fluid is a full synthetic, heavy duty SAE 40 manual transmission fluid formulated with premium quality synthetic base stocks and high performance additives for API MT-1 Eaton PS.386 non-EP extended drain service. Super S SuperSyn™ Trans-Fluid 40 remains fluid at extremely low temperatures for cold weather shifting and to help eliminate premature wear (especially at start-up), and it maintains lubricity and film strength at high temperatures.

PRODUCT	PACKAGING	PART #
Trans.	35 lb	SUS 221
Fluid 40	110 lb	SUS 221-16
	400 lb	SUS 221-55

Meets or exceeds:

API MT-1 • Eaton PS.386



SUPER S® SUPERSYN™ TRANS-FLUID 50 API MT-1 MANUAL TRANSMISSION FLUID

Super S® SuperSyn™ Trans-Fluid 50 API MT-1 Manual Transmission Fluid is a full synthetic, heavy duty SAE 50 manual transmission fluid formulated with premium quality synthetic base stocks and high performance additives for API MT-1 Eaton PS.164 Rev 7 non-EP extended drain service. Super S SuperSyn™ Trans-Fluid 50 remains fluid at extremely low temperatures for cold weather shifting and to help eliminate premature wear (especially at start-up), and it maintains lubricity and film strength at high temperatures.

PRODUCT	PACKAGING	PART #
Trans.	35 lb	SUS 219
Fluid 50	110 lb	SUS 219-16
	400 lb	SUS 219-55

Meets or exceeds:

API MT-1 • Eaton PS.164 Rev 7



SUPER S® MULTI-FLO® MULTI-VEHICLE SYNTHETIC BLEND ATF

Super S® Multi-Flo® Multi-Vehicle Synthetic Blend ATF is designed to meet the performance requirements of a broad range of automatic and power shift transmissions and should provide trouble-free performance in most American-made and many foreign-made vehicles. It is made with a blend of conventional and synthetic base stocks to provide better performance and protection at start-up and in cold weather, and to provide better high temperature and anti-wear protection, especially for heavy hauling and more demanding service.

PRODUCT	PACKAGING	PART #
M/V	12/1 Qt	SUS 226-12
S/B ATF	55 Gal	SUS 226

Super S[®] TRANSMISSION FLUIDS



SUPER S[®] MULTI-FLO[®] MERCON[®] V ATF

Super S[®] Multi- Flo[®] MERCON[®] V ATF meets the performance requirements for Ford's MERCON[®] and MERCON[®] V service fill specifications. It also meets GM DEXRON[®] III and Allison C-4 specifications.

PRODUCT	PACKAGING	PART #
MERCON V	12/1 Qt	SUS 225
	55 Gal	SUS 225-55



SUPER S[®] MULTI-FLO[®] MULTI-PURPOSE SYNTHETIC BLEND ATF 4

Super S[®] Multi-Flo[®] Multi-Purpose Synthetic Blend ATF 4 is specially formulated from high VI base stocks. Designed to be a "Fill for Life" fluid under normal driving conditions. ATF 4 is fully compatible with all transmission applications where 7176, ATF+2 or ATF+3 and Type 9662 Automatic Transmission Fluid is specified.

PRODUCT	PACKAGING	PART #
ATF 4	12/1 Qt	SUS 224
	55 Gal	SUS 224-55



SUPER S[®] MULTI-FLO[®] MULTI-PURPOSE D/M ATF

Super S[®] Multi-Flo[®] Multi-Purpose D/M ATF meets the GM DEXRON[®] IIIH specification, and may be used in a broad range of domestic and foreign transmissions where DEXRON[®] IIIIG, DEXRON[®] IIE, DEXRON[®] II, DEXRON[®], MERCON[®], or Type A Suffix A transmission fluid is specified. It also meets the performance requirements of Allison C-3, C-4, Chrysler ATF-Plus, CAT TO-2 and anti-wear hydraulic fluid. It is used in cars, light and heavy duty trucks, commercial vehicles, buses, on- and off-highway vehicles and power steering systems.

PRODUCT	PACKAGING	PART #
M/P ATF	12/1 Qt	SUS 26
	3/1 Gal	SUS 126-3
	5 Gal	SUS 6
	55 Gal	SUS 44



SUPER S® CUSTOM PLUS™ MULTI-PURPOSE D/M ATF

Super S® Custom Plus™ Multi-Purpose D/M ATF is designed for new generation, electronically controlled transmissions in cars and trucks including pre-2006 General Motors as well as Ford, Chrysler and most foreign manufacturers' transmissions where DEXRON® III H or MERCON® or previous specifications are recommended. It may also be used in many torque converters, and power shift and hydrostatic transmissions; and in some hydraulic systems and compressors where excellent low temperature flow and anti-wear properties are required.

PRODUCT	PACKAGING	PART #
D/M	12/1 Qt	CUS 98209
	3/1 Gal	CUS 98208
	55 Gal	CUS 209-55



SUPER S® TYPE F ATF

Super S® Type F ATF is used in all Ford transmissions made until 1977 and some pre-1982 transmissions. It meets the requirements of Ford specification M2C33-F and may be used wherever the manufacturer recommends a Type F ATF.

PRODUCT	PACKAGING	PART #
TYPE F ATF	12/1 Qt	SUS 27
	55 Gal	SUS 27-55



SUPER S® ECONOMY TYPE A ATF

Super S® Economy Type A ATF is formulated primarily for add-on (top-off) purposes and for high consumption transmissions. Not for full service fill. Not intended for use in transmissions made after 1957.

PRODUCT	PACKAGING	PART #
TYPE A ATF	12/1 Qt	SUS 42
	3/1 Gal	SUS 42-3
	5 Gal	SUS 42-5
	55 Gal	SUS 42-55

Super S® GEAR OILS



SUPER S® SUPERSYN™ 75W-90 SYNTHETIC GEAR OIL



Super S® SuperSyn™ 75W-90 Synthetic Gear Oil is a full synthetic heavy duty gear lubricant that provides extended drain service, improved fuel efficiency, and is designed to meet the service demands of automobile, light truck and the latest heavy duty manual transmissions, axles and drive units that call for API GL-5/MT-1. SuperSyn 75W-90 Gear Oil is formulated for extreme pressure, severe service, and is thermally stable with a low pour point for all season use even at sub-zero temperatures.

PRODUCT	PACKAGING	PART #
Syn 75W-90	12/1 Qt	SUS 217
	35 lb Pail	SUS 217-5
	110 lb Keg	SUS 217-16
	400 lb Drum	SUS 217-55

SUPER S® SUPERSYN™ LIMITED SLIP 75W-90 SYNTHETIC GEAR OIL



Super S® SuperSyn™ 75W-90 Synthetic Gear Oil is a full synthetic heavy duty gear lubricant that provides extended drain service, improved fuel efficiency, and is designed to meet the service demands of automobile, light truck and the latest heavy duty manual transmissions, axles and drive units that call for API GL-5/MT-1. SuperSyn 75W-90 Gear Oil is formulated for extreme pressure, severe service, and is thermally stable with a low pour point for all season use even at sub-zero temperatures.

PRODUCT	PACKAGING	PART #
Syn 75W-90	35 lb Pail	SUS 217-5LS
	110 lb Keg	SUS 217-16
	400 lb Drum	SUS 217-55LS

SUPER S® SUPERSYN™ 75W-140 LIMITED SLIP SYNTHETIC



Super S® SuperSyn™ 75W-140 Limited Slip Synthetic is a multi-purpose full synthetic automotive gear lubricant designed to meet the performance requirements of many modern passenger vehicles in all types of operating conditions. It provides excellent performance in Limited Slip applications, reducing chatter, slipping and noise while improving traction.

Super S® SuperSyn™ 75W-140LS is typically used in differentials, final drives, transfer cases and rear axles in modern, high performance vehicles such as SUVs, vans and light duty trucks where GL-5 is recommended. It's improved frictional properties improve fuel economy and reduce operating costs.

PRODUCT	PACKAGING	PART #
Syn 75W-140 Limited Slip	12/1 Qt	SUS 216
	35 lb Pail	SUS 216-5
	110 lb Keg	SUS 216-16
	400 lb Drum	SUS 216-55



SUPER S® SUPERSYN™ 80W-140 SYNTHETIC GEAR OIL

Super S® SuperSyn™ is a full synthetic heavy duty gear lubricant developed for heavy duty differentials calling for GL-5 service. Applications also include rear wheel bearings and universal joints, automobile, light and heavy duty truck transfer cases, heavy construction and farm equipment, industrial gear units and manual transmissions.



SUPER S® GL-5 MULTI-PURPOSE GEAR OIL

Super S® GL-5 Multi-Purpose Gear Oils are high performance, heavy duty, EP (extreme pressure) gear lubricants formulated to withstand severe service and severe environments in cars, trucks and heavy equipment. They provide excellent wear resistance, load carrying capability and oxidation stability, while protecting against rust, corrosion and foaming. Applications include conventional and high performance differentials.



SUPER S® GL-5 LIMITED SLIP GEAR OIL

Super S® GL-5 Limited Slip Gear Oil are the same as GL-5, but with additives for Limited Slip differentials.



SUPER S® GL-5 RED TAC HIGH PERFORMANCE GEAR OIL

Super S® GL-5 Red is the same as GL-5 gear oil, but formulated with high VI (viscosity index) thermally stable base stocks and a highly effective sulphur-phosphorus extreme pressure, anti-wear, anti-scuff, anti-weld additive system with a red tackifier to provide greater adhesion to gears and leak detection.

PRODUCT	PACKAGING	PART #
Syn 80W-140	35 lb Pail	SUS 218-5
	110 lb Keg	SUS 218-16
		SUS 218-55

PRODUCT	PACKAGING	PART #
80W-90	12/1 Qt	SUS 17
	3/1 Gal	SUS 82-3
	35 lb Pail	SUS 52
	110 lb Keg	SUS 87
	400 lb Drum	SUS 53
85W-140	12/1 Qt	SUS 25
	3/1 Gal	SUS 83-3
	35 lb Pail	SUS 54
	110 lb Keg	SUS 88
	400 lb Drum	SUS 55

PRODUCT	PACKAGING	PART #
80W-90LS	35 lb Pail	SUS 52LS
	110 lb Keg	SUS 87LS
	400 lb Drum	SUS 53LS

PRODUCT	PACKAGING	PART #
85W-140	35 lb Pail	SUS 54RT
	400 lb Drum	SUS 55RT

Super S[®] GEAR OILS



SUPER S[®] GL-4 EXTREME PRESSURE GEAR OIL

Super S[®] GL-4 Heavy duty gear lubricants are formulated with sulfur-phosphorus EP additives to provide anti-wear and anti-scuff performance for use in automobiles, trucks and heavy equipment calling for GL-4 gear oils, especially gears subject to shock loading. They provide excellent performance in high load operations and in extreme temperatures, and also provide oxidation stability, corrosion resistance, and anti-foam protection. Meets the performance requirements of API GL-4, MIL-L-2105 and SAE J-2360.



SUPER S[®] GL-1 GEAR OIL

Super S[®] GL-1 Gear Oils are straight mineral gear oils blended from mid Viscosity Index base stocks and are intended for mild service in a broad range of automotive, manual transmission and industrial gear and bearing applications operating under conditions of low unit pressure and minimum sliding velocities. They may contain oxidation, rust and corrosion inhibitors, anti-foam agents and pour point depressants. Super S GL-1 gear oils do not contain friction modifiers or extreme pressure additives.



SUPER S[®] LIMITED SLIP ADDITIVE FOR GL-5 GEAR OILS

Super S[®] Limited Slip is for Posi-Traction and Locking differentials, add up to 2 ounces per quart of either conventional or synthetic GL-5 gear oil. Prevents differentials from chattering and slipping, reduces differential noises, and improves gear oil performance. Suitable for GM 1052358, Ford M2C118-A, Chrysler 4318060 and most imports. Not for use in JEEP Quadra-Trac or Quadra-Drive.



SUPER S[®] MARINE OUTBOARD LOWER UNIT GEAR LUBE

Super S[®] Marine Outboard Lower Unit Gear Lube is a special API Service GL-5 80W-90 marine grade formulation designed to withstand high amounts of water contamination. It is fortified with stable extreme pressure (EP) additives and corrosion inhibitors to protect gears and bearings subject to water seepage. Anti-foam agents maintain lubrication even under the severe churning action experienced in lower unit.

PRODUCT	PACKAGING	PART #
SAE 90	3/1 Gal	SUS 91-3
	35 lb Pail	SUS 91
SAE 140	12/1 Qt	SUS 92-3
	3/1 Gal	SUS 92-1-3
	35 lb Pail	SUS 92

(Products are also available in Totes for SAE 80W-90 GL-4)

PRODUCT	PACKAGING	PART #
SAE 90	12/1 Qt	SUS 21-12
	3/1 Gal	SUS 21-3
	35 lb Pail	SUS 8
SAE 140	400 lb Drum	SUS 39
	12/1 Qt	SUS 22-12
	3/1 Gal	SUS 22-3
SAE 250	35 lb Pail	SUS 9
	400 lb Drum	SUS 9-55
	12/1 Qt	SUS 250
	3/1 Gal	SUS 251-3
	35 lb Pail	SUS 255

PRODUCT	PACKAGING	PART #
LS Additive	12/10 oz	SUS S 159

PRODUCT	PACKAGING	PART #
Lower Unit Gear Lube	12/10 oz	SUS 178



Super S[®] HYDRAULIC FLUIDS



SUPER S[®] PREMIUM UNIVERSAL TRACTOR HYDRAULIC FLUID

Super S[®] Premium Universal Tractor Hydraulic Fluid is a premium multi-functional fluid used as a hydraulic medium and as a transmission, differential, power steering, power brake, power take-off (PTO), and implement drive fluid. The superior detergent/dispersant package keeps systems cleaner for longer life, while frictional characteristics permit the wet brakes to hold properly and allows smooth engagement of power take-off (PTO) clutches.

FEATURES / BENEFITS

- Superior detergent/dispersant package keeps system cleaner for longer life
- Lubricates the transmission, differential and final drive gears in tractors and implements
- Provides extreme pressure (EP) and anti-wear protection
- Protects against rust, corrosion, foaming and oxidation
- Prevents seal and pump deterioration
- Protects tractor transmission, axles and hydraulic pumps
- Eliminates brake chatter
- Controlled frictional characteristics permit the wet brakes to hold properly and allows smooth engagement of power take-off (PTO) clutches.

PRODUCT	PACKAGING	PART #
Premium	3/1 Gal	SUS 236-3
Universal	3/2 Gal	SUS 236-2
Tractor	5 Gal	SUS 236
	55 Gal	SUS 236-55

Premium Universal Tractor Hydraulic Fluid has been field-tested and is suitable for use where any of the following fluids are recommended:

Allis Chalmers PF-821XL	John Deere J20, J20A (Hy-Gard), J20C, J14B, J14C, J20D
Caterpillar TO-2	303, Quatrol
Denison HF-0	Kubota UDT, UDT Super
Deutz HTF	Massey Ferguson, M-1110, M-1127, M-1129 (Permatran)
Ford /New Holland M2C41-B, M2C48-B	Oliver Type 55
M2C53-C, M2C77-A	Renk Doromat ATF
M2C86-B, ESN-M2C134	Steiger Hydraulic Trans Fluid
M2C134-B, M2C134-C	Sunstrand HMS-103
M2C134-D	Versatile Gear/Hydraulic Trans Fluid
International Harvester Hy-Tran, spec. B-6	White Q1722, Q1826
JI Case/David Brown JIC-143, 144, 145, 185	MS-1206 (Powergard PTF)
MS-1204, 1205	
MS-1209, MS-1210 (TCH)	

Super S® PREMIUM HYDRAULIC FLUIDS



SUPER S® PREMIUM UNIVERSAL TRACTOR HYDRAULIC FLUID - J20D

Super S® Premium Universal J20D Tractor Hydraulic & Transmission Fluid is a premium, low viscosity hydraulic medium which can be used as a transmission, differential, power steering, power brake, power take-off (PTO), and implement drive fluid. It meets or exceeds John Deere J20D and J21A performance specifications and is suitable for use in most farm and industrial tractors specifying a multi-grade, low viscosity medium.

PRODUCT	PACKAGING	PART #
J20D	5 GAL	SUS 273-5



SUPER S® SUPERDRAULIC™ AW HYDRAULIC FLUID

Super S® SuperDraulic™ Premium AW Hydraulic Fluid is an extended drain, heavy-duty anti-wear hydraulic oil formulated with high VI paraffinic base oils and an advanced additive package to provide superior oxidation and thermal stability for (ASTM D-943) 5000+ hour service. It provides excellent water separation and demulsibility, and is specially formulated to suppress foaming while also allowing rapid air release, improving hydraulic system performance and helping to prevent pump cavitation. It protects system components from rust and corrosion. Extended service performance is realized with advanced oxidation inhibitors that minimize sludge and varnish deposits, and superior base oils that resist breakdown and maintain properties at higher operating temperatures.

PRODUCT	PACKAGING	PART #	
ISO 32	5 Gal	SUS 161	<i>(Products are also available in ISO 15, ISO 22, ISO 150, ISO 220, 5W-20 & 10W-30. Ask your sales rep for more information)</i>
	55 Gal	SUS 162	
ISO 46	5 Gal	SUS 164	
	55 Gal	SUS 163	
ISO 68	5 Gal	SUS 166	
	55 Gal	SUS 167	
ISO 100	55 Gal	SUS 169	



SUPER S® SUPERTRAC® TRACTOR HYDRAULIC FLUID - J20A

Super S® Super Trac® Tractor Hydraulic Fluid is designed to lubricate the transmission, differential and final drive gears in tractors and implements. It is a multi-functional fluid used as a hydraulic medium, and as a power steering, power brake, power take-off (PTO), and implement drive fluid. It is designed for use as a replacement fluid for the hydraulic, wet brake, and transmission requirements of equipment manufacturers where a product of this quality is recommended.

Warning: This product is not suitable for use in most equipment manufactured since 1989. Misapplication in newer equipment may cause unsatisfactory performance or equipment harm. For equipment built after 1989, use Super S® premium universal tractor hydraulic fluid (SUS 236) as a premium, multi-functional lubricant.

PRODUCT	PACKAGING	PART #
Super	3/1 Gal	SUS 352-3
Trac	3/2 Gal	SUS 352-2
J20A	5 Gal	SUS 352
	55 Gal	SUS 352-55



SUPER S® ANTI-WEAR HYDRAULIC FLUID

Super S® AW Hydraulic Oils are general purpose, antiwear, rust, corrosion and oxidation inhibited oils with an anti-foam additive. They are suitable for use where service requirements are normal to moderate and long term, heavy-duty wear protection is not critical. When used in the proper grade, Super S AW Hydraulic Oils may be used in circulation splash bath and ringed oil systems supplying bearings and gears. Anti-Wear Hydraulic Oil is formulated to meet: Sperry Vickers M-2950-S & I-286-S, Denison HF-0, HF-1 & HF-2, Cincinnati Milacron P-68, P-69 & P-70.

PRODUCT	PACKAGING	PART #
ISO 22	5 Gal	SUS 222
	55 Gal	SUS 222-55
ISO 32	3/1 Gal	SUS 36-3
	5 Gal	SUS 36
	55 Gal	SUS 37
ISO 46	3/1 Gal	SUS 38-3
	5 Gal	SUS 38
	55 Gal	SUS 63
ISO 68	3/1 Gal	SUS 40-3
	5 Gal	SUS 40
	55 Gal	SUS 43
ISO 100	5 Gal	SUS 100
	55 Gal	SUS 100-55



SUPER S® MINING HYDRAULIC OIL

Super S® Mining Hydraulic Oil is blended from well-refined base stocks to provide anti-wear lubricating properties primarily in mining applications. It is formulated with select additives to provide anti-rust and anti-oxidation performance. To meet requirements of the mining industry, this product is packaged in square metal cans.

PRODUCT	PACKAGING	PART #
ISO 68	35 lb Pail	SUS 40M
ISO 100	35 lb Pail	SUS 100M
ISO 150	35 lb Pail	SUS 150M



SUPER S® R & O HYDRAULIC OIL

Super S® R & O is a general purpose hydraulic oil that protects against rust, oxidation, corrosion and foaming in a wide variety of applications where service is light to moderate and anti-wear or extreme pressure properties are not required. Standard viscosity grade is ISO 32, with an ISO 68 option.

PRODUCT	PACKAGING	PART #
ISO 32	3/1 Gal	SUS 23-3
	5 Gal	SUS 1
	55 Gal	SUS 3
ISO 68	5 Gal	SUS 2
	55 Gal	SUS 2-55

(Products are also available in Totes for ISO 100)

Super S[®] GREASE



SUPER S[®] SUPER CS EP2 SYNTHETIC GREASE



Super S[®] Super CS is among the highest performance of multi-purpose greases, it is formulated with premium high VI (Viscosity Index) oils, performance additives and a Calcium Sulfonate extreme pressure (EP), synthetic based thickener. It is world renowned for its unequalled corrosion properties as well as its Extreme Pressure properties and shear stability. It is specifically formulated for severe service, extreme environment and marine applications, and off-road machinery. It exceeds the requirements of all NLGI EP2 grease applications. Meets requirements of NLGI GC-LB.

PRODUCT	PACKAGING	PART #
CS EP2	50/14 oz	SUS 202
	35 lb Pail	SUS 202-35
	120 lb Keg	SUS 202-120
		SUS 202-400

SUPER S[®] SUPER BLUE EP2 HI-TEMP GREASE



Super S[®] Super Blue is a 12-HSA high performance, extreme pressure (EP), multi-purpose grease formulated for demanding high temperature applications dropping point exceeds 500°F. Super S[®] Super Blue EP2 reduces friction with a unique formulation that adheres to metallic surfaces (versus plating out) to reduce the highly localized heating and wear of metal surfaces. It is fortified with extra EP additives to withstand extreme loading and shock loads. Exceeds the latest equipment requirements. Meets requirements of NLGI GC-LB.

PRODUCT	PACKAGING	PART #
Blue EP2	50/14 oz	SUS 201
	35 lb Pail	SUS 201-35
	120 lb Keg	SUS 201-120
		SUS 201-400

SUPER S[®] SUPER MOLY EP2 GREASE



Super S[®] Super Moly is a 12-HSA high performance NLGI#2 multi-purpose grease provides additional wear protection under extreme/severe loads with enhanced extreme pressure (EP) and film properties, and outstanding high temperature performance with a dropping point in excess of 500°F. It is fortified with molybdenum disulfide which reduces the coefficient of friction, protects against localized heating and wear of metal surfaces and provides exceptional film strength, making it especially good for shock loads and low speed, heavy load applications such as in heavy construction and earth moving equipment. Meets requirements of NLGI GC-LB.

PRODUCT	PACKAGING	PART #
Moly EP2	50/14 oz	SUS 203
	35 lb Pail	SUS 203-35
	120 lb Keg	SUS 203-120



SUPER S® SUPER MP2 GRAPHITE GREASE

Super S® Super MP2 is a graphite fortified multi-purpose 12-HSA NLGI #2 lithium grease that exhibits good mechanical stability, rust inhibition and water resistance. Use where a heavy grease with solid lubricants is required. Super MP2 Graphite Grease has broad application and may be more suitable for use in many cases than dry powered graphite or basic household oils. Meets requirements of NLGI GA-LA.

PRODUCT	PACKAGING	PART #
MP2 Graphite	50/14 oz	SUS 204



SUPER S® MARINE EP SYNTHETIC GREASE

Super S® Marine is a high performance Synthetic Extreme Pressure (EP) NLGI Grade #2 Calcium Sulfonate grease developed for Marine and other applications needing severe service properties and/or a high resistance to washout, water, moisture, rust and corrosion, including saltwater. It demonstrates exceptional anti-wear and extreme pressure properties, oxidation and shear stability, and provides outstanding low and high temperature performance. It will help to maximize component life. Meets requirements of NLGI GC-LB.

PRODUCT	PACKAGING	PART #
Marine	18/3 oz	SUS 205-03
	50/14 oz	SUS 205



SUPER S® HI-TEMP RED #2 EP LITHIUM GREASE

Super S® Hi-Temp Red is a 12-HSA premium NLGI#2 extreme pressure (EP), multi-purpose, lithium complex grease that provides outstanding high temperature performance and excellent lubrication over a wide temperature range and a variety of services including heavy duty fleet, automotive, farm and industrial applications.

Super S® Hi-Temp Red provides excellent water resistance, rust and corrosion protection, and oxidation resistance. It provides wear protection under extreme loads, resists separation, and resists softening due to heat. The Lithium Complex thickener gives it a dropping point in excess of 500 °F. Meets requirements of NLGI GC-LB.

PRODUCT	PACKAGING	PART #
Hi-Temp Red	10/14 oz	SUS 67-10
	50/14 oz	SUS 67
	12/1 lb	SUS 77
	6/4 lb	SUS 67-4
	35 lb Pail	SUS 71
	120 lb Keg	SUS 70
	400 lb Drum	SUS 78

PRODUCT	PACKAGING	PART #
Multi Purpose	18/3 oz	SUS 66-03
	10/14 oz	SUS 66-10
	50/14 oz	SUS 66
	12/1 lb	SUS 66-1
	35 lb Pail	SUS 68
MP2 RED	120 lb Keg	SUS 69
	400 lb Drum	SUS 79
	50/14 oz	SUS 66-14
	12/1 lb	SUS 66-12
	35 lb Pail	SUS 66-35
MP2 AMBER	120 lb Keg	SUS 66-120
	400 lb Drum	SUS 66-400
	50/14 oz	SUS 68-14
	12/1 lb	SUS 68-12
	35 lb Pail	SUS 68-35
	120 lb Keg	SUS 68-121



SUPER S® MULTI-PURPOSE #2 (MP2) LITHIUM GREASE

Super S® MP2 is a NLGI#2 lithium based, water resistant grease for automotive and light to medium trucks, farm and industrial applications. It is recommended for automotive chassis lubrication points, ball joints and universal joints. It resists softening at high operating temperatures, seals out dirt and moisture contamination, is formulated with rust and oxidation inhibitors, and offers good stability over its operating range. Super S® MP2 provides excellent water resistance, is shear stable and provides good anti-wear protection. Meets requirements of NLGI GB.

Super S® GREASE



SUPER S® “000” RED LITHIUM GREASE

Super S® “000” is an economical, light duty lithium thickened NLGI “000” grease for general use, including applications where lubricant retention is a problem. Fluid at lower temperatures, pourable at room temperature, 000 grease is shear stable, has moderate EP properties, and provides good water resistance.



SUPER S® “00” COTTON PICKER SPINDLE GREASE

Super S® “00” is a smooth textured, corrosion preventive NLGI 00 lithium grease based upon the best time-tested formulations specifically developed for lubricating modern cotton picker spindle assemblies. It is manufactured with a special low viscosity, low pour point base oil to provide low friction, excellent penetration, full protection and efficient operation in both hot and cold weather.



SUPER S® COTTON PICKER SPINDLE CLEANER

Super S® Cotton Picker Spindle Cleaners is a top quality oil emulsion based upon the time-tested formulation specifically developed for cleaning modern cotton picker spindles. Super S® Spindle Cleaner is a water soluble oil-based liquid that mixes well with water of any hardness and cleans dirt, plant materials, and other foreign contaminants from cotton picker spindles. It applies a protective film as it washes the spindle and is compatible with spindle grease. It won't wash spindle grease out of the critical areas it's lubricating, but will still coat those parts to protect them. It also keeps moisture pads from drying out and hardening, and helps to keep doffers in good condition.

SUPER S® POST TENSION GREASE

Super S® Post Tension Grease is premium 12-HSA lithium based grease specially formulated for the Post Tensioning construction industry. It exceeds the post Tensioning Institutes (PTI) specifications for corrosion protection of unbonded and single-bonded tendons in corrosive service. Graded to a NLGI 1.5 consistency and fortified with a robust corrosion inhibitor package which exhibits superb protection against oxidation.

Super S® Post Tension Grease is recommended for:

- Preserves metallic cables and wires exposed to corrosive environments.
- Preserves steel reinforcement bars or rods used for concrete structures against corrosion.
- Recommended for use in marine and construction industries.

PRODUCT	PACKAGING	PART #
“000” Red Lithium	35 lb Pail	SUS 120
	400 lb Drum	SUS 120-400

PRODUCT	PACKAGING	PART #
“00”	12/1 Qt	SUS 111
	35 lb Pail	SUS 114
	120 lb Keg	SUS 116
	400 lb Drum	SUS 117

PRODUCT	PACKAGING	PART #
Spindle Cleaner	5 Gal	SUS 123
	55 Gal	SUS 124

PRODUCT	PACKAGING	PART #
Tension	Tote	SUS 700-400
	Bulk	SUS 206 Bulk

Super S[®] INDUSTRIAL OILS



SUPER S[®] WIRESEAL

Super S[®] WireSeal corrosion inhibitors contain a specially blended combination of corrosion inhibitors, H₂S inhibitors, anti-oxidant and anti-wear additives for reducing friction and keeping Wireline wear down to a minimum thus providing maximum protection to the line even under the most severe operating environments. The excellent adhesive properties associated with these products reduce splatter or drip on nearby equipment and will prevent the loss of well condensate and gasses during wireline operations.

PRODUCT	PACKAGING	PART #
WireSeal 680	Tote	SUS.WSCI680.1275.D66
WireSeal 1500	Tote	SUS.WSCI1500.1275.D67
WireSeal 2500	Tote	SUS.WSCI2500.1275.D68

SUPER S[®] PREMIUM R & O TURBINE OIL

Super S[®] Premium R&O is a premium rust and oxidation inhibited formulation of paraffinic base oils blended with a carefully balanced additive system to achieve a combination of excellent water demulsibility, oxidation stability, and air release. Super S[®] Premium R&O Turbine Oils are designed for long life service protecting against system rusting caused by water contamination, and against sludge and deposits caused by oil oxidation. Available in viscosity grades ISO VG22 to ISO VG320.



PRODUCT	PACKAGING	PART #
Turbine 32	5 Gal	SUS 61
	55 Gal	SUS 62
Turbine 46	5 Gal	SUS 15
	55 Gal	SUS 47
Turbine 68	5 Gal	SUS 13
	55 Gal	SUS 14

SUPER S[®] CHERRY PICKER OIL

Super S[®] Cherry Picker Oil surpasses the minimum dielectric strength specification of 25kV making it suitable for use in high voltage electric service vehicles. Super S[®] Cherry Picker Oil is a premium high dielectric strength, high VI (viscosity index) anti-wear hydraulic oil developed for dependable performance in mobile, marine and industrial equipment, aerial platforms (man lifts) and bucket trucks, and emergency and electric service vehicles.



PRODUCT	PACKAGING	PART #
CPicker 22	5 Gal	SUS 230
CPicker 32	5 Gal	SUS 232
	55 Gal	SUS 232-55
CPicker 68	5 Gal	SUS 233

Super S[®] INDUSTRIAL OILS



SUPER S[®] SAWGUIDE OIL

Super S[®] Saw Guide Oil is formulated with premium base stocks and additive with tackifier for excellent rust and corrosion protection. The premium fluid creates a boundary layer between the blade and guide reducing friction and heat while protecting critical components of the operation.



SUPER S[®] SOLUBLE OIL B

Super S[®] Soluble Oil B is an emulsifying oil that readily mixes with water, forming an homogeneous and exceptionally stable emulsion. It is used in the machining of both ferrous and nonferrous metals, particularly when cutting with carbon or high speed steel or tungsten carbide tools.



SUPER S[®] QUENCH OIL

Super S[®] Quench Oils are formulated with paraffinic base oils and a specialty additive designed for use during the heat treating of steel. This formulation results in excellent wetting ability and outstanding cooling capacity during the quench process.



SUPER S[®] WAYLUBE OIL

Super S[®] Waylube Oil are formulated for the unique lubrication requirements of slides and ways. They protect the slides and ways by providing excellent adhesion and metal wetting, load carrying capability, oxidation and thermal stability and corrosion resistance.



SUPER S[®] HEAT TRANSFER OIL

Super S[®] Heat Transfer Oils are blended from high quality base stocks. They should be used whenever the application requires excellent product stability, oxidation and heat transfer properties are required.



SUPER S[®] DRIP OIL

Super S[®] Drip Oils utilize premium paraffinic base stocks and are clear, to a slight straw color. They are recommended for use on vertical shaft driven pumps equipped with a drip oiler. They are free of harmful additives, and their high viscosity index allows consistent flow with temperature variation.



SUPER S[®] LOW ASH GAS ENGINE OIL

Super S[®] Low Ash Gas Engine Oils are premium, low ash engine oils recommended for high output four –cycle engines. Formulated from high VI base stocks and additive package, they provide superior levels of detergency and deposit control for the demanding requirements of these engines. Additionally they contain anti-wear additive and antioxidants leading to long service life.



SUPER S[®] ASHLESS GAS ENGINE OIL

Super S[®] Ashless Gas Engine Oils are premium ashless engine oils proven to be an exceptional performer during years of field service throughout North America in 2-stroke and selected 4-stroke engines. It is based on an exclusive ashless formulation to help prevent combustion chamber deposits, exhaust port blockage and spark plug fouling.

PRODUCT	PACKAGING	PART #
Sawguide Oil 100	55 Gal	SUS 194

(Also available in 150, ask your sales rep for more information)

(Products are also available in Totes & Bulk)

PRODUCT	PACKAGING	PART #
Quench Oil	Bulk	SUS 193 Bulk

PRODUCT	PACKAGING	PART #
ISO 68	55 Gal	SUS 192-55
ISO 220	55 Gal	SUS 194-55

PRODUCT	PACKAGING	PART #
ISO 32	Bulk	SUS 182 Bulk
ISO 46	Bulk	SUS 146 Bulk

PRODUCT	PACKAGING	PART #
Drip Oil	3/2 Gal	SUS 196
	5 Gal	SUS 36 DO
	55 Gal	SUS 37 DO

PRODUCT	PACKAGING	PART #
Low Ash 40	55 Gal	SUS 183-55

(More products available. Ask your sales rep for more information)

PRODUCT	PACKAGING	PART #
Ashless SAE 40	55 Gal	SUS 200-55

(More products available. Ask your sales rep for more information)

(All these products are also available in Totes & Bulk)



SUPER S® ROCK DRILL OIL

Super S® Rock Drill Oils are extreme pressure lubricants designed for the lubrication of air powered tools, such as jack hammers, rock drills, pneumatic construction and mining equipment under both wet and dry conditions. Super S® Rock Drill Oils have outstanding stability, adhesiveness, and excellent load-carrying capacity. They contain rust and oxidation inhibitors, EP additives, and a tackifier agent that protects the critical components of the tools. Super S® Rock Drill Oils are non-corrosive to both ferrous and nonferrous metals.



SUPER S® DAIRY VACUUM PUMP OIL

Super S® Dairy Vacuum Pump Oil features premium base oils with low volatility characteristics. In formulation with proven high-quality anti-wear additives for the lubrication of dairy vacuum pumps. This oil is designed to help provide as extended life with maintained viscosity while preventing oxidation, sludge, and deposits.



SUPER S® SYNTHETIC BLEND SAE 30 COMPRESSOR OIL

Super S® Compressor Oil is formulated for use in the crankcase of reciprocating air compressors operating in a broad range of operational environments. When used on the valve side, it provides a clean crankcase and properly operating valves, rings, and cylinders. It also has shown acceptable performance in rotary, flooded vane, and screw compressors.



SUPER S® ROTARY PISTON/VACUUM PUMP OIL

Super S® Rotary Piston Vacuum Oil is formulated with high quality base oils, resulting in a low vapor pressure, chemically stable fluid, that is unreactive with most gases and materials. It is recommended for use in most vacuum pumps where high vacuums are required.



SUPER S® TRANSFORMER OIL

Super S® Transformer Oil is an electrical insulating oil produced from severely hydroprocessed naphthenic base oils to meet the specifications defined in ASTM D 3487. They do not contain corrosive sulfur or polychlorinated biphenyls (PCBs). The specialized formula insures high electrical resistance, while the low viscosity and pour point provides excellent conductive heat transfer. It is formulated with an oxidation inhibitor to minimize formation of acids and sludge in service to minimize oil deterioration and extend the operating life of the immersed components.



SUPER S® CONCRETE FORM OIL

Super S® Concrete Form Oil is used to prevent bonding between concrete surface and forms, both wood and steel. Because bonding is eliminated, stripping is easier resulting in extended form life. The oil also provides protection from rust on steel forms. Super S® Concrete Form Release Oil is non-staining for most types of aggregates.



SUPER S® EP GEAR COMPOUND

Super S® EP Gear Compounds are heavy duty EP (extreme pressure) gear lubricants (GL-4) formulated for use in industrial gear sets, bearings, circulating systems and gear reducers. They protect gears and bearings by providing excellent load carrying capability, water demulsibility, oxidation stability and corrosion resistance. Provides excellent performance in high load and/or extreme temperature operations.

PRODUCT	PACKAGING	PART #
ISO 68	55 Gal	SUS 190
ISO 100	5 Gal	SUS 309
	55 Gal	SUS 310

(More products are also available. Please contact your sales rep for more information)

PRODUCT	PACKAGING	PART #
Diary	3/1 Gal	SUS 101-5
Vac Pump	5 Gal	SUS 101-3

PRODUCT	PACKAGING	PART #
Compressor Oil	6/1 Qt	SUS 727

PRODUCT	PACKAGING	PART #
Rotary/ Vac Pump	5 Gal	SUS 89

PRODUCT	PACKAGING	PART #
Transformer	55 Gal	SUS 235-55

PRODUCT	PACKAGING	PART #
Concrete Form Oil	55 Gal	SUS 195

PRODUCT	PACKAGING	PART #
ISO 150	400 lb Drum	SUS 151
ISO 220	35 lb Pail	SUS 152-5
	400 lb Drum	SUS 152
ISO 320	400 lb Drum	SUS 153
ISO 460	35 lb Pail	SUS 154-5

(All these products are also available in Totes & Bulk)

Super S[®] ANTIFREEZE & COOLANT



SUPER S[®] EXTENDED LIFE HEAVY DUTY TRUCK ANTIFREEZE & COOLANT

Super S[®] Extended Life Heavy Duty Truck Antifreeze and Coolant is a heavy duty diesel formula and contains advanced supplemental cooling additives (SCA) which protect your complete cooling system while improving performance, reducing maintenance and lowering overall costs.

PRODUCT	PACKAGING	PART #
Extended	6/1 Gal	SUS 289
Life HD	55 Gal	SUS 289-55

(Red)



SUPER S[®] EXTENDED LIFE 50/50 HEAVY DUTY TRUCK ANTIFREEZE & COOLANT

Super S[®] Extended Life 50/50 Heavy Duty Truck Antifreeze and Coolant meets the same specifications and gives the same protection as Super S[®] Extended Life Heavy Duty Truck Antifreeze and Coolant. It is mixed with a 50% water concentration for ease of application and cleanliness.

PRODUCT	PACKAGING	PART #
Extended	6/1 Gal	SUS 290
Life HD	55 Gal	SUS 290-55

50/50 (Red)



SUPER S[®] EXTENDED LIFE ANTIFREEZE & COOLANT

Super S[®] Extended Life Antifreeze & Coolant is a new generation of antifreeze technology that can be used to upgrade any automobile or light truck cooling system to a remarkable 150,000 miles—5 years of protection. Extended Life Antifreeze is compatible with conventional antifreeze, but may reduce its characteristics to conventional antifreeze levels and is not recommended by manufacturers. Super S[®] Extended Life Antifreeze should be mixed to a 50% water concentration.

PRODUCT	PACKAGING	PART #
Extended	6/1 Gal	SUS 265
Life	55 Gal	SUS 266

(Orange)



SUPER S[®] 50/50 PREDILUTED EXTENDED LIFE ANTIFREEZE & COOLANT

Super S[®] 50/50 Prediluted Extended Life Antifreeze & Coolant meets the same specifications and gives the same protection as Super S[®] Extended Life Antifreeze & Coolant. It is mixed with a 50% water concentration for ease of application and cleanliness.

PRODUCT	PACKAGING	PART #
50/50 AF	6/1 Gal	SUS 267
(Orange)	55 Gal	SUS 266-50



SUPER S[®] UNIVERSAL ANTIFREEZE & COOLANT

Super S[®] Universal Antifreeze and Coolant is recommended for most conventional automotive and diesel engines and is compatible with all premium quality cooling system products regardless of make, model or original antifreeze color including green, yellow, orange, fuchsia, blue or red.

PRODUCT	PACKAGING	PART #
Universal	6/1 Gal	SUS 285
AF (Yellow)	55 Gal	SUS 285-55



SUPER S® 50/50 PREDILUTED UNIVERSAL ANTIFREEZE & COOLANT

Super S® 50/50 Prediluted Universal Antifreeze and Coolant meets the same specifications and gives the same protection as Super S® Universal Antifreeze and Coolant. It is mixed with a 50% water concentration for ease of application and cleanliness.



SUPER S® FULL STRENGTH ANTIFREEZE & COOLANT

Super S® Full Strength Antifreeze/Coolant is an ethylene glycol base antifreeze containing inhibitors providing protection from freezing, overheating, rust and corrosion when used as recommended. It protects all cooling system metal surfaces including aluminum. It will not damage auto finishes or rubber parts.



SUPER S® 50/50 ANTIFREEZE & COOLANT

Super S® 50/50 Antifreeze & Coolant meets the same specifications and gives the same protection as Super S® Antifreeze. It is mixed with a 50% water concentration for ease of application and cleanliness.



SUPER S® FLEET ANTIFREEZE & COOLANT

Super S® Fleet Antifreeze & Coolant is formulated to provide optimum protection against freezing, boil over, cavitations, erosion, corrosion, and scale for all heavy-duty cooling system applications. It is SCA pre-charged, therefore it requires no SCA at initial fill, and insures proper



SUPER S® 50/50 PREDILUTED FLEET ANTIFREEZE & COOLANT

Super S® 50/50 Prediluted Fleet Antifreeze & Coolant meets the same specifications and gives the same protection as Super S® Fleet Antifreeze & Coolant. It is mixed with a 50% water concentration for ease of application and cleanliness.



SUPER S® RV & MARINE ANTIFREEZE

Super S® RV & Marine Antifreeze is formulated for use in potable water plumbing systems which include, recreational vehicles, trailers, marine, swimming pools and spas, and vacation homes. It provides full protection to -50°F. Slush may appear at 0°F and, as temperature rises, will eventually disappear. Super S® RV & Marine Antifreeze provides corrosion protection and is compatible with brass, copper and other metal and plastic pipes (except acetate).

PRODUCT	PACKAGING	PART #
Universal 50/50 (Yellow)	6/1 Gal	SUS 286
	55 Gal	SUS 285-50

PRODUCT	PACKAGING	PART #
Antifreeze (Green)	12/1 Qt	SUS 165
	6/1 Gal	SUS 65
	55 Gal	SUS 72

PRODUCT	PACKAGING	PART #
Premix 50/50 (Green)	12/1 Qt	SUS 80-12
	6/1 Gal	SUS 80
	55 Gal	SUS 80-55

PRODUCT	PACKAGING	PART #
Fleet AF (Green)	6/1 Gal	SUS 275
	55 Gal	SUS 276

PRODUCT	PACKAGING	PART #
Fleet 50/50 AF (Green)	55 Gal	SUS 276-50

PRODUCT	PACKAGING	PART #
RV & Marine	1 Gal	SUS 278
	55 Gal	SUS 278-55

SUPER FUEL™



SUPER S® SUPERFUEL 40:1 2-CYCLE OIL & FUEL

Super S® SuperFuel 40:1 is made with premium synthetic oil and high octane fuel to provide the performance and protection that outdoor power equipment users have been wanting.

PRODUCT	PACKAGING	PART #
40:1 2-Cycle Oil & Fuel	32 oz Gal	SUS S204 SUS S205



SUPER S® SUPERFUEL 50:1 2-CYCLE OIL & FUEL

Super S® SuperFuel 50:1 is made with premium synthetic oil and high octane fuel to provide the performance and protection that outdoor power equipment users have been wanting.


PRODUCT	PACKAGING	PART #
50:1 2-Cycle Oil & Fuel	32 oz Gal	SUS S200 SUS S201



SUPER S® SUPERFUEL 4-CYCLE FUEL

Super S® SuperFuel is made with premium high octane fuel to provide the performance and protection that outdoor power equipment users have been wanting. Does not oxidize like typical gasoline. Super S® Super Fuel contains no ethanol preventing downtime and repairs to your internal engine parts.


PRODUCT	PACKAGING	PART #
4-Cycle Fuel Ready to Use	32 oz Gal	SUS S202 SUS S203



Trimmers




Chainsaws



Blowers



Generators



Lawnmowers

Super S[®] SMALL ENGINE OIL



Jet Ski



SUPER S[®] SUPERSYN™ FULL SYNTHETIC UNIVERSAL 2-CYCLE ENGINE OIL

Super S[®] SuperSyn™ Full Synthetic Universal 2-Cycle Engine Oil is a premium quality, high performance formulation of 100% synthetic base oils and a sophisticated additive package that meets or exceeds the performance, protection and service requirements for ashless, high flash 2-cycle engine oil for use in modern, high performance water cooled and air cooled two stroke cycle engines.

PRODUCT	PACKAGING	PART #
2-Cycle Engine Oil	12/3.2 oz	SUS 18-32

Motorcycles



SUPER S[®] SUPERSYN™ 2-CYCLE FULL SYNTHETIC ENGINE OIL WITH ETHANOL & FUEL STABILIZER

Super S[®] SuperSyn™ 2-Cycle Full Synthetic Engine Oil with Ethanol & Fuel Stabilizer is formulated to protect engines and fuel systems against deposits, rust and corrosion. It is used to treat fuel for long term storage and can be used in gas cans, tanks, cars, trucks, boats, ATVs, snow mobiles, lawn mowers, snow blowers, chain saws, generators, and most 2- or 4-stroke gasoline-fueled engines.

PRODUCT	PACKAGING	PART #
2-Cycle w/Treatment	12/2.6 oz	SUS 18-26

Snow Mobiles



SUPER S[®] SUPERSYN™ SYNTHETIC OUTBOARD 2-CYCLE MARINE OIL

Super S[®] SuperSyn™ Outboard 2-Cycle Marine Oil is a full synthetic, high-flash, ashless 2-cycle engine oil formulated to meet the requirements of most modern 2-cycle outboard and snowmobile high RPM engines. It is formulated for use in both premix and oil injected systems. SuperSyn™ Outboard is especially designed for exceptional performance in marine applications. It meets the warranty and service recommendations of most leading 2-cycle outboard motor manufacturers where TC-W3 oil is specified.

PRODUCT	PACKAGING	PART #
Syn. Outboard	24/16 oz	SUS 277-16
2 Cycle	12/1 Qt	SUS 277
	3/1 Gal	SUS 277-3
	55 Gal	SUS 277-55

ATVs



Outboard Motors



SUPER S[®] TC-W3 PREMIUM OUTBOARD MULTI-PURPOSE 2-CYCLE OIL

Super S[®] TC-W3 is a high performance, 2-cycle engine oil meeting or exceeding the warranty requirements of all leading manufacturers. 2-cycle products include chain saws, lawn mowers, motorcycles, string trimmers, as well as outboard engines made by Johnson/Evinrude, Mercury Marine, Yamaha, Suzuki, Nissan, Force/U.S. Marine, Mariner, Sears, and all other manufacturers requiring TC-W3 oil.

PRODUCT	PACKAGING	PART #
TC-W3 Outboard	24/16 oz	SUS 175
Outboard	12/1 Qt	SUS 176
	3/1 Gal	SUS 177-3
	55 Gal	SUS 179

Super S® SMALL ENGINE OIL



SUPER S® 2-CYCLE MIXING OIL

Super S® Universal 2-Cycle Engine Oil is formulated with high quality base oils and additives designed to provide excellent anti-scuff, anti-wear, rust and corrosion protection. It burns clean and protects all bearings during high RPM use.

PRODUCT	PACKAGING	PART #
Univ. 2 Cycle	48/3.2 oz	SUS 81
	18/3.2 oz	SUS 81-18
	24/3.2 oz	SUS 81-6
Mixing Oil	24/8 oz	SUS 18
	4/16 oz	SUS 18-16C
	24/16 oz	SUS 18-16



SUPER S® FUEL STABILIZER 2 & 4-CYCLE TREATMENT

Super S® Fuel Stabilizer 2 & 4-Cycle Treatment utilizes a combination of additives to protect against deposits, rust and corrosion in engines, and protects against gum and varnish formation in fuel systems. It can be used in 2- and 4-cycle engines, such as automobiles, trucks, lawn mowers, chain saws, and generators. Super S® Fuel Stabilizer helps keep stored fuel fresh and ready to use when needed.

PRODUCT	PACKAGING	PART #
Fuel Stabilizer	24/2.6 oz	SUS S182
	12/12 oz	SUS S183



SUPER S® 4-STROKE LAWNMOWER OIL

Super S® Heavy Duty 4-Stroke Lawnmower Oil is a premium formulation for use in all four stroke engines. Providing protection by lubricating, cooling, cleaning, and sealing internal moving parts. For use in outdoor power equipment such as lawnmowers, tractors, generators, tillers, pumps and edgers. Formulated to meet or exceed performance where API SJ is recommended.

PRODUCT	PACKAGING	PART #
SAE 30	24/20 oz	SUS 377
	8/48 oz	SUS 379
10W-30	12/1 Qt	SUS 378



SUPER S® SYNTHETIC SNOW THROWER 4-CYCLE 5W-30 ENGINE OIL

Super S® Synthetic Snow Thrower 4-Cycle SAE 5W-30 Engine Oil is a premium formulation for use in four-cycle engines in below freezing temperatures. It protects the engine by lubricating, cleaning deposits and sealing internal moving parts. It helps prevent wear and tear of the machinery. Pours smoothly in even the coldest of temperatures. For use in snow throwers, lawnmowers, tractors, and other outdoor power equipment. Formulated to meet or exceed performance where API SJ is recommended.

PRODUCT	PACKAGING	PART #
Synthetic Snow Thrower 5W-30	12/1 Qt	SUS 381



SUPER S® SNOW THROWER 4-CYCLE 5W-30 ENGINE OIL

Super S® Snow Thrower 4-cycle 5W-30 Engine Oil is formulated for use in four cycle engines operating below 32°F, such as 2-stage snow throwers. Its formula protects the engine through lubricating, cooling, and sealing internal parts while allowing the snow thrower to operate in colder temperatures.



SUPER S® 4-STROKE MOTORCYCLE/ATV ENGINE OIL

Super S® 4-Stroke Motorcycle/ATV Engine Oil is designed specifically for High RPM and High Temperature applications to provide maximum performance and protection for 4-stroke engines used in Motorcycles, ATVs and similar vehicles. It meets or exceeds the warranty requirements for all 4-stroke engines which recommend JASO (Japanese Automotive Standards Organization) MA/MA2 and/or API (American Petroleum Institute) SG, SH, SJ or SL service classification.



SUPER S® SUPERTAC EXTREME TAC BAR & CHAIN OIL

Super S® SuperTac Bar & Chain has all the great protection exhibited by Super S® Bar & Chain along with extra tackifier which provides for a more viscous product. It meets or exceeds the needs of residential, commercial and industrial chain saws, as well as, the needs of the forest product industry under the most adverse operating conditions.



SUPER S® BAR & CHAIN OIL

Super S® Bar & Chain Oil is a premium bar and chain lubricant designed to provide protection under all operating conditions. It is a combination of highly refined, thermally stable base stocks with natural solvency characteristics, and a non-water soluble “tackiness” agent resulting in a unique product that provides exceptional protection to the bar, chain, and sprockets.

PRODUCT	PACKAGING	PART #
Snow Thrower 5W-30	12/1 Qt	SUS 380

PRODUCT	PACKAGING	PART #
10W-40	12/1 Qt	SUS 127
	12/0.8 L	SUS 128
20W-50	12/1 Qt	SUS 125
	12/0.8 L	SUS 129

PRODUCT	PACKAGING	PART #
Bar & Chain	6/1 Qt	SUS 90-6
	3/1 Gal	SUS 20-3
	2/2.5 Gal	SUS 19
	55 Gal	SUS 191

PRODUCT	PACKAGING	PART #
SuperTac Bar & Chain	3/1 Gal	SUS 20X


Super S[®] AEROSOLS



SUPER S[®] NON-FLAMMABLE BRAKE PARTS CLEANER

A powerful solvent blend that easily removes brake fluid, grease, oil and dirt from brake parts.

NF B/P Cleaner 12/16 oz SUS S107



SUPER S[®] NON-CHLORINATED BRAKE PARTS CLEANER

A concentrated solvent that easily removes brake fluid, grease, oily dirt and contaminants from lining, pads and drums, cylinders and springs without disassembling the unit.

NC B/P Cleaner 12/15 oz SUS S102



SUPER S[®] CHOKE/CARBURETOR CLEANER

A powerful combination of concentrated solvents formulated to remove dirt, gum and varnish deposits that tend to build up. Cleans carburetor, choke and PCV valve.

Choke/
Carb Cleaner 12/10 oz SUS S101



SUPER S[®] PENETRATING OIL

A multi-purpose product formulated to lubricate, penetrate, displace moisture and prevent corrosion. Loosens and frees rusty parts.

Penetrating
Oil 12/10 oz SUS S104



SUPER S® STARTING FLUID

Helps start stubborn engines fast in cold weather and minimizes wear on batteries. For gasoline or diesel engines.

Starting Fluid 12/10.7 oz SUS S328



SUPER S® ENGINE DEGREASER

A water-based formula which combines the cleaning and degreasing of solvents, detergents and water into one powerful product that is low in VOCs.

Engine Degreaser 12/16 oz SUS S106



SUPER S® FLAT TIRE FIX - HOSE

Non-flammable, high pressure formulas helps to seal and inflate tires on passenger cars and light trucks.

Flat Tire Fix-Hose 12/13 oz SUS S324



SUPER S® FLAT TIRE FIX - CONE

Non-flammable, high pressure formulas helps to seal and inflate tires on passenger cars and light trucks.

Flat Tire Fix-Cone 12/12 oz SUS S325



SUPER S® DE-ICER

Removes frost and ice on contact. Ideal for windshield, windows, locks and mirrors. Harmless to car finishes.

De-Icer 12/12 oz SUS S332

Super S® TREATMENTS



SUPER S® OCTANE BOOSTER

Restores power and removes deposits that cause hesitation and stalling.

Octane Booster 6/12 oz SUS S118



SUPER S® OIL TREATMENT

A high efficiency lubricant that improves engine performance. Super S® Oil Treatment coats engine parts with a tough slippery film that resists heat and pressure. It keeps engine parts clean, improves viscosity, stops engine smoke and extends engine life. Helps stop oil burning.

Oil Treatment 6/15 oz SUS S105



SUPER S® FUEL INJECTOR TREATMENT

A super concentrated high strength detergent that provides enough cleaning power to restore carburetor and fuel injector to like new condition.

Fuel Injector Treatment 6/12 oz SUS S113



SUPER S POWER STEERING SEALER

Stops and prevents leaks occurring in the power steering fluid reservoir.

Power Steering Sealer 6/12 oz SUS S150





SUPER S® MOTOR FLUSH

Frees sticky valves and rings in only 5 minutes.

Motor Flush	6/12 oz	SUS S147
	55 Gal	SUS 725
	Tote	SUS 726



SUPER S® FUEL STABILIZER & ETHANOL TREATMENT

For All Gasoline Engines - Auto, Marine, Motorcycle, ATV, 2- & 4-cycle engines

- Treats fuel for Ethanol related problems
- Keeps fuel fresh and improves performance
- Prevents fuel deterioration
- Protects fuel system against gum, varnish, rust & corrosion
- Use to winterize fuel system and engine

Fuel Stabilizer/ Ethanol Treatment	6/12 oz	SUS S109
---------------------------------------	---------	----------



SUPER S® TRANSMISSION SEALER

Conditions and seals automatic transmissions.

Transmission Sealer	6/12 oz	SUS S151
------------------------	---------	----------



SUPER S® MOTOR SEALER

Stops oil leaks, including main seals.

Motor Sealer	6/12 oz	SUS S149
--------------	---------	----------



SUPER S® DIESEL CONDITIONER & ANTI-GEL

Improves flow, disperses water and prevents gelling.

Diesel Conditioner	6/12 oz	SUS S156
-----------------------	---------	----------



SUPER S® CARB & FUEL INJECTOR CLEANER

Restores lost power

- Increases gas mileage
- Reduces hesitation, rough idle and stalling

Carb/Injector Cleaner	6/12 oz	SUS S103
--------------------------	---------	----------



SUPER S® GAS TREATMENT

A powerful cleaner that restores carburetors and fuel injectors to like new condition. It dissolves gum and varnish, protects against corrosion, prevents fuel freeze-up and is registered with the EPA in accordance with regulations for fuel and fuel additives.

Gas Treatment	6/12 oz	SUS S108
---------------	---------	----------



SUPER S® LEAD SUBSTITUTE

A lead-free formula to protect engine values.

Lead Substitute	6/12 oz	SUS S154
-----------------	---------	----------

Super S[®] TREATMENTS



SUPER S[®] AIR TOOL OIL & JACK OIL

Super S[®] Air Tool Oil Designed for the upkeep of rotary and piston-type air tools.

Super S[®] Jack Oil For hydraulic jacks, service jacks and refillable shock absorbers. It blends with all original fluids.

PRODUCT	PACKAGING	PART #
Air Tool Oil	12/12 oz	SUS S148
Jack Oil	12/12 oz	SUS S146
	12/1 Qt	SUS S145



SUPER S[®] ETHANOL TREATMENT

Super S[®] Ethanol Treatment is a combination of additives designed to protect engines and fuel systems against deposits, rust and corrosion. Use for both immediate protection and long term storage on E-10, E-15 & E-85 fuels. Each bottle treats up to 21 Gallons. May be used with other Super S fuel additives.

PRODUCT	PACKAGING	PART #
Fuel Stabilizer	6/6 oz	SUS S110



SUPER S[®] OIL STABILIZER

Super S[®] Heavy Duty Oil Stabilizer when added to engine oil, is a high efficiency lubricant that will improve engine performance.

- Coats engine parts with a tough, slippery film that resists heat and pressure
- Keeps vital engine parts clean
- Improves Oil Viscosity
- Extends engine life
- Stops engine smoking
- Dramatically reduces exhaust smoke

PRODUCT	PACKAGING	PART #
Oil Stabilizer	12/1 Qt	SUS S180
	4/1 Gal	SUS S181

Super S[®] CLEANING PRODUCTS



SUPER S[®] SUPER POWER PURPLE DEGREASER

Super S[®] Super Power Purple De-greaser Removes dirt, grease, oil and tar. The industrial strength formula may be diluted to get the right strength for a multitude of applications. This powerful cleaner de-greaser easily separates, entraps and removes grease, dirt, oil and grime from almost every type of surface. It dilutes up to 1:20 with water.

PRODUCT	PACKAGING	PART #
Super Power	6/1 Qt	SUS S115
	3/1 Gal	SUS S120
	3/2 Gal	SUS S122
	5 Gal	SUS S125
	55 Gal	SUS S155



SUPER S[®] ALUMINUM BRIGHTENER

Super S[®] Aluminum Brightener cleans and brightens aluminum, stainless steel, copper, brass and non-metals. In just seconds the industrial strength formula dissolves grease, grime and road film.

PRODUCT	PACKAGING	PART #
Aluminum Brightener	4/1 Gal	SUS S408
	5 Gal	SUS S409



SUPER S[®] SUPER POWER CAR WASH

- Formulated especially for hand automobile washing
- Utilizes advanced surfactant technology
- Leaves a great shine
- Cuts through more dirt and grime
- Easily removes hard to clean bug residue
- Will never dull paint
- Great for all vehicles, especially those with exotic sensitive finishes
- Highly concentrated for greater economy

PRODUCT	PACKAGING	PART #
Car Wash	6/1 Qt	SUS 750
	3/1 Gal	SUS 751
	5 Gal	SUS 760

Super S® CLEANING PRODUCTS



SUPER S® SUPER POWER TRUCK WASH

- Heavy duty car wash for an extra powerful wash
- Formulated for tough action on stubborn dirt
- Deep cleansing wash with tar and bug remover
- Safe for all automotive finishes, including clear coats
- Won't strip wax or leave soapy residue

PRODUCT	PACKAGING	PART #
Truck Wash	6/1 Qt	SUS 752
	3/1 Gal	SUS 753
	5 Gal	SUS 761



SUPER S® SUPER POWER AUTO WASH & WAX

- Formulated to dissolve dirt and grime while waxing and leave a gloss shine
- Safe for all automotive finishes and bodywork
- Designed to save you time and effort
- Quick drying formulation allows water to run off the paint and glass surfaces, and reduces drying time
- Perfect for professional use

PRODUCT	PACKAGING	PART #
Auto Wash & Wax	6/1 Qt	SUS 754
	3/1 Gal	SUS 755
	5 Gal	SUS 762



SUPER S® SUPER POWER TIRE SHINE

Super Power Tire Shine provides exceptional cleaning to tires, resulting in a shiny, black new tire look. Super S® Tire Shine was formulated to provide an extra layer of protection allowing extended shine.

PRODUCT	PACKAGING	PART #
Tire Shine	6/1 Qt	SUS 758
	4/1 Gal	SUS 759
	5 Gal	SUS 764



SUPER S® SUPER POWER REAL WHITE

Super Power Real White is designed to clean and whiten tire white walls and lettering. Its formula helps restore the white luster of the white walls, and allows them to look their best over an extended period of time.

PRODUCT	PACKAGING	PART #
Real White	6/1 Qt	SUS 756
	4/1 Gal	SUS 757
	5 Gal	SUS 763



Sea-Wash®



Supers



SEA-WASH® SUPER 7

SEA-WASH® SUPER 7 is 100% concentrated product that has a neutral pH allowing to be used on sensitive surfaces. This concentrate can be diluted to your cleaning needs. SEA-WASH® Super 7 is designed as an all-purpose cleaner and used in floor cleaning equipment. The formulation allows owners of metal parts cleaning equipment to safely and efficiently clean dirt, mold, algae, oil, grease, and other soils from the surface of all metals, plastics, and other materials. Although metal will be exposed to the elements after the paint is removed, SEA-WASH® Super 7 will prevent the metal from rusting.

PRODUCT	PACKAGING	PART #
Sea-Wash	12/1Qt	SWA.CLEAN.1232.019
SUPER 7	5 Gal	SWA.CLEAN.1005.008
	55 Gal	SWA.CLEAN.1055.017



SEA-WASH® GLOBAL 11 CLEANER

SEA-WASH® GLOBAL 11 Cleaner is a revolutionary new concept in chemical cleaners for all phases of cleaning, dispersing, emulsifying, and herding of petroleum-based products. SEA-WASH® GLOBAL 11 is an industrial strength, highly concentrated, environmental safe cleaner. The product cleans mold, mildew, water-line scum, creosote, carbon dust, drilling muds, and cosmoline. It is also highly biodegradable, non-flammable, phosphate free and non-toxic.

PRODUCT	PACKAGING	PART #
Sea-Wash	6/1 Qt	SWA.DGRSR.1232.022
GLOBAL 11	4/1 Gal	SWA.DGRSR.0001.003
	5 Gal	SWA.DGRSR.1005.013
	55 Gal	SWA.DGRSR.1055.014



SEA-WASH® CITRUS CLEANER

SEA-WASH® Citrus Cleaner is a water based citrus cleaner and degreaser designed for use on most floors and other washable surfaces. SEA-WASH® Citrus Cleaner will not dull the floor finish. Not for use in food-processing areas. It is a low foaming product and may be used in buckets, spray bottles and automatic scrubbing machines. It removes most types of particulate and oily soils. It is environmental friendly, highly biodegradable, non-flammable, phosphate free and non-toxic.

PRODUCT	PACKAGING	PART #
Sea-Wash	6/1 Qt	SWA.CLEAN.6032.020
CITRUS	4/1 Gal	SWA.CLEAN.0001.021



SEA-WASH® SEA-CLEAR GLASS CLEANER

SEA-WASH® Sea-Clear Glass Cleaner is a streak-free solution for glass cleaning. This product is designed for use on windows, mirrors, tile, plastic, vinyl, aluminum, sealed granite and much more. Not for use in food-processing areas. Contains ammonia for excellent cleaning efficiency. It is environmentally safe, non-flammable, phosphate free, non-toxic and neutral pH.

PRODUCT	PACKAGING	PART #
Sea-Wash	6/1 Qt	SWA.CLEAN.6032.025
Sea-Clear		

**YOUR #1 SOLUTION
ON GREEN CLEANING!**

Super S[®] WINDSHIELD WASHER FLUID



SUPER S[®] ALL SEASON WINDSHIELD WASHER FLUID

- Streak-free with advanced beading technology
- Defeats bugs and pollen
- Eliminates snow and frost
- Effective at 0 F
- Water repellent
- Removes road grime

PRODUCT	PACKAGING	PART #
All Season	6/1 Gal	SUS 28-365



SUPER S[®] WINDSHIELD WASHER CONCENTRATE

Super S[®] Windshield Washer Concentrate is a powerful windshield washer fluid that can be mixed to desired concentration.

PRODUCT	PACKAGING	PART #
WW Conc.	12/12 oz	SUS S112
	24/16 oz	SUS S112-16
	55 Gal	SUS S112-55



SUPER S[®] EXTREME WINTER WINDSHIELD WASHER FLUID - 20°F

- Provides freeze protection to -20°F
- Helps remove frost, snow and ice in sub- zero temperatures
- Keeps windshields clean
- Improves visibility
- Does not harm paint, rubber or plastic
- Ideal for use in winter
- Dissolves road film and bug splatter

PRODUCT	PACKAGING	PART #
Extreme Winter	6/1 Gal	SUS 28-20
	55 Gal	SUS 28-20-55

Super S® WINDSHIELD WASHER FLUID



SUPER S® WINTER WINDSHIELD WASHER FLUID 0°F

- Provides freeze protection to 0°F
- Helps remove frost, snow and ice in sub- zero temperatures
- Keeps windshields clean
- Improves visibility
- Does not harm paint, rubber or plastic
- Ideal for use in winter
- Dissolves road film and bug splatter

PRODUCT	PACKAGING	PART #
Winter	6/1 Gal	SUS 28



SUPER S® SUMMER WINTER WINDSHIELD WASHER FLUID +21°F

- Summer season windshield washer solvent
- Dissolves road film and bug splatter
- Keeps windshields clean
- Improves visibility
- Does not harm paint, rubber or plastic

PRODUCT	PACKAGING	PART #
Summer	6/1 Gal	SUS 28-21



SUPER S® WINDSHIELD WASHER FLUID +32°F

- All season windshield washer solvent
- Dissolves road film and bug splatter
- Keeps windshields clean
- Improves visibility
- Does not harm paint, rubber or plastic
- Ideal for use in winter +32° or summer

PRODUCT	PACKAGING	PART #
+32°	6/1 Gal	SUS 28-32B



SUPER S® BUG WASH WINDSHIELD WASHER FLUID +32°F


- All season windshield washer solvent
- Dissolves road film and bug splatter
- Keeps windshields clean
- Improves visibility
- Does not harm paint, rubber or plastic
- Ideal for use in winter or summer

PRODUCT	PACKAGING	PART #
Bug Wash	6/1 Gal	SUS 28-32

Super S[®] DEF



TM




Attachment for 2.5 Gallon and 2 Gallon Containers

SUPER S[®] DEF

Super S[®] DEF is an American Petroleum Institute (API) certified Diesel Exhaust Fluid that meets international standards for purity and composition for use as a Nitrogen Oxide (NO_x) reducing agent in all Selective Catalytic Reduction (SCR) Emission Control systems. DEF is a reducing agent which is injected into the hot exhaust gas stream downstream of the diesel particulate filter. It vaporizes in the hot exhaust gas to form ammonia and carbon dioxide which then reacts with the SCR system catalytic converter and the NO_x (oxides of nitrogen) in the exhaust, converting the harmful NO_x emissions to harmless nitrogen and water. DEF meets ISO 22241-2 specifications and meets all applicable standards and specifications for use in all SCR systems. Non-Toxic, Non-Flammable, Non-Polluting.

PRODUCT	PACKAGING	PART #
DEF	3/1 Gal	SUS 160-3
	3/2 Gal	SUS 160-2
	2/2.5 Gal	SUS 160-2.5
	55 Gal	SUS 160-55
	275 Gal	SUS 160 TOTE

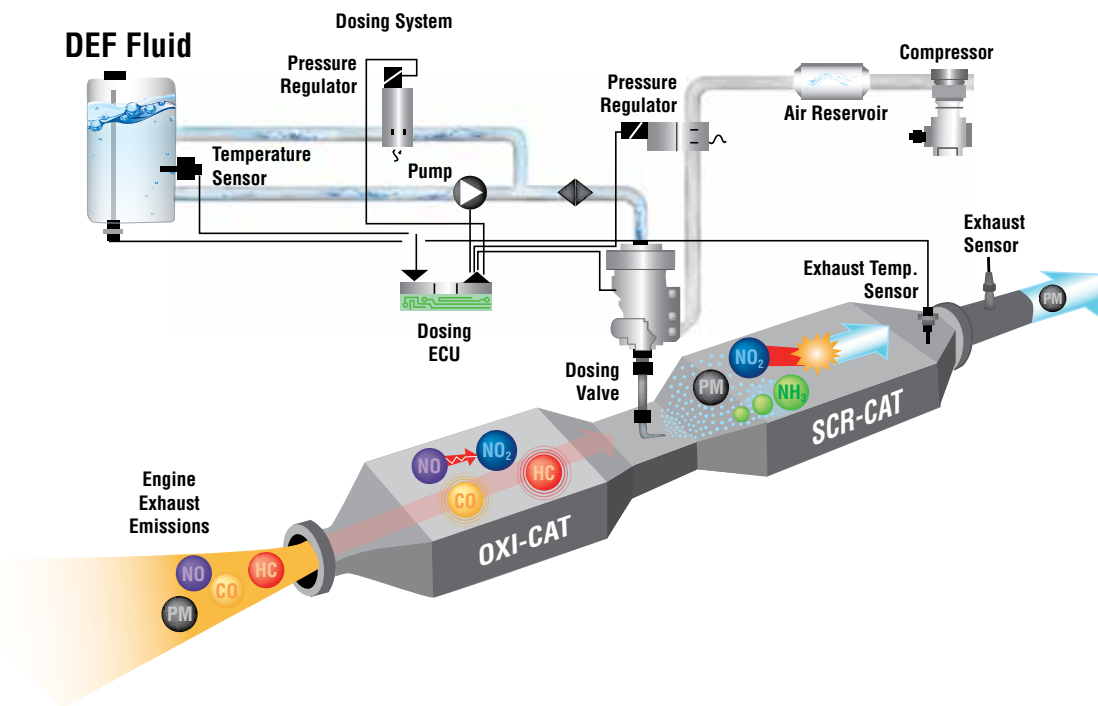



Super S® POWER STEERING & BRAKE FLUID



SUPER S® HONDA/ACURA POWER STEERING FLUID

Super S® Honda/Acura Power Steering Fluid is a premium synthetic power steering fluid specially formulated to meet the stringent requirements of Honda/Acura which require use of a technologically advanced fluid with more anti-wear protection, higher viscosity, and improved seal compatibility. Super S® Honda/Acura Power Steering Fluid is backwards compatible with older Honda/Acura power steering systems.

PRODUCT	PACKAGING	PART #
Honda/Acura Power Steering Fluid	12/12 oz	SUS 29H

SUPER S® PREMIUM POWER STEERING FLUID

Super S® Premium Power Steering Fluid is blended with a high quality base oil and a balanced additive package to provide oxidation stability, anti-foam, and seal/hose compatibility. Super S® Premium Power Steering Fluid contains a unique friction modifier additive that has been shown to reduce power steering pump noise (squeal). Recommended for complete fluid replacement in passenger cars, including Honda and Acura, and light trucks.



PRODUCT	PACKAGING	PART #
Premium Power Steering Fluid	12/12 oz	SUS 429L
	12/1 Qt	SUS 430

SUPER S® POWER STEERING FLUID

Super S® Power Steering Fluid is a carefully blended fluid providing excellent performance. Super S® Power Steering Fluid contains anti-wear additives to reduce wear on pistons, bearings and valves in modern power steering systems. Recommended for top off in passenger cars and light trucks.



PRODUCT	PACKAGING	PART #
Power Steering Fluid	12/12 oz	SUS 29L
	24/12 oz	SUS 29-24
	12/1 Qt	SUS 30
	3/1 Gal	SUS 129-3
	55 Gal	SUS 29-55

Super S® POWER STEERING & BRAKE FLUID



SUPER S® DOT 3 BRAKE FLUID

Super S® DOT 3 Brake Fluid is a fully approved, DOT 3 type motor vehicle brake fluid suitable for use in all vehicles where DOT 3 fluids are recommended. It is suitable for both disc and drum brake systems.

Meets or exceeds standards #116 SAE J1703 and ISO 4925.

PRODUCT	PACKAGING	PART #
DOT 3	12/12 oz	SUS 31
	24/12 oz	SUS 31-24
	12/1 Qt	SUS 32
	3/1 Gal	SUS 33-3
	5 Gal	SUS 34
	55 Gal	SUS 31-55



DOT 4® BRAKE FLUID

Super S® DOT 4 Brake Fluid surpasses specifications SAE J1704 and fully complies with Federal Motor Vehicle Safety Standard No. 116. Super S® Heavy Duty DOT 4 Brake Fluid is ideal for all types of automotive braking systems, disc or drum brakes. Operates efficiently under all weather conditions.

PRODUCT	PACKAGING	PART #
DOT 4	12/12 oz	SUS 431
	12/1 Qt	SUS 432
	55 Gal	SUS 433



SUPER S® DOT 5 BRAKE FLUID

Super S® DOT 5 Brake Fluid eliminates brake fade and protects from corrosion. It exhibits outstanding high and low temperature properties for reliable braking performance.

PRODUCT	PACKAGING	PART #
DOT 5	12/12 oz	SUS 531

Super S[®] SPECIALTY ITEMS



SUPER S[®] SOLVENT 140

Super S[®] Solvent 140 is a high flash point solvent used for general-purpose cleaning. With proper agitation in conventional cleaning equipment, it will effectively remove grease, lubricating oils and metal working fluids from metal surfaces. It replaces common low flash point solvents such as Stoddard solvents and mineral spirits. It is compatible with most metals and plastics.



SUPER S[®] MINERAL SPIRITS

Super S[®] Mineral Spirits satisfy the broad range of applications for Stoddard solvents and are refined to low odor levels. Super S[®] Mineral Spirits meet the general requirements for mineral spirits with solvent power and boiling range typical of a Stoddard solvent.



SUPER S[®] K-1 KEROSENE

Super S[®] K-1 Kerosene is a fuel K-1 kerosene ideally suited for use in kerosene burning heaters, lanterns and stoves. It meets or exceeds ASTM D 3699 standard for low-sulfur kerosene. It is also good for cleaning and removing grease, tar and oil.

PRODUCT	PACKAGING	PART #
Solvent 140	5 Gal	SUS 188
	55 Gal	SUS 189

PRODUCT	PACKAGING	PART #
Mineral Spirits	5 Gal	SUS 4
	55 Gal	SUS 5

PRODUCT	PACKAGING	PART #
K-1 Kerosene	5 Gal	SUS 186
	55 Gal	SUS 187

Super S[®] SPECIALTY ITEMS



SUPER S[®] SUPERDRY INDUSTRIAL ABSORBENT

Super S[®] SuperDry is a premium grade industrial absorbent product made of “Diatomite” (not clay). It works like a sponge. SuperDry absorbs oil, transmission fluid, brake fluid, radiator coolant, and more. SuperDry is used for control and containment of spills in the garage and workshop. It is easy to apply, lightweight, non-toxic, non-combustible and safe for landfills.

PRODUCT	PACKAGING	PART #
Super Dry	25 lb	SUS 46



SUPER S[®] CHARCOAL LIGHTER FLUID

Super S[®] Charcoal Lighter Fluid is a high quality fluid formulated for fast ignition. It is a low soot, no odor, no taste formula, excellent for grilling and igniting a fire in a controlled environment. Super S[®] Charcoal Lighter Fluid complies with South Coast Air Quality Management District Rule 1174 Ref. C56 or Ref. C65.

PRODUCT	PACKAGING	PART #
Charcoal	12/1 Qt	SUS S301
Lighter Fluid	12/16 oz	SUS S301-16



AND MORE TO COME!

Super S® Promotions

A wide variety of promotional pieces are available for marketing Super S® quality products. Visit smittysinc.net or contact your Super S® representative for further details.



Super S Hats
Multi-Flo, Custom Plus, SuperSyn, Super Trac and FG-2000.
One size fits all.



SUS PCMO/HDMO Poster
18" wide x 24" wide, single-sided,
Product Posters printed on
high quality #80 glossy paper.



Super S Racks
- Space Saver Rack
- 4 Shelf Metal Rack

T-shirts

SUS 50th Anniversary Grey Made with Muscle. Minimum order quantities may apply. Contact your local Super S sales representative for more information & pricing.



Floor Mats
15" x 17.75"



Super S Chapstick



Vinyl Banners

Super S Quality Vinyl Banners are 72" wide and 24" high, single-sided with hems and grommets.



Window Reminders

Super S Koozies



Super S Toothpicks

Super S[®] Licenses & Approvals



LICENSED PRODUCT			
SUPER S [®] DOT3 BRAKE FLUID	BF REGISTRATION	ALABAMA	100D4
SUPER S [®] DOT4 BRAKE FLUID	BF REGISTRATION	ALABAMA	100D4
SUPER S [®] DOT4 BRAKE FLUID	BF REGISTRATION	COLORADO	BF042-13
SUPER S [®] DOT3 BRAKE FLUID	BF REGISTRATION	COLORADO	BF043-13
SUPER S [®] DOT3 BRAKE FLUID	BF REGISTRATION	FLORIDA	003487
SUPER S [®] DOT4 BRAKE FLUID	BF REGISTRATION	FLORIDA	003486
ANTIFREEZE PERMIT	AF REGISTRATION	COLORADO	
SUPER S [®] ANTI-FREEZE FULL STRENGTH	AF REGISTRATION	FLORIDA	006389
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD 50/50	AF REGISTRATION	FLORIDA	004527
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD FULL STRENGTH	AF REGISTRATION	FLORIDA	006402
SUPER S [®] ANTI-FREEZE GREEN 50/50	AF REGISTRATION	FLORIDA	006415
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK 50/50	AF REGISTRATION	FLORIDA	005837
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK FULL STRENGTH	AF REGISTRATION	FLORIDA	006284
SUPER S [®] ANTI-FREEZE EXTENDED LIFE FULL STRENGTH	AF REGISTRATION	FLORIDA	006753
SUPER S [®] ANTI-FREEZE EXTENDED LIFE 50/50	AF REGISTRATION	FLORIDA	000092
SUPER S [®] ANTI-FREEZE HD FLEET GREEN FULL STRENGTH	AF REGISTRATION	FLORIDA	006431
SUPER S [®] ANTI-FREEZE GREEN HD FLEET GREEN 50/50	AF REGISTRATION	FLORIDA	006428
SUPER S [®] ANTI-FREEZE FULL STRENGTH	AF REGISTRATION	GEORGIA	1348
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD 50/50	AF REGISTRATION	GEORGIA	1351
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD FULL STRENGTH	AF REGISTRATION	GEORGIA	1349
SUPER S [®] ANTI-FREEZE GREEN 50/50	AF REGISTRATION	GEORGIA	1352
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK 50/50	AF REGISTRATION	GEORGIA	1350
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK FULL STRENGTH	AF REGISTRATION	GEORGIA	1347
SUPER S [®] ANTI-FREEZE EXTENDED LIFE FULL STRENGTH	AF REGISTRATION	GEORGIA	1346
SUPER S [®] ANTI-FREEZE EXTENDED LIFE 50/50	AF REGISTRATION	GEORGIA	1353
SUPER S [®] ANTI-FREEZE HD FLEET GREEN FULL STRENGTH	AF REGISTRATION	GEORGIA	1355
SUPER S [®] ANTI-FREEZE GREEN HD FLEET GREEN 50/50	AF REGISTRATION	GEORGIA	1356
SUPER S [®] ANTI-FREEZE FULL STRENGTH	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD 50/50	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD FULL STRENGTH	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE GREEN 50/50	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK 50/50	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK FULL STRENGTH	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE EXTENDED LIFE FULL STRENGTH	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE EXTENDED LIFE 50/50	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE HD FLEET GREEN FULL STRENGTH	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE GREEN HD FLEET GREEN 50/50	AF REGISTRATION	NORTH CAROLINA	
SUPER S [®] ANTI-FREEZE FULL STRENGTH	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD 50/50	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD FULL STRENGTH	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE GREEN 50/50	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK 50/50	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK FULL STRENGTH	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE EXTENDED LIFE FULL STRENGTH	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE EXTENDED LIFE 50/50	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE HD FLEET GREEN FULL STRENGTH	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE GREEN HD FLEET GREEN 50/50	AF REGISTRATION	OKLAHOMA	54
SUPER S [®] ANTI-FREEZE FULL STRENGTH	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD 50/50	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE UNIVERSAL GOLD FULL STRENGTH	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE GREEN 50/50	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK 50/50	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE EXTENDED LIFE HD TRUCK FULL STRENGTH	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE EXTENDED LIFE FULL STRENGTH	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE EXTENDED LIFE 50/50	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE HD FLEET GREEN FULL STRENGTH	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE GREEN HD FLEET GREEN 50/50	AF REGISTRATION	SOUTH CAROLINA	188
SUPER S [®] ANTI-FREEZE ALL TYPES	AF REGISTRATION	WYOMING	10-060
SUPER S [®] MULTI-FLO [®] HD	30	SN	2212
SUPER S [®] MULTI-FLO [®] HD	40	SN	2212

Super S® Licenses & Approvals



LICENSED PRODUCT	VISCOSITY	LICENSE ORGANIZATION	LICENSE NUMBER
SUPER S® MULTI FLO®	10W-30	SN PLUS-RC/GF-5	2212
SUPERS® MULTI FLO®	5W-20	SN PLUS-RC/GF-5	2212
SUPER S® MULTI-FLO®	10W-40	SN PLUS	2212
SUPER S® MULTI FLO® HIGH MILEAGE	10W-30	SN PLUS-RC/GF-5	2212
SUPER S® MULTI FLO® HIGH MILEAGE	10W-40	SN PLUS	2212
SUPERS® MULTI FLO® HIGH MILEAGE	5W-30	SN PLUS-RC/GF-5	2212
SUPER S® FG-2000®	10W-30	CK-4	2212
SUPER S® FG-2000®	15W-40	CK-4	2212
SUPER S® FG-2000® HEAVY DUTY SYNTHETIC BLEND	15W-40	CJ-4/SN	2212
SUPER S® MULTI-FLO®	10W-40	SN	2212
SUPER S® MULTI-FLO®	20W-50	SN	2212
SUPER S® MULTI-FLO® SYNTHETIC BLEND	10W-30	SN-RC/GF-5	2212
SUPER S® MULTI-FLO® SYNTHETIC BLEND	5W-20	SN-RC/GF-5	2212
SUPER S® MULTI-FLO® SYNTHETIC BLEND	5W-30	SN-RC/GF-5	2212
SUPER S® SUPERSYN™	0W-20	SN-RC/GF-5	2212
SUPER S® SUPERSYN™	0W-40	SN	2212
SUPER S® SUPERSYN™	10W-30	SN-RC/GF-5	2212
SUPER S® SUPERSYN™	5W-20	SN-RC/GF-5	2212
SUPER S® SUPERSYN™	5W-40	SN	2212
SUPER S® SUPERSYN™	5W-40	SN PLUS	2212
SUPER S® SUPERSYN™ EURO	5W-30	SL	2212
SUPER S® SUPERSYN™ EURO	5W-40	SN	2212
SUPER S® SUPERSYN™ LSPI	5W-20	SN-RC/GF-5	2212
SUPER S® SUPERSYN™	10W-30	SN PLUS-RC/GF-5	2212
SUPER S® SUPERSYN™	5W-20	SN PLUS-RC/GF-5	2212
SUPER S® FG-2000®	15W-40	CK-4, CJ-4/SN	2212
SUPER S® SUPERSYN™	0W-16	SN PLUS	2212
SUPER S® SUPERSYN™	0W-30	SN PLUS-RC/GF-5	2212
SUPER S® SUPERSYN™ DEXOS 1™ GEN 2	0W-20	SN PLUS-RC/GF-5	2212
SUPER S® SUPERSYN™ DEXOS 1™ GEN 2	5W-30	SN PLUS-RC/GF-5	2212
SUPER S® SUPERSYN™ DEXOS1™	0W-20	SN-RC/GF-5	2212
SUPER S® SUPERSYN™ HD FLEET	15W-40	CJ-4, CI-4/SN	2212
SUPER S® SUPERSYN™ HD FLEET	15W-40	API	2212
SUPER S® SUPERSYN™ DEXOS 1™ GEN 2	0W-20		D10456HH016
SUPER S® SUPERSYN™ DEXOS 1™ GEN 2	5W-30		D10457HH016
SUPER S® MULTI-FLO® SAE 5W-20	GM	GM6094M	
SUPER S® MULTI-FLO® SAE 10W-30	GM	GM6094M	
SUPER S® MULTI-FLO® SAE 5W-30	GM	GM6094M	
SUPER S® SUPERSYN™ SAE 5W-20	GM	GM6094M	
SUPER S® SUPERSYN™ SAE 5W-30	GM	GM6094M	
SUPER S® SUPERSYN™ SAE 10W-30	GM	GM6094M	
SUPER S® FG-2000® 15W-40 CK-4/SN		VOLVO VDS-4, MACK EO-0, RENAULT VI RLD-4, CUMMINS CES 20086, DETROIT DIESEL DFS93K222, FORD WSS-W2C171-F1	
SUPER S® FG-2000® 15W-40 CJ-4/SN		DFS93K218, CES 20081, FORD WSS-W2C171-F1	
SUPER S® FG-2000® 10W-30 CJ-4/SN		VOLVO STD 417-0001, DC 228.31, CATERPILLAR ECF-3, CUMMINS CES 20081, DFS93K222, FORD WSS-W2C171-F1	
SUPER S® FG-2000® 10W-30 CK-4/SN		VOLVO VDS-4, MACK EO-0, RENAULT VI RLD-4, CES 20086, DFS93K222, FORD WSS-W2C171-F1	
SUPER S® SUPERSYN™ OUTBOARD 2-CYCLE MARINE OIL (RL-13136L)	NMMA	TC-W3	RL-13136L
SUPER S® DEXRON VI® ATF (J-60153)	GM		J-60153
SUPER S® SUPERSYN™ DEXOS1™ FULL SYNTHETIC	0W-20	A5/B5 - 2016	
SUPER S® SUPERSYN™ DEXOS1™ FULL SYNTHETIC	5W-30	A5/B5 - 2016	
SUPER S® SUPERSYN™ EURO C3	5W-30	C3 - 2016	
SUPER S® SUPERSYN™ EURO C3	5W-40	C3 - 2016	
SUPER S® FG-2000® 10W-30 SYN BLEND API CK-4	10W-30	E9 - 2016	
SUPER S® FG-2000® 15W-40 SYN BLEND API CK-4/SN	15W-40	E9 - 2016	
SUPER S® SUPERSYN™ EURO	5W-30	A3/B4 - 2016	
SUPER S® SUPERSYN™ EURO	5W-40	A3/B4 - 2016	



Super S
SATISFACTION

ENGINE PROTECTION PLAN

**Protect engines against
oil-related problems
for 300,000 miles
or 10 years,
whichever comes first.***



The **FREE 300,000 Mile/ 10 Year Limited Engine Protection Plan** is a maintenance plan for customers who exclusively change oil with Super S[®] Motor Oil every 4 months or 5,000 miles.

Register online
at **www.smittysinc.net**

Click the Super S[®] Engine Protection Plan logo and complete the application including your Super S[®] Authorized Installer Number. Each qualified applicant will receive confirmation of their enrollment in the Super S[®] Engine Protection Program.

To Qualify:

- Vehicle is maintained with Super S[®] engine oil every 4 months or 5,000 miles
- Vehicle has been manufactured within the last 48 months.
- Vehicle has been owned or leased less than 18 months by current owner.
- Vehicle has 75,000 miles or less.
- Vehicle has been regularly serviced in accordance with owner's manual specifications (severe driving conditions).

The oil filter and air cleaner elements must be maintained as recommended by the vehicle manufacturer. You need to take great care of your engine to make it last for 10 years or 300,000 miles and Super S[®] Motor Oil will help you do just that.

* See the Super S Engine Protection Limited Warranty Statement for complete coverage online at www.smittysinc.net.



The Following Super S[®] products Qualify for the Super S Engine Protection Plan

Super S[®] SuperSyn[™] Full Synthetic Motor Oil
Super S[®] Euro SuperSyn[™] Full Synthetic Motor Oil
Super S[®] Multi-Flo[®] Synthetic Blend Motor Oil
Super S[®] dexos1[™] Premium Motor Oil



Quality Assurance & Consumer Care PROGRAM

At Smitty's Supply Inc. it is our mission to provide quality products and dependable service to our customers at competitive prices. We strive for continuous improvement in all that we do and challenge ourselves to provide a full and complete line of products and service advantages above our competition.

We developed the Super S® Satisfaction program and Lubricant Warranty to guarantee the quality of the fluids and the packaging on all of our products.

QUALITY CONTROL AT ALL PRODUCTION STAGES

We assign quality control managers at all stages of production for inspection at specified intervals to insure products are not only meeting customers satisfaction, but meeting Smitty's Supply's set rigorous standards which often times exceed industry specifications.

Our state-of-the art laboratory provides an integrated solution for quality assurance and process control utilizing modern equipment such as:

- Cannon Auto Viscometers
- Cannon Cold Cranking Simulator
- Brookfield Low Temperature Viscometer

Products are tested for the following quality criteria at all stages of production. Samples are taken from the top & bottom of vessels and at set intervals on production lines for thorough testing. Certificate of Analysis is issued for approved product, reviewed and signed by laboratory personnel and logged in the database.

- Kinematic viscosities
- Elemental quantities
- Elemental contamination
- Foreign contamination (water, etc...)



Smitty's Supply is proud to be an ISO 9001:2015 facility, which strives to meet the quality needs of all our customers.

- We continually improve our processes on all levels and maintain a full-time, round-the-clock staff of highly trained Quality Assurance personnel.
- We perform daily equipment calibrations and maintain monthly metric systems to measure predetermined aspects of our business.
- Semi-annual internal audits are conducted of our entire facility and associated documentation to ensure we are meeting our annual business and quality goals.



Smitty's Supply Inc. ISO 9001:2015 Certified Laboratory Test Methods

TEST METHOD	ASTM METHOD
Nitrogen	ASTM D4629
Nitrogen	ASTM D5762
Viscosity @ 100°C	ASTM D7279
Viscosity @ 40°C	ASTM D7279
Viscosity Index	ASTM D2270
Cold Crank (Viscosity, cP)	ASTM D5293
Brookfield Viscosity (Viscosity, cP)	ASTM D2983
NOACK Volatility (Evaporation, % Loss)	ASTM D5800
X-Ray (Elemental Analysis, ppm)	ASTM D6481
Specific Gravity	ASTM D4052
Pour Point	ASTM D5949
ICP (Elemental Analysis, ppm)	ASTM D4951
Flash Point (Cleveland Open Cup)	ASTM D92
Flash Point (Pensky Martens Closed Cup)	ASTM D93
Color	ASTM D1500
Particle Count	ASTM D7647
Demulsibility (Water Separability)	ASTM D1401
MRV (Yield Stress/ Apparent Viscosity)	ASTM D4684
High Temperature/High Sheer (HTHS) (Meets SAE J300 Specification)	ASTM D5481
Karl Fisher	ASTM E203



63415 Hwy 51, Roseland, LA 70456
(800) 256-7575

Visit Our Website!
www.SMITTYSINC.net



@SuperSGLOBAL

