


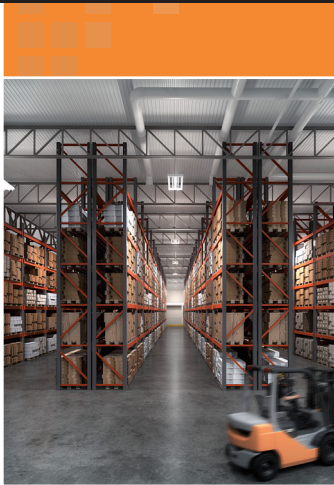

DISTRIBUTION

- Full LED product line with nickel cadmium batteries
- All products stocked and priced to sell
- EBPLED & SELW are market leading products – perfect entry at distribution

COMMERCIAL

- Market leading LED emergency coverage creates lowest total cost solution
- Intuitive catalog logic and bundled features simplify the design process
- Superior options for design build applications

INDUSTRIAL

- Market leading LED emergency coverage creates lowest total cost solution
- Intuitive catalog logic and bundled features simplify the design process
- Ideal for wet locations, extreme temperatures and harsh environments

SPECIFICATION

- Full LED portfolio
- Market leading patent pending customizable solutions



Powering Business Worldwide

Emergency Products



												
Series	APEL	SELW	SEL	SEL	LEM	SEL	SELM	SELMREC	SELA	AEL2	SELIN60SD	SELD
Spec Sheet	APEL series spec sheet	SELW series spec sheet	SEL17 spec sheet SEL25/50 spec sheet	SEL25/50/60 spec sheet	LEM series spec sheet	SEL25/50/60 spec sheet	SELM series spec sheet	SELMREC spec sheet	SELA series spec sheet	AEL2 series spec sheet	SELIN series spec sheet	SELD series spec sheet
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate	Sheet Metal	Sheet Metal	Polycarbonate	Die Cast AL	Fiberglass	Die Cast AL
Source	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED
Coverage	15 feet	25 or 29 feet	17/25/50 feet	25/50/60 feet	29 feet	25/50/60 feet	25 feet or 60 feet	25, 50 or 60 feet	29 feet	25 feet	25, 50 or 60 feet	60 feet
Battery	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium	Nickel cadmium
Remote Capability	No	NA	No	4 to 10 watts	Yes	10 to 16 watts	4 to 16 watts	4 to 10 watts	No	No	Yes	Yes
Color	White	Ag/BK/WH/BZ	White or Black	White or Black	White or Black	White or Black	White	White or Black	White or Black	Ag/BK/WH/BZ	Grey	Ag/BK/Wh
Temp Range	10° C to 40° C	0° C to 40° C / -20° C to 55° C	0° C to 40° C	0° C to 40° C	0° C to 40° C	0° C to 40° C	0° C to 40° C	0° C to 40° C	0° C to 40° C	-30° C to 55° C	0° C to 40° C	-30° C to 50° C
Self Diagnostics	No	Option	Option	Option	Option	Standard	Standard	Standard	Standard	Option	Standard	Standard
UL Rating	Damp location	Wet Location	Damp location	Damp location	Damp location	Damp location	Damp location	Damp location	Damp location	Wet Location	NEMA4x	NEMA 4X / HAZ option
Always On	No	No	No	No	No	No	No	No	No	Yes	No	No
Availability	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock

\$

\$\$


\$\$\$

\$\$\$\$



Powering Business Worldwide

Exit Products

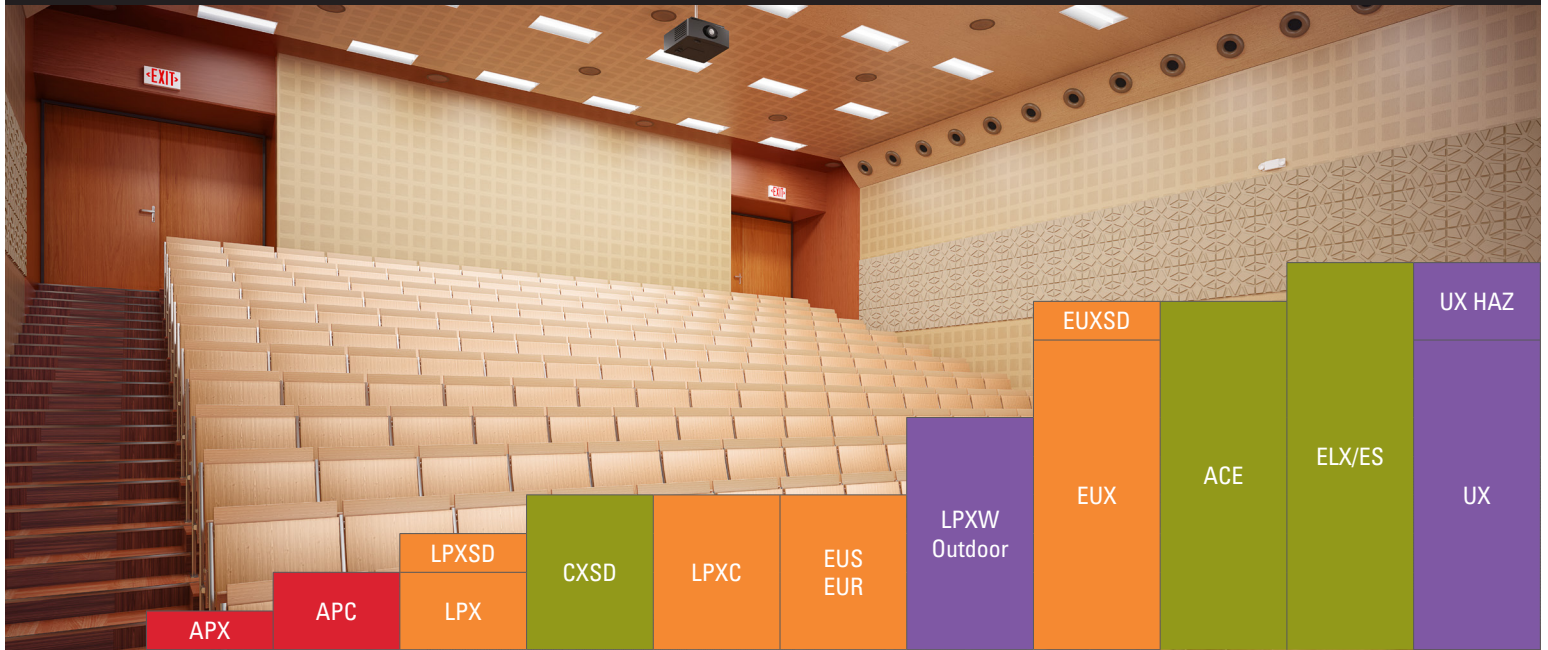

	APX	APC	LPXSD LPX	CXSD	LPXC	EUS EUR	LPXW Outdoor	EUXSD EUX	ACE	ELX/ES	UX HAZ UX
											
Series	APX	APC/APCH	LPX	CX	LPXC	EU	LPXW	EUX	Ace	ES / ELX	UX
Spec Sheet	APX series spec sheet	ACP/APCH spec sheet	LPX series spec sheet	CX series spec sheet	LPXC series spec sheet	EU series spec sheet	LPXW series spec sheet	EUX series spec sheet	Q3 - 2018	EX spec sheet ELX spec sheet	UX series spec sheet
Type	Box	Combo	Box	Box	Combo	Edge Lit	Box	Edge Lit	Circular	Edge Lit	Box
Material	Polycarbon-ate	Polycarbon-ate	Polycarbon-ate	Die Cast	Polycarbon-ate	Aluminum	Polycarbon-ate	Aluminum	Aluminum	Aluminum	Die Cast AL
Mounting	Universal		Universal	Universal	Universal	Sur / Rec	Universal	Universal	Universal	Sur / Rec	Universal
Faces	Universal	Universal	Universal	Universal	Universal	Universal	One or Two	Universal	Universal	One or Two	One or Two
Letter Color	Red or Green	Red or Green	Red & Green	Red & Green	Red & Green	Red or Green	Red or Green	Red or Green	Red & Green	Red or Green	Red & Green
Housing Color	White, Black	White, Black	White, Black	Silver, Black, White	White, Black	Silver	Silver, Black, White	Silver, Black, White	Silver, Black, White	Wh,BK,B-Z,BR,AL	Silver, Black, White
Self Diag-nostics	NA	NA	Option	Option	Option	NA	Standard	Option	Standard	Option ELX	Standard
Remote Capacity	Option	Yes	Option	No	Option	No	No	No	No	No	No
UL Rating	Damp location	Damp location	Damp location	Damp location	Damp location	Damp location	Wet location	Damp location	Damp location	Damp location	NEMA4X/HAZ
Availability	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock	MTO	Stock

\$

\$\$

\$\$\$

\$\$\$\$

Remote Products



	APWR	SRP	SRM	SRPA
				
Series	APWR	SRP	SRM	SRPA
Spec Sheet	APWR series spec sheet	SRP series spec sheet	SRM series spec sheet	SRPA series spec sheet
Material	Plastic	Polycarbonate	Sheet Metal	Polycarbonate
Source	LED	LED	LED	LED
Number of heads	1 or 2	1 or 2	1 or 2	2
Adjustable	Yes	Yes	Yes	Yes, with forward throw
Coverage	15 feet	13 to 60 feet	13 to 60 feet	29 feet
Voltage input	3.6 volts	4.8 through 12 volts	4.8 through 12 volts	4.8 through 6 volt
Color	White,Black	White,Black,Grey	White,Black,Grey	White,Black,Silver,Grey
Temp Range	0 C to 40 C	-30 C to 60 C	-30 C to 60 C	-30 C to 55 C
UL Rating	Wet location	Wet Location	Wet Location	Wet Location
Availability	Stock	Stock	Stock	Stock
	\$	\$	\$	\$