

TAYLOR®

2 0 1 7
Professional
PRODUCTS



TOOLSTHE PROS TRUST



The Taylor Advantage

Best Quality:

Precision measurement has been the exclusive focus of our business for 150 years. Our ability to fulfill the professional market's exacting standards for accuracy, durability, and design is built on a legacy of technical expertise, quality materials and a constant awareness of changing industry needs.

Best Selection:

The diversity of our product line reflects an ongoing commitment to provide the best solutions to the food service and professional community at every level... with ever-expanding choices in specialized temperature and weight measurement instruments that promote food safety, enhanced productivity and user convenience.

One Source:

We're the Food Service and Professional industry's most complete source for both thermometers and scales. So to simplify your purchasing process, plus improve your choices, quality and value... We've got everything you need.





Contents

Thermometers	4-29
Instant Read Dial Thermometers 1" Standard Grade	4-5
Instant Read Dial Thermometers 1" Superior Grade	5
Bi-Therm® Dial Thermometers 2" Superior Grade	6
Bi-Therm® Dial Thermometers 1 ¾" Superior Grade	6
Hand Held Thermocouple Thermometers	7
K-Type Probes for Thermocouple Thermometers	8
Infrared Thermometers	8-9
Pocket Digital Thermometers	9-11
Roast/Meat Thermometers	12
Cooking Thermometers	13
Candy & Deep Fry Thermometers	13-14
Oven/Grill Thermometers	15
Refrigerator/Freezer Thermometers	16-18
Panel Mount Digital Thermometer	18
Economical Thermometers	19-20
HACCP Food Safety Products	21
Special Use Thermometers/Strips	22-23
Large Dial Thermometers/Clocks	24-25
Window/Wall Thermometers	26-27
Max/Min Thermometers	28-29
Pocket Case Thermometers	29
Thermometer Comparison Guide	30-31
 Timers	32-34
Mechanical	32
Digital	33-34
 Scales	35-41
Economy Digital Scales	35
Digital Portion Control Scales	35-38
Compact Analog Portion Control Scales	38
Analog Portion Control Scales	39
Heavy Duty Mechanical Scales	40
Receiving Scales	40-41
Hanging Scales	41
Scale Comparison Guide	42-43
 Chef'n Kitchen Tools & Gadgets	44-47
Fruit & Veg Prep	44-45
Switchit® Spatulas	46-47
 Wine & Bar Accessories	48-49
Manual Corkscrews	48
Preservers	49
Other Accessories	49
 Hotel & Resort	50-51
 Miscellaneous Parts, Supplies & Accessories	52
 Terms and Conditions	52
 Index	53-55

THERMOMETERS

Instant Read Dial Thermometers 1" Standard Grade



- 5" stems
- Recalibratable
- Accuracy +/- 2°F/1°C at dial midpoint
- Patented recalibration wrench built into pocket case
- Shatterproof Lexan® plastic lens
- High visibility dial graphics
- Convenient, protective case
- Durable stainless steel
- Superior shock protection
- Individual cartons with hang tabs (except 3621N, 5988N, 5989N, & 5989-44 which are a blister card)
- NSF listed



Exclusive Safe-T-Set Calibration System

All 1" models have a protective pocket case which doubles as a calibration tool.



3621N

- Temperature range: 0°F /220°F
- Antimicrobial case

UPC	PACK QTY.	U of M
0 77784 03621 1	6	1 ea.

5988N

- Temperature range: 50°F /550°F

UPC	PACK QTY.	U of M
0 77784 05988 3	6	1 ea.

5989N

- Temperature range: 0°F /220°F

UPC	PACK QTY.	U of M
0 77784 05989 0	6	1 ea.

5989-44

- Temperature range: 0°F/220°F and -14°C/105°C
- International series

UPC	PACK QTY.	U of M
0 77784 59894 8	6	1 ea.

6065N

- Temperature range: -40°C /70°C

UPC	PACK QTY.	U of M
0 77784 60650 6	12	1 ea.

6091N

- Temperature range: -40°F /120°F

UPC	PACK QTY.	U of M
0 77784 06091 9	12	1 ea.

6092N

- Temperature range: 0°F /220°F

UPC	PACK QTY.	U of M
0 77784 60921 7	12	1 ea.

6093N

- Temperature range: 50°F /550°F

UPC	PACK QTY.	U of M
0 77784 06093 3	12	1 ea.

6094N

- Temperature range: -40°C /50°C

UPC	PACK QTY.	U of M
0 77784 06094 0	12	1 ea.

6096N

- Temperature range: -40°F /160°F

UPC	PACK QTY.	U of M
0 77784 06096 4	12	1 ea.

6099N

- Temperature range: -10°C /110°C

UPC	PACK QTY.	U of M
0 77784 06099 5	12	1 ea.

Instant Read Dial Thermometers 1 3/4" Standard Grade



- 5" stems and 1 3/4" dial
- Standard grade with 1 point calibration and antimicrobial sleeve
- NSF listed

Instant Read Dial Thermometers 1" Superior Grade



- 5" stems
- Recalibratable
- Accuracy +/- 2°F/1°C of entire range
- 3 point calibration
- Patented recalibration wrench built into pocket case
- Shatterproof Lexan® plastic lens
- High visibility dial graphics
- Convenient protective case
- Durable stainless steel
- Superior shock protection
- Individual cartons with hang tabs
- NSF listed

6071

- Temperature range: -40°F /120°F

UPC	PACK QTY.	U of M
0 77784 01101 0	12	1 ea.

8018N

- Temperature range: 0°F/220°F and 0°C/100°C

UPC

PACK QTY.

U of M

6 1 ea.



0 77784 08018 4

6072N

- Temperature range: 0°F/220°F

UPC

PACK QTY.

U of M

12 1 ea.



0 77784 06072 8

6073J

- Temperature range: 50°F /550°F

UPC

PACK QTY.

U of M

12 1 ea.



0 77784 00280 3

6075

- Temperature range: 25°F /125°F

UPC

PACK QTY.

U of M

12 1 ea.



0 77784 01099 0

6076J

- Temperature range: -40°F /160°F

UPC

PACK QTY.

U of M

12 1 ea.



0 77784 60761 9

6079J

- Temperature range: -10°C /110°C

UPC

PACK QTY.

U of M

12 1 ea.



0 77784 06079 7

THERMOMETERS

Bi-Therm® Dial Thermometers 2" Superior Grade



INSTANT READ STAINLESS STEEL

- 8" stems
- Recalibratable
- 3 point calibration
- Accuracy +/- 2°F/1°C of entire range
- Stainless steel external parts
- High visibility dial graphics
- Extended scale design
- Packed in individual boxes

UPC	PACK QTY.	U of M
0 77784 06211 1	1	1 ea.
UPC	PACK QTY.	U of M
0 77784 06212 8	1	1 ea.
UPC	PACK QTY.	U of M
0 77784 06215 9	1	1 ea.
UPC	PACK QTY.	U of M
0 77784 06220 3	1	1 ea.
UPC	PACK QTY.	U of M
0 77784 06235 7	1	1 ea.

Bi-Therm® Dial Thermometers 1¾" Superior Grade



INSTANT READ STAINLESS STEEL

- 8" stems
- Recalibratable
- 3 point calibration
- Accuracy +/- 2°F/1°C of entire range
- Stainless steel external parts
- High visibility dial graphics
- Anti-parallax dial/case design
- Extended scale design
- Superior shock protection
- Packed in individual boxes
(except 8215N is on blister card)

UPC	PACK QTY.	U of M
0 77784 08212 6	1	1 ea.
UPC	PACK QTY.	U of M
0 77784 08215 7	6	1 ea.
UPC	PACK QTY.	U of M
0 77784 08220 1	12	1 ea.
UPC	PACK QTY.	U of M
0 77784 08238 6	12	1 ea.

Hand Held Thermocouple Thermometers



RECALIBRATE AAA WATER PROOF °F/°C
 BATTERY INCLUDED FAHRENHEIT/ CELSIUS

9306N Splash-Proof Dual Temp Infrared Thermometer with Fold Out Thermocouple Step Down Probe

- Thermocouple range: -67°/626°F and -55°C/330°C with accuracy from 14° to 149°F (-10° to 65°C) +/- 1°F (0.6°C)
- Infrared range: -67°/482°F and -55°C/250°C with accuracy from 32°F to 149°F (0°C to 65°C) +/- 2°F (1°C)
- Resolution: 0.5°F or 0.2°C
- HACCP pass/fail light system
- Min/max/hold features
- Adjustable emissivity
- D:S=3:1
- Auto shut off
- IP65 rated
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 09306 1	2	1 ea.



RECALIBRATE 9V °F/°C
 BATTERY INCLUDED FAHRENHEIT/ CELSIUS

9405 High Accuracy Waterproof K-Type Thermocouple Thermometer

- Temperature range: -40°F /500°F and -40°C/260°C
- With a 2-second response probe and a 4 ft. cord
- +/- 1° over HACCP range
- Recalibratable from the front panel switches
- Auto-off feature
- IP65 rated
- 1 - 9V battery included

UPC	PACK QTY.	U of M
0 77784 09405 1	24	1 ea.



MULTIUSE AAA °F/°C
 BATTERY INCLUDED FAHRENHEIT/ CELSIUS

9532 K-Type Thermocouple Plus Infrared Thermometer

- Thermocouple range: -58°/662°F and -50°C/350°C
- Infrared range: -58°/662°F and -50°C/350°C
- Compact size with oversized split LCD
- Infrared modes: min/max/lock and C/F switch
- Spot to distance ratio is 1:1
- Probe is not included
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 09532 4	2	1 ea.



°F/°C 9V
 FAHRENHEIT/ CELSIUS BATTERY INCLUDED

9815A Thermocouple Data Logger

- Temperature range: -328°F /2498°F and -200°C/1370°C with accuracy of +/- 2°F (1°C)
- Single point data logger
- For use with any type K probe
- It uses RS232 interface to a PC
- Includes software
- 1 - 9V battery included

UPC	PACK QTY.	U of M
0 77784 09815 8	15	1 ea.



RECALIBRATE AAA °F/°C
 BATTERY INCLUDED FAHRENHEIT/ CELSIUS

9821-PBN Thermocouple Thermometer with Step Down K-Type Probe

- Temperature range: -58°F /662°F and -50°C/350°C
- Compact size with oversized 1.1" LCD readout
- Hold function and C/F switch
- Includes 1.5mm step down k-type probe with quick response time
- IP65 rated
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 02886 5	2	1 ea.



AAA °F/°C
 BATTERY INCLUDED ANTI-MICROBIAL FAHRENHEIT/ CELSIUS

9867FDA Digital Folding Probe Thermometer

- Temperature range: -40°F /572°F and -40°C/300°C
- 1.5mm stepdown probe diameter, FDA recommended
- Antimicrobial casing
- Recalibration system
- Thermocouple
- Stabilized reading in 5 seconds or less
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 09867 7	2	1 ea.

THERMOMETERS

K-Type Probes for Thermocouple Thermometers



**9405RP Replacement Probe
for Model 9405**

- 1.575 mm tip diameter probe

UPC	PACK QTY.	U of M
0 77784 00372 5	1	1 ea.



9806 Clip-On Probe

- Clip-on oven probe includes 4' lead

UPC	PACK QTY.	U of M
0 77784 09806 6	1	1 ea.



9810-2 Hamburger/Filet Probe

- 3/16" tip with 5' lead

UPC	PACK QTY.	U of M
0 77784 00376 3	1	1 ea.



9812 Angle Surface Probe

- Includes 5' lead

UPC	PACK QTY.	U of M
0 77784 09812 7	1	1 ea.



**9817 Step-Down Penetration
Probe with 3' Lead**

- 1.575 mm tip diameter with 3' lead

UPC	PACK QTY.	U of M
0 77784 09817 2	1	1 ea.



**9818 Step-Down Penetration
Probe with 3' Lead**

- 1.50 mm tip diameter with 3' lead

UPC	PACK QTY.	U of M
0 77784 09818 9	1	1 ea.

Infrared Thermometers



CR2032 BATTERY INCLUDED HOLD °F/°C FAHRENHEIT/ CELSIUS

**9305 Dual Temp Infrared &
Thermocouple Thermometer**

- Thermocouple range: -67°F / 630°F and -55°C/330°C
- Infrared range: -27°F / 428°F and -33°C/220°C
- Great for non-contact measurement
- Min/max/hold features
- Includes folding step down probe with nylon storage case
- 1 - CR2032 battery included

UPC	PACK QTY.	U of M
0 77784 09305 4	2	1 ea.



AAA BATTERY INCLUDED °F/°C FAHRENHEIT/ CELSIUS

9523 Infrared Thermometer

- Temperature range: -49°F / 752°F and -45°C/400°C
- Scan and hold features
- Emissivity fixed at 0.95 and resolution at 0.1°F/0.1°C
- Spot to distance ratio is 6:1
- Includes nylon storage case
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 01200 0	2	1 ea.



CR2032 BATTERY INCLUDED

9526 Mini Infrared Thermometer ★

- Temperature range: -27°F / 390°F
- In °F scale only
- Compact and easy to scan
- Auto-off feature
- Spot to distance ratio is 1:1
- Resolution 0.5°
- 1 - CR2032 battery included

UPC	PACK QTY.	U of M
0 77784 02870 4	6	1 ea.

Infrared Thermometers (cont.)



9527 Infrared Thermometer

- Temperature range: -67°F /428°F and -55°C/220°C with accuracy of +/- 1.1°F (0.6°C)
- Resolution: 0.1°F/C
- Min/max/lock modes
- Auto-off after 15 seconds
- Emissivity range is 0.95 (default) and adjustable to 0.005 to 1 (step 0.1)
- Quick response at 1 second
- Low battery indicator
- Protective rubber boot and lanyard included
- 1 - CR2032 battery included

UPC	PACK QTY.	U of M
0 77784 09527 0	2	1 ea.



Pocket Digital Thermometers




1476FDA Compact Folding Thermometer ★

- Temperature range: -40°F /392°F and -40°C/200°C
- FDA recommended stepdown probe
- Auto-off feature
- Magnet on the back
- Lanyard included
- 1 - LR44 battery included



3516 Digital Instant Read Thermometer

- Temperature range: -40°F /302°F
- Available in °F scale only
- 0.4" LCD readout
- Protective pocket sleeve
- 1 - LR44 battery included

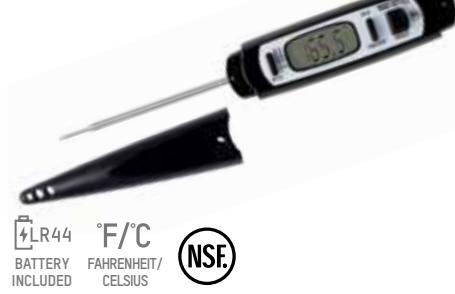

3519FDA Waterproof Digital Instant Read Thermometer with Stepdown Probe

- Temperature range: -40°F /450°F and -40°C/230°C
- Resolution: 0.1°F/C
- Easy to grip, pen style design
- 1.5mm stepdown probe as recommended by the FDA
- Waterproof design with instant read and hold feature
- Auto-shut off feature
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 02531 4	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 35160 4	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 02509 3	3	1 ea.

THERMOMETERS

Pocket Digital Thermometers (cont.)



LR44 °F/°C
BATTERY FAHRENHEIT/ CELSIUS

3519PRFDA Waterproof Digital Instant Read Thermometer with Stepdown Probe

- Temperature range: -40°F /450°F and -40°C/230°C
- Resolution: 0.1°F/C
- Easy to grip, pen style design
- 1.5mm stepdown probe as recommended by the FDA
- Waterproof design with instant read and hold feature
- Auto-shut off feature
- Helps support allergy safety
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 02565 9	3	1 ea.



 °F/°C
MULTIUSE HOLD PIVOT FAHRENHEIT/ CELSIUS

9836 Adjustable Head Digital Thermometer

- Temperature range: -40°F /450°F and -40°C/230°C
- Supersized 1.0" readout
- Head pivots in multiple positions for easier reading
- Durable stainless steel 5" stem with step down tip
- Storage sleeve
- Auto shut off feature
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 01009 9	6	1 ea.



LR44 °F/°C
BATTERY FAHRENHEIT/ CELSIUS

9840PRN Digital Thermometer

- Temperature range: -40°F /302°F and -40°C/150°C
- Reduces the risk of cross-contamination
- Helps support allergy safety
- Stainless steel stepdown probe
- Auto-off feature
- Protective sleeve included
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 01702 9	6	1 ea.



LR44 °F/°C
BATTERY FAHRENHEIT/ CELSIUS

9840RB Digital Thermometer

- Temperature range: -40°F /302°F and -40°C/150°C
- Protective rubber boot included to withstand drops
- Stainless steel stepdown probe
- Auto-off feature
- Protective sleeve included
- 2 - LR44 batteries included

UPC	PACK QTY.	U of M
0 77784 01127 0	6	1 ea.



LR44 °F/°C
BATTERY INCLUDED

9841RB High Temp Digital Thermometer

- Temperature range: -40°F /500°F and -40°C/260°C
- Protective rubber boot included to withstand drops
- Stainless steel stepdown probe
- Auto-off feature
- Protective sleeve included
- 2 - LR44 batteries included

UPC	PACK QTY.	U of M
0 77784 98411 6	6	1 ea.



LR44 °F/°C
BATTERY INCLUDED

9842FDA Waterproof Digital Thermometer

- Temperature range: -40°F /450°F and -40°C/230°C
- Auto-off feature
- Recalibratable and C/F switch
- Antimicrobial sleeve and casing
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 00428 9	6	1 ea.

Pocket Digital Thermometers (cont.)



BACKLIGHT CR2032 ANTI-MICROBIAL °F/°C

9848EFDA Waterproof Digital Thermometer

- Temperature range: 40°F /450°F and -40°C/230°C
- Waterproof and dishwasher safe
- Min/max/hold features
- Recalibratable
- Antimicrobial sleeve and casing
- Blue backlit LCD
- Lanyard included
- 1 - CR2032 battery included

UPC	PACK QTY.	U of M
0 77784 00535 4	6	1 ea.



AAA BATTERY ANTI-MICROBIAL °F/°C

9867FDA Digital Folding Probe Thermometer

- Temperature range: -40°F /572°F and -40°C/300°C
- 1.5mm stepdown probe diameter, FDA recommended
- Antimicrobial casing
- Recalibration system
- Thermocouple
- Stabilized reading in 5 seconds or less
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 09867 7	2	1 ea.



CR1225 BATTERY ANTI-MICROBIAL °F/°C

9877FDA Compact Waterproof Digital Thermometer

- Temperature range: -40°F /450°F and -40°C/232°C
- Waterproof and dishwasher safe
- 1.5mm stepdown probe diameter, FDA recommended
- Response time less than 6 seconds with 1 second updates
- Min/max/hold features
- Safe-T-Guard™ antimicrobial case and sleeve
- Auto-off feature
- 1 - CR1225 battery included

UPC	PACK QTY.	U of M
0 77784 98770 4	6	1 ea.



BACKLIGHT CR2032 ANTI-MICROBIAL °F/°C

9878E High Precision Waterproof Digital Thermometer

- Temperature range: -40°F /500°F and -40°C/260°C
- Waterproof and dishwasher safe
- 1.5 mm stepdown probe diameter, FDA recommended
- Min/max/hold features
- Recalibratable
- Safe-T-Guard™ antimicrobial case and sleeve
- Auto-off and disable auto-off functions
- Amber backlit LCD
- 1 - CR2032 battery included

UPC	PACK QTY.	U of M
0 77784 09878 3	3	1 ea.



BACKLIGHT CR2032 ANTI-MICROBIAL °F/°C ALLERGY

9878EPR Allergen Waterproof Digital Pocket Thermometer

- Temperature range: -40°F /500°F and -40°C/260°C
- Waterproof and dishwasher safe
- Helps support allergy safety
- 1.5mm stepdown probe diameter, FDA recommended
- Min/max/hold features
- Recalibratable
- Safe-T-Guard™ antimicrobial case and sleeve
- Auto-off and disable auto-off functions
- Amber backlit LCD
- 1 - CR2032 battery included

UPC	PACK QTY.	U of M
0 77784 01659 6	3	1 ea.

THERMOMETERS

Roast/Meat Thermometers



3504 Meat Dial Thermometer

- Temperature range: 120°F to 210°F
- 2" dial with USDA guidelines
- Adjustable temperature indicator
- Stainless steel 4½" stem



5937N Multi-Purpose Thermometer

- Temperature range: 105°F to 185°F
- Armored sabre-tipped tube for easy piercing
- Meat and yeast temperature guides
- Dishwasher safe



5939N Meat Thermometer

- Temperature range: 120°F to 212°F
- Large 3" dial
- Slide temperature indicator
- Meat guidelines on dial

UPC	PACK QTY.	U of M
0 77784 35040 9	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05937 1	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05939 5	6	1 ea.



5947 Oven/Meat Dial Thermometer

- Oven temperature: 100°F to 500°F
- Meat temperature: 120°F to 190°F
- Monitor cooking and oven temperature at the same time



61054J Meat Thermometer

- Temperature range: 0°F to 220°F
- Easy to read 2" dial
- 4" stainless steel stem with glass crystal
- Packed in individual carton

UPC	PACK QTY.	U of M
0 77784 05947 0	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 61054 1	1	1 ea.

Cooking Thermometers



STAINLESS STEEL
STAIN RESISTANT SURFACE
WATER PROOF

5933 Floating Thermometer

- Temperature range: -120°F to 220°F
- Floats for use in any soups, sauces, stews
- Sealed housing, temperature and food safe stainless steel construction
- 4 key temperature range indicators on dial



STAINLESS STEEL
BATTERY INCLUDED
°F/°C
FAHRENHEIT/
CELSIUS

1470FS Digital Thermometer and Timer

- Temperature range: 32°F /392°F and 0°C/200°C
- Sealed stainless steel probe with 4' cord
- Temperature alarm signals when food is done
- 1.5mm stepdown probe diameter, FDA recommended
- Non-slip nylon clip on probe to prevent moisture from entering the probe
- On/off switch to preserve battery life
- Folds down for compact storage
- Magnet on back for mounting to stove
- 2 - AAA batteries included



1470FSRP Replacement Probe for Model 1470FS

- Replacement Probe for Model 1470FS and 1470N
- Sealed stainless steel probe with 4' cord

UPC	PACK QTY.	U of M
0 77784 05933 3	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 02606 9	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 02651 9	1	1 ea.

Candy & Deep Fry Thermometers



MULTIUSE
SLIDE TEMP
REFERENCE
2" DIAL
NSF

3505 Candy/Deep Fry Thermometer

- Temperature range: -40°F /450°F and -40°C/230°C
- 2" dial with candy zones
- Adjustable pan/kettle clip
- Temperature indicator
- 6" stem



MULTIUSE
SLIDE TEMP
REFERENCE
°F/°C
FAHRENHEIT/
CELSIUS
NSF

3522 Deep Fry Thermometer

- Temperature range: 50°F /550°F and 50°C/285°C
- 1¾" dial
- Durable 12" stainless steel stem with adjustable pan clip
- Temperature indicator



MULTIUSE
SLIDE TEMP
REFERENCE
3" DIAL
NSF

5911N Candy/Deep Fry Thermometer

- Temperature range: 100°F /400°F and 50°C/200°C
- Large 3" dial
- Slide temperature indicator
- Durable rounded tip
- 6" stainless steel stem
- Candy zones on dial

UPC	PACK QTY.	U of M
0 77784 03505 4	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 03522 1	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05911 1	6	1 ea.

THERMOMETERS

Candy & Deep Fry Thermometers (cont.)



MULTIUSE °F/°C
FAHRENHEIT/
CELSIUS

5978N Candy/Deep Fry Thermometer

- Temperature range: 100°F /400°F and 50°C/200°C
- Glass tube with adjustable pan clip
- Protective storage sleeve is printed with convenient cooking chart
- 8" in length

UPC	PACK QTY.	U of M
0 77784 05978 4	6	1 ea.



MULTIUSE STAINLESS
STEEL °F/°C
FAHRENHEIT/
CELSIUS

5893N Candy/Deep Fry Thermometer

- Temperature range: 100°F /400°F and 50°C/200°C
- Insulated handle with built in pan clip
- Large printing for easy to read temperature zones
- Classic stainless steel design
- 12" in length

UPC	PACK QTY.	U of M
0 77784 05983 8	6	1 ea.



STAINLESS
STEEL

6084J8 Professional Candy/Deep Fry Thermometer

- Temperature range: 50°F /550°F
- 2" dial with 8" stem

UPC	PACK QTY.	U of M
0 77784 01305 2	50	1 ea.



STAINLESS
STEEL

6084J12 Professional Candy/Deep Fry Thermometer

- Temperature range: 50°F /550°F
- 2" dial with 12" stem

UPC	PACK QTY.	U of M
0 77784 60841 8	1	1 ea.



STAINLESS
STEEL °F/°C BATTERY
FAHRENHEIT/
CELSIUS INCLUDED

9839-15 Adjustable Head Digital Candy/Deep Fry Thermometer

- Temperature range: -40°F /450°F and -40°C/230°C
- Multi-position pivoting head
- Large 1" LCD readout
- Adjustable pan clip
- Durable stainless steel 9" stem
- Auto-off feature
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 00996 3	3	1 ea.

Oven/Grill Thermometers

**814GW Smoker Thermometer**

- Temperature range: 100°F /475°F
- Mounts directly onto smoker
- Luminescent ink for easy low-light viewing

UPC	PACK QTY.	U of M
0 77784 02840 7	6	1 ea.



STAINLESS STEEL OVEN SAFE STAIN RESISTANT SURFACE

5921N Oven Guide Thermometer

- Temperature range: 100°F /600°F
- Easy-to-read zone guide references
- Durable stainless steel
- Hangs or stands

UPC	PACK QTY.	U of M
0 77784 05921 0	6	1 ea.



STAINLESS STEEL °F/C FAHRENHEIT/ CELSIUS 3" DIAL NSF

5932 Oven Dial Thermometer

- Temperature range: 100°F /600°F and 50°C/300°C
- 3" dial
- Durable stainless steel
- Hangs or stands

UPC	PACK QTY.	U of M
0 77784 05932 6	6	1 ea.



STAINLESS STEEL °F/C NSF

5980N Professional Hot Holding Thermometer

- Temperature range: 100°F /450°F and 38°C/82°C
- Dial includes HACCP guidelines

UPC	PACK QTY.	U of M
0 77784 05980 7	6	1 ea.



STAINLESS STEEL NSF

5984J Instant Read Oven Thermometer

- Temperature range: 0°F /220°F
- 1 ¾" dial with 5" stem
- Recalibratable

UPC	PACK QTY.	U of M
0 77784 05984 5	1	1 ea.



STAINLESS STEEL 2" DIAL NSF

6021 Surface Temperature Thermometer

- Temperature range: 100°F /700°F and 50°C/350°C
- Monitor grill or any surface temperatures
- Easy-to-read 2" dial
- Enclosed design protects coil

UPC	PACK QTY.	U of M
0 77784 06021 6	6	1 ea.



STAINLESS STEEL

6246J CharBroiler Thermometer

- Temperature range: 200°F /1000°F
- Hermetically sealed
- Holder for use on the grill
- Includes heat deflection sheet for use on CharBroiler

UPC	PACK QTY.	U of M
0 77784 00699 3	1	1 ea.

THERMOMETERS

Refrigerator/Freezer Thermometers



AAA BATTERY INCLUDED
 PROGRAMMABLE
 °F/°C FAHRENHEIT/CELSIUS

1442 Critical Care Thermometer

- Temperature range: -40°F / 221°F and -40°C/105°C
- For monitoring temperature critical materials
- Programmable high & low limit alarms
- 96 hour memory of high & low temperatures
- Records a history of alarm breeches including time and duration
- Dual 6' glycol-tolerant probes
- Password protected
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 01442 4	1	1 ea.



FRIDGE
 DIGITAL DISPLAY
 MEMORY

1443 Digital Refrigerator/Freezer Thermometer

- Temperature range: -4°F /140°F and -20°C/60°C
- Large LCD readout with min/max feature
- Hangs, stands or attaches with magnet
- F/C switchable
- 1 - CR2025 battery included

UPC	PACK QTY.	U of M
0 77784 01443 1	6	1 ea.



°F/°C FAHRENHEIT/CELSIUS

1446 Wireless Refrigeration Thermometer

- Temperature range: -22°F /104°F and -30°C/40°C
- Two remote sensors transmit reading to display unit
- Visual and audible alarms based on user set min & max temperatures
- Transmission range up to 65 feet from display unit
- Audible and visual alarm with 15 minute delay
- Base: 2 - AAA batteries not included
- Remote Sensors: 4 - AA batteries not included

UPC	PACK QTY.	U of M
0 77784 01446 2	1	1 ea.



FRIDGE
 °F/°C FAHRENHEIT/CELSIUS
 FOOD SAFETY
 NSF

3503 Refrigerator/Freezer Thermometer

- Temperature range: -20°F /60°F and -30°C/30°C
- Safe temperature zone indicators
- Hangs or attaches with suction cups

UPC	PACK QTY.	U of M
0 77784 35030 0	4	1 ea.



FRIDGE
 °F/°C FAHRENHEIT/CELSIUS
 FOOD SAFETY
 NSF

3507 Refrigerator/Freezer Thermometer

- Temperature range: -20°F /80°F and -30°C/30°C
- 2½" dial
- Hangs or stands in the fridge/freezer
- Safe temperature zone indicators

UPC	PACK QTY.	U of M
0 77784 03507 8	6	1 ea.



FRIDGE
 °F/°C FAHRENHEIT/CELSIUS
 FOOD SAFETY
 NSF

3509 Refrigerator/Freezer Thermometer

- Temperature range: -20°F /80°F and -30°C/30°C
- Compact size
- Clips to rack or attaches with suction cup
- Safe temperature zone indicators
- Blister carded

UPC	PACK QTY.	U of M
0 77784 03509 2	6	1 ea.

Refrigerator/Freezer Thermometers (cont.)



°F/°C
FAHRENHEIT/
CELSIUS

FOOD
SAFETY

NSF

5924 Refrigerator/Freezer Thermometer

- Temperature range: -20°F /80°F and -30°C/30°C
- 3" dial
- Safe temperature zone indicators
- Hangs or stands




°F/°C
FAHRENHEIT/
CELSIUS

FOOD
SAFETY

NSF

5925N Refrigerator/Freezer Thermometer

- Temperature range: -20°F /80°F and -30°C/30°C
- Magnified face with shatterproof clear plastic lens
- Safe temperature zone indicators
- Hangs or attaches with suction cups

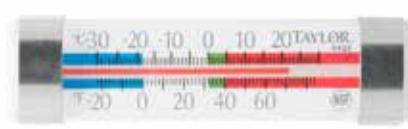

°F/°C
FAHRENHEIT/
CELSIUS

FOOD
SAFETY

NSF

5925-44 Refrigerator/Freezer Thermometer International Series

- Temperature range: -30°C /20°C and -20°F/80°F
- Magnified face with shatterproof clear plastic lens
- Safe temperature zone indicators
- Hangs or attaches with suction cups

UPC	PACK QTY.	U of M
0 77784 05924 1	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05925 8	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 59254 0	6	1 ea.



°F/°C
FAHRENHEIT/
CELSIUS

FOOD
SAFETY

NSF

5926 Economy Hanging Refrigerator/Freezer Thermometer

- Temperature range: -20°F /80°F and -30°C/30°C
- Bulk pack of 50 per box

°F/°C
FAHRENHEIT/
CELSIUS

FOOD
SAFETY

NSF

5927 Glycol Refrigerator/Freezer Thermometer

- Temperature range: -20°F /60°F and -30°C/30°C
- Polypropylene glycol simulates food product temperatures for a more accurate reading
- Not affected by ambient air changes due to door openings or cold and warm spots
- Reduces energy costs by mimicking food temperatures
- Hangs/stands/sits

UPC	PACK QTY.	U of M
0 77784 05928 5	1	1 ea.

UPC	PACK QTY.	U of M
0 77784 05927 2	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05977 7	6	1 ea.



MULTIUSE

FOOD
SAFETY

5977N Refrigerator/Freezer Thermometer

- Temperature range: -20°F /60°F
- Magnified lens and shatterproof design
- Safe temperature zone indicators

THERMOMETERS

Refrigerator/Freezer Thermometers (cont.)



°F/°C
FAHRENHEIT/
CELSIUS



5981N Professional Refrigerator/Freezer Thermometer

- Temperature range: -30°F /70°F and -34°C/20°C
- Includes HACCP guidelines for safe temperature measurement

UPC	PACK QTY.	U of M
0 77784 05981 4	6	1 ea.



°F/°C
FAHRENHEIT/
CELSIUS

5982N Milk/Beverage Thermometer

- Temperature range: -40°F /120°F and -40°C/50°C
- Includes adhesive and magnetic backing

UPC	PACK QTY.	U of M
0 77784 05982 1	12	1 ea.



STAINLESS
STEEL °F/°C
FAHRENHEIT/
CELSIUS 3"
DIAL

5994 Refrigeration Thermometer

- Temperature range: -30°F /70°F and -34°C/20°C
- Professional quality and accuracy
- Easy to read 3" dial with safe temperature one guide
- Durable stainless steel
- Includes adhesive backing

UPC	PACK QTY.	U of M
0 77784 02318 1	6	1 ea.

Panel Mount Digital Thermometer



DIGITAL
DISPLAY BATTERY
INCLUDED WATER
PROOF °F/°C
FAHRENHEIT/
CELSIUS

9940N Panel Mount Digital Thermometer

- Temperature range: -40°F /300°F and -40°C/150°C
- Flush and flange mounting options
- Waterproof housing and probe
- 10' cable for both air and liquid immersion
- 1 - AAA battery included

UPC	PACK QTY.	U of M
0 77784 09940 7	4	1 ea.



Economical Thermometers



3503 Refrigerator/Freezer Thermometer

- Temperature range: -20°F /60°F and -30°C/30°C
- Safe temperature zone indicators
- Hangs or attaches with suction cups

UPC	PACK QTY.	U of M
0 77784 35030 0	4	1 ea.



3504 Meat Dial Thermometer

- Temperature range: 120°F to 210°F
- 2" dial with USDA guidelines
- Adjustable temperature indicator
- Stainless steel 4½" stem

UPC	PACK QTY.	U of M
0 77784 35040 9	6	1 ea.



3505 Candy/Deep Fry Thermometer

- Temperature range: -40°F /450°F and -40°C/230°C
- 2" dial with candy zones
- Adjustable pan/kettle clip
- Temperature indicator
- 6" stem

UPC	PACK QTY.	U of M
0 77784 03505 4	6	1 ea.



3506 Oven Dial Thermometer

- Temperature range: 100°F /600°F and 50°C/300°C
- 2 ½" dial
- Durable stainless steel
- Hangs or stands in oven

UPC	PACK QTY.	U of M
0 77784 35060 7	6	1 ea.



3507 Refrigerator/Freezer Thermometer

- Temperature range: -20°F /80°F and -30°C/30°C
- 2 ½" dial
- Hangs or stands in the fridge/freezer
- Safe temperature zone indicators

UPC	PACK QTY.	U of M
0 77784 03507 8	6	1 ea.



3512 Pocket Test Thermometer

- Temperature range: 0°F to 220°F
- 1" magnified lens
- Protective pocket sleeve

UPC	PACK QTY.	U of M
0 77784 35120 8	6	1 ea.

THERMOMETERS

Economical Thermometers (cont.)



MULTIUSE INSTANT READ

3517 Pocket Test Thermometer

- Temperature range: 50°F to 550°F
- 1" magnified lens
- Protective pocket sleeve



MULTIUSE PROGRAMMABLE °F/°C
FAHRENHEIT/ CELSIUS

3518N Digital Cooking Thermometer

- Temperature range: 32°F /392°F and 0°C/200°C
- Stainless steel probe with 4" silicone cord
- F/C switch
- Stand or use with magnet on back for mounting to stove
- 1 - AAA battery included



LR44 BATTERY INCLUDED HOLD °F/°C
FAHRENHEIT/ CELSIUS

3519FDA Waterproof Digital Instant Read Thermometer with Stepdown Probe

- Temperature range: -40°F /450°F and -40°C/230°C
- Resolution: 0.1°F/C
- Easy to grip, pen style design
- 1.5mm stepdown probe as recommended by the FDA
- Waterproof design with instant read and hold feature
- Auto-shut off feature
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 03517 7	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 35180 2	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 02509 3	3	1 ea.



MULTIUSE SLIDE TEMP REFERENCE °F/°C
FAHRENHEIT/ CELSIUS

3522 Deep Fry Thermometer

- Temperature range: 50°F /550°F and 50°C/285°C
- 1 ¾" dial
- Durable 12" stainless steel stem with adjustable pan clip
- Temperature indicator

UPC	PACK QTY.	U of M
0 77784 03522 1	6	1 ea.

HACCP Food Safety Thermometers



- 1" dial with 5" stem
- Stainless steel construction with shatterproof lens
- Pocket sleeve with patented built-in calibration feature

1" Dial Instant Read Reduce Cross Contamination Thermometers

6092N-FSA

- Temperature range: 0°F /220°F and -10°C/100°C
- (5) 1" dial with 5" stem



UPC	PACK QTY.	U of M
0 77784 02023 4	3	1 ea.

6092NBLBC

- Temperature range: 0°F /220°F and -10°C/100°C
- Color Coded: Blue - Fish



UPC	PACK QTY.	U of M
0 77784 02558 1	6	1 ea.

6092NBRBC

- Temperature range: 0°F /220°F and -10°C/100°C
- Color Coded: Brown - Cooked Meat



UPC	PACK QTY.	U of M
0 77784 02559 8	6	1 ea.

6092NPRBC

- Temperature range: 0°F /220°F and -10°C/100°C
- Color Coded: Purple - Allergy



UPC	PACK QTY.	U of M
0 77784 02560 4	6	1 ea.

6092NRDBC

- Temperature range: 0°F /220°F and -10°C/100°C
- Color Coded: Red - Raw Meat



UPC	PACK QTY.	U of M
0 77784 02561 1	6	1 ea.

6092NYLBC

- Temperature range: 0°F /220°F and -10°C/100°C
- Color Coded: Yellow - Poultry



UPC	PACK QTY.	U of M
0 77784 02562 8	6	1 ea.

HACCP Probe Wipes



9999N

- 70% isopropyl alcohol
- 100 single use wipes per box
- 10 boxes per case
- Wipe dimensions: 1.25" x 2.65"

UPC	PACK QTY.	U of M
0 77784 09999 5	10	1 ea.

9999T

- 70% isopropyl alcohol
- 70 cleansing wipes
- 10 tubs per case
- Wipe dimensions: 3.35" x 2.25"

UPC	PACK QTY.	U of M
0 77784 02018 0	10	1 ea.

THERMOMETERS

Special Use Thermometers/Strips



°F/C
FAHRENHEIT/
CELSIUS

5416J Thermometer

- Temperature range: -40°F /130°F and -40°C/55°C
- F&C cup case with ring top
- Brass casing
- Permacolor filled

UPC	PACK QTY.	U of M
0 77784 05416 1	4	1 ea.



°F/C
FAHRENHEIT/
CELSIUS

5948N Tobacco Thermometer

- Temperature range: 10°F /200°F and -10°C/95°C
- F&C scales
- Green color zones for curating process

UPC	PACK QTY.	U of M
0 77784 05984 5	1	1 ea.



°F/C
FAHRENHEIT/
CELSIUS

5976N Soil Thermometer

- Temperature range: 20°F /180°F and 0°C/80°C
- F&C scales
- Color coded zone for min, max & optimal soil temperatures

UPC	PACK QTY.	U of M
0 77784 05976 0	6	1 ea.



°F/C
FAHRENHEIT/
CELSIUS

5997E Cappuccino Frothing Thermometer

- Temperature range: 120°F /180°F and 50°C/80°C
- Easy to read zoned dial for optimal frothing temperatures
- Sealed dial design to prevent fogging

UPC	PACK QTY.	U of M
0 77784 05997 5	4	1 ea.



RECALIBRATE °F/C
FAHRENHEIT/
CELSIUS



8215N 1 1/4" Dial Hot Beverage Thermometer

- Temperature range: 0°F /220°F and -10°C/100°C
- 9" stem with vessel clip
- Recalibratable
- Blister carded

UPC	PACK QTY.	U of M
0 77784 08215 7	6	1 ea.



WATER
PROOF °F/C
FAHRENHEIT/
CELSIUS

8750 TempRite® Temperature Test Labels

- Temperature range: 180°F /82°C with accuracy of +/- 2°F (1°C)
- Adhesive dishwasher safe and waterproof
- One time use
- 1 pack of 24 labels

UPC	PACK QTY.	U of M
0 77784 08750 3	12	1 pk.

WATER
PROOF °F/C
FAHRENHEIT/
CELSIUS

8751 TempRite® Temperature Test Labels

- Temperature range: 160°F /71°C with accuracy of +/- 2°F (1°C)
- Adhesive dishwasher safe and waterproof
- One time use
- 1 pack of 24 labels

UPC	PACK QTY.	U of M
0 77784 08751 0	12	1 pk.



WATER
PROOF °F/C
FAHRENHEIT/
CELSIUS

8752 TempRite® Temperature Test Labels

- Temperature range: 170°F /76°C with accuracy of +/- 2°F (1°C)
- Adhesive dishwasher safe and waterproof
- One time use
- 1 pack of 24 labels

UPC	PACK QTY.	U of M
0 77784 08752 7	12	1 pk.

Special Use Thermometers/Strips (cont.)



WATER PROOF °F/°C FAHRENHEIT/ CELSIUS

8766J TempRite® Temperature Test Strips

- Temperature range: 160°F / 71°C
- 1 pack of 25 test strips

UPC	PACK QTY.	U of M
0 77784 08766 4	12	1 pk.



WATER PROOF °F/°C FAHRENHEIT/ CELSIUS

8767J TempRite® Temperature Test Strips

- Temperature range: 180°F / 82°C
- 1 pack of 25 test strips

UPC	PACK QTY.	U of M
0 77784 08767 1	12	1 pk.



WATER PROOF °F/°C FAHRENHEIT/ CELSIUS

8769 TempRite® Temperature 3 in 1 Test Labels

- Temperature range: 160°F / 71°C, 170°F / 76°C, 180°F / 82°C
- 3 temperatures for testing
- 1 pack of 24 labels

UPC	PACK QTY.	U of M
0 77784 08769 5	12	1 pk.



21462-1J Dishwasher Test Thermometer

- Temperature range: 0°F / 220°F
- Mercury filled
- Tube sealed in open face armor case made of high temperature MINLON® plastic
- Maximum registering
- Individually packaged

UPC	PACK QTY.	U of M
0 77784 00128 8	1	1 ea.

food safety

TAYLOR

Temperature Zones

Fahrenheit	
220°	212°F Water boils at sea level.
210°	
200°	
190°	180° - 195°F Required for non-chemical sanitizing dishwashers.
180°	
170°	Cook to safe internal temperatures: 165°F - most bacteria killed Recommended internal temperature: Eggs at least 155°F Pork at least 160°F Poultry 170°F
160°	
150°	
140°	Cook to proper internal temperature: Ground, medium well at least 160°F, well 170°F
130°	135°F Minimum hot-holding temperature, including ready-to-eat & buffet style.
120°	
110°	120°F Minimum hot water temperature in a food facility.
100°	
90°	
80°	
70°	
60°	
50°	
40°	41°F Maximum cold holding temperature. 41°F Thaw frozen foods at this temperature.
30°	35°-41°F Set refrigerator temperature to insure proper food temperature. 32°F Water freezes.
20°	
10°	
0°	
-10°	Store frozen foods below 0°F.

Danger Zone

41°-135°F

Maintain cold foods at or below 41°F.
Maintain hot foods at or above 135°F.

Potentially hazardous hot food should be cooled rapidly. 135°F cooled to 70°F within 2 hours, 70°F cooled to 41°F within 4 hours. Using shallow pans with a product depth of no greater than 2 inches, the food should be placed in a refrigerator uncovered or loosely covered during the cooling process.

Never defrost food at room temperature. Use a refrigerator, continuously running cold water, a microwave or cook from frozen state. Frozen food that has been thawed should be cooked or otherwise processed before it may be refrozen.

Cook foods to the proper internal temperature. Use a metal probe thermometer to ensure food is cooked properly.

Wash your hands thoroughly with hot soapy water (before and after handling food) for a minimum of 20 seconds.

Avoid handling food when: ill, have a skin infection, or have cuts on the hands.

Never cross-contaminate from raw to cooked products.

Wash, rinse and sanitize cutting boards and knives between every use.

Reheat leftovers to 165°F internal temperature or higher, stirring constantly to cook evenly or microwave to 195°F. Never reheat leftovers more than once.

Keep kitchens, dining areas and storage rooms free from insects and rodents. Store chemicals away from food.

Taylor® Food Service Thermometers make food safety easy in your cooking environment. For more information on Taylor Precision Products, Inc. please call:
Phone: 800-225-4834 Fax: 575-526-4347
Website: www.shoptaylorusa.com

THERMOMETERS

Dial Thermometers/Clocks



166 Patio Clock

- Brushed silver metal bezel and silk screened graphics
- Weather resistant construction and clock movement cover
- 12" diameter
- 1 - AA battery required (not included)

UPC	PACK QTY.	U of M
0 77784 00166 0	5	1 ea.

MULTIUSE
°F/°C
FAHRENHEIT/
CELSIUS



497J Humidiguide Dial Thermometer

- Temperature range: -60°F/120°F and -50°C/50°C
- Humidity range: 20% to 90%
- Brushed silver metal bezel and silk screened graphics
- Large, easy-to-read face
- Includes a relative humidity scale
- 12" diameter

UPC	PACK QTY.	U of M
0 77784 00497 5	5	1 ea.

°F/°C
FAHRENHEIT/
CELSIUS



681 Extra Large Thermometer

- Temperature range: -60°F/120°F and -50°C/50°C
- Brushed silver metal bezel and silk screened graphics
- Large, easy-to-read face
- Weather resistant construction
- 18" diameter

UPC	PACK QTY.	U of M
0 77784 00681 8	3	1 ea.

°F/°C
FAHRENHEIT/
CELSIUS



1750 Atomic Clock/Thermometer ★

- Temperature range: 14°F/122°F and -10°C/50°C
- 9.25" atomic wall clock with indoor thermometer
- Extra large 3.25" LCD readout
- Atomic time and date with manual setting
- Calendar with month, date and day
- 1 - AA battery not included

UPC	PACK QTY.	U of M
0 77784 02450 8	4	1 ea.

MULTIUSE
DIGITAL DISPLAY
°F/°C
FAHRENHEIT/
CELSIUS

°F/°C
FAHRENHEIT/
CELSIUS



6714 Indoor/Outdoor
13.25" Dial Thermometer

- Temperature range: -60°F/120°F and -50°C/50°C
- ColorTrak design features bright and colorful numbers
- Framed in a glossy white bezel
- Weather resistant construction
- 13.25" diameter

UPC	PACK QTY.	U of M
0 77784 06714 7	4	1 ea.

Dial Thermometers/Clocks (cont.)


5630 6" Black and White Bi-Metal Thermometer

- Temperature range: -60°F/120°F
- Bold and vibrant silk-screened graphics
- °F scale only
- Easy-to-read numerals with clear bezel
- Wall bracket included for mounting

UPC	PACK QTY.	U of M
0 77784 05630 1	6	1 ea.


5636 6" Bi-Metal Thermometer HACCP Cooler/Freezer ★

- Temperature range: 0°F/80°F and -17°C/26°C
- Bold and vibrant silk-screened graphics
- Easy-to-read numerals with clear bezel
- Includes color temperature zones for proper food temperature storage
- Wall bracket included for mounting

UPC	PACK QTY.	U of M
0 77784 02586 4	6	1 ea.


5637 6" Bi-Metal Thermometer HACCP Prep/Dry Storage ★

- Temperature range: 0°F/100°F and -17°C/37°C
- Bold and vibrant silk-screened graphics
- Easy-to-read numerals with clear bezel
- Includes color temperature zones for proper food temperature storage
- Wall bracket included for mounting

UPC	PACK QTY.	U of M
0 77784 02587 1	6	1 ea.


5680 13.25" Thermometer HACCP Cooler/Freezer ★

- Temperature range: 0°F/80°F and -17°C/26°C
- Bold and vibrant silk-screened graphics
- Easy-to-read numerals with white bezel
- Includes color temperature zones for proper food temperature storage

UPC	PACK QTY.	U of M
0 77784 02588 8	4	1 ea.


5681 13.25" Thermometer HACCP Prep/Dry Storage ★

- Temperature range: 0°F/100°F and -17°C/37°C
- Bold and vibrant silk-screened graphics
- Easy-to-read numerals with white bezel
- Includes color temperature zones for proper food temperature storage

UPC	PACK QTY.	U of M
0 77784 02589 5	4	1 ea.

THERMOMETERS

Window/Wall Thermometers



°F/C
FARENHEIT/
CELSIUS

1105J Dry Storage Thermometer

- Temperature range: 0°F/120°F and -30°C/50°C
- Easy-to-read in poor lighting
- 12" long
- Packed in individual carton

UPC	PACK QTY.	U of M
0 77784 01105 8	12	1 ea.



°F/C
FARENHEIT/
CELSIUS

5132N Utility Wall Thermometer

- Temperature range: -40°F/120°F and -40°C/50°C
- White aluminum back with plastic end caps for secure mounting
- Large, easy-to-read face
- Weather resistant and rustproof

UPC	PACK QTY.	U of M
0 77784 05132 0	6	1 ea.



°F/C
FARENHEIT/
CELSIUS

5154 Wall Thermometer

- Temperature range: -40°F/120°F and -40°C/50°C
- Curved look with large, easy-to-read numerals in bright red & blue
- Includes aluminum bracket for mounting
- Weather resistant and rustproof

UPC	PACK QTY.	U of M
0 77784 05154 2	6	1 ea.



°F/C
FARENHEIT/
CELSIUS

1106J Cold/Dry Storage Thermometer

- Temperature range: -50°F/70°F and -40°C/20°C
- Easy-to-read in poor lighting
- 12" long
- Packed in individual carton

UPC	PACK QTY.	U of M
0 77784 01106 5	12	1 ea.



°F/C
FARENHEIT/
CELSIUS

5135N Wall Thermometer

- Temperature range: -60°F/120°F and -50°C/50°C
- White aluminum for indoor or outdoor use
- Large, easy-to-read face
- Weather resistant and rustproof

UPC	PACK QTY.	U of M
0 77784 05135 1	6	1 ea.



°F/C
FARENHEIT/
CELSIUS

5316N Window Thermometer

- Temperature range: -40°F/120°F and -40°C/50°C
- White aluminum back with large, easy-to-read numerals
- Rustproof bracket with adjustable design for multi-directional viewing

UPC	PACK QTY.	U of M
0 77784 05316 4	6	1 ea.



°F/C
FARENHEIT/
CELSIUS

5109 Jumbo Wall Thermometer

- Temperature range: -40°F/120°F and -40°C/50°C
- Bright red reading tube with extra large colorful numbers
- Weather resistant and rustproof for quick, accurate temperature checks inside or outside

UPC	PACK QTY.	U of M
0 77784 05109 2	6	1 ea.



°F/C
FARENHEIT/
CELSIUS

5153 Window Thermometer

- Temperature range: -40°F/120°F and -40°C/50°C
- Curved look with large, easy-to-read numerals in bright blue & green
- Includes aluminum bracket for mounting
- Weather resistant and rustproof

UPC	PACK QTY.	U of M
0 77784 05153 5	6	1 ea.



5321N 3 ½" Dial Stick-on Window Thermometer

- Temperature range: -40°F/120°F
- Read outside temperature from inside
- Easy to apply suction cup mount
- Weather resistant and rustproof

UPC	PACK QTY.	U of M
0 77784 05321 8	6	1 ea.

Window/Wall Thermometers (cont.)



°F/°C
FAHRENHEIT/
CELSIUS

5327 Indoor/Outdoor Thermometer

- Temperature range: -40°F/100°F and -40°C/40°C
- Read indoor and outdoor temperatures from inside
- Bold numerals in bright blue and red

UPC	PACK QTY.	U of M
0 77784 05327 0	6	1 ea.



°F/°C
FAHRENHEIT/
CELSIUS

5329 Indoor/Outdoor Thermometer

- Temperature range: -40°F/120°F and -40°C/40°C
- Humidity range: 10% to 80%
- Dial to read indoor humidity
- Large, easy-to-read face
- Red for indoor temperature and blue for outdoor temperature

UPC	PACK QTY.	U of M
0 77784 05329 4	4	1 ea.



°F/°C
FAHRENHEIT/
CELSIUS

5380N 1 3/4" Dial Stick-on Window Thermometer

- Temperature range: -40°F/120°F and -40°C/50°C
- Indoor/outdoor multi-purpose thermometer easily mounts with double-faced adhesive
- Weather resistant and rustproof

UPC	PACK QTY.	U of M
0 77784 05380 5	12	1 ea.




MULTIUSE

5504 Indoor Humidiguide and Thermometer

- Temperature range: 20°F/100°F
- Humidity range: 10% to 80%
- Displays relative humidity and temperature
- 4" square case hangs or stands

UPC	PACK QTY.	U of M
0 77784 05504 5	6	1 ea.

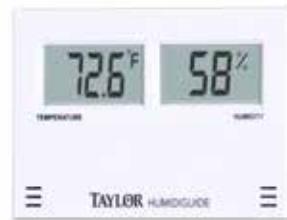

°F/°C
FAHRENHEIT/
CELSIUS

5566 Digital Hygrometer with Thermometer

- Temperature range: -40°F/158°F and -40°C/70°C
- Humidity range: 10%-95%
- Large, easy-to-read LCD
- Wall mount or table top
- 300 days of continuous reading battery life
- 2 - AAA batteries not included

UPC	PACK QTY.	U of M
0 77784 05566 3	12	1 ea.

THERMOMETERS

Max/Min Thermometers



AAA °F/C
BATTERY INCLUDED FAHRENHEIT/ CELSIUS

1441E Digital Max/Min Thermometer

- Temperature range: -20°F/120°F and -29°C/50°C
- Records temperature readings for 7 days at a time
- Dual 3 meter probes for independent readings
- 2 - AAA batteries included

AAA °F/C

BATTERY INCLUDED FAHRENHEIT/ CELSIUS

1442 Critical Care Thermometer

- Temperature range: -40°F/221°F and -40°C/105°C
- For monitoring temperature critical materials
- Programmable high and low limit alarms
- 96 hour memory of high and low temperatures
- Records a history of alarm breeches included time and duration
- Dual 6" glycol-tolerant probes
- Password protected
- 2 - AAA batteries included



°F/C
FAHRENHEIT/ CELSIUS

1446 Wireless Refrigeration Thermometer

- Temperature range: -22°F/104°F and -30°C/40°C
- Two remote sensors transmit reading to display unit
- Visual and audible alarms based on user set min and max temperatures
- Transmission range up to 65 feet from display unit
- Audible and visual alarm with 15 minute delay
- 2 - AAA batteries for base unit and 4 - AA batteries for sensors (not included)

UPC	PACK QTY.	U of M
0 77784 01441 7	4	1 ea.

UPC	PACK QTY.	U of M
0 77784 01442 4	1	1 ea.

UPC	PACK QTY.	U of M
0 77784 01446 2	1	1 ea.



°F/C
FAHRENHEIT/ CELSIUS

5458 Max/Min Thermometer

- Temperature range: -40°F/120°F
- Magnet reset, registers high and low reading from last setting
- Mercury filled

°F/C

FAHRENHEIT/ CELSIUS



5459 Max/Min Thermometer

- Temperature range: -40°C/50°C
- Magnet reset, registers high and low reading from last setting
- Mercury filled



°F/C
FAHRENHEIT/ CELSIUS

5460 Max/Min Thermometer

- Temperature range: -40°F/120°F and -40°C/50°C
- Push button reset and magnet reset
- Permacolor™ filled

UPC	PACK QTY.	U of M
0 77784 54580 5	1	1 ea.

UPC	PACK QTY.	U of M
0 77784 54590 4	1	1 ea.

UPC	PACK QTY.	U of M
0 77784 05460 4	4	1 ea.

Pocket Case Thermometers



- Plastic case included
- Permacolor™ filled



21412-1J

- Temperature range: -50°F/120°F

UPC



PACK QTY.

12

U of M

1 ea.

21420-1J

- Temperature range: 0°F/220°F

UPC



PACK QTY.

12

U of M

1 ea.

21424-1J

- Temperature range: -15°C/105°C

UPC



PACK QTY.

12

U of M

1 ea.

21432-1J

- Temperature range: -40°C/50°C

UPC



PACK QTY.

12

U of M

1 ea.

THERMOMETERS

Digital Pocket Test Thermometers - Comparison Guide



GOOD



3516



9840RB



1476FDA



9840PRN



9841RB



3519FDA

Product Specifications	3516	9840RB	9840PRN	9841RB	1476FDA
Temperature range:	-40°/302°F	-40°/302°F -40°/150°C	-40°/302°F -40°/150°C	-40°/500°F -40°/260°C	-40°/450°F -40°/232°C
Accuracy:	+/- 2°F	+/- 2°F	+/- 2°F	+/- 2°F	+/- 2°F
Certifications:	NSF	NSF	NSF	NSF	NSF
Dimensions:	<ul style="list-style-type: none"> • Stem Length 4.75" • Probe Diameter 3.8mm 	<ul style="list-style-type: none"> • Stem Length 4.69" • Probe Diameter 1.5mm 	<ul style="list-style-type: none"> • Stem Length 4.69" • Probe Diameter 1.5mm 	<ul style="list-style-type: none"> • Stem Length 4.69" • Probe Diameter 1.5mm 	<ul style="list-style-type: none"> • Stem Length 3.43" • Probe Diameter 1.6mm
Features:	<ul style="list-style-type: none"> • Waterproof • °F & °C Selectable • On/Off • Hold • Auto Shut Off • Protective Rubber Boot • 1.5mm Step Down Probe • Calibration • Max/Min Memory 				
LCD Size:	0.3"	0.4"	0.4"	0.4"	0.6"
Battery Type:	LR44 (included)	LR44 (included)	LR44 (included)	LR44 (included)	LR44 (included)
Warranty:	1 Year	1 Year	1 Year	1 Year	1 Year

BETTER

BEST



9842FDA



9848EFDA



9877FDA



3519PRFDA



9878E



9878EPR

3519FDA	3519PRFDA	9842FDA	9848EFDA	9877FDA	9878E	9878EPR
-40°/450°F -40°/232°C	-40°/450°F -40°/232°C	-40°/450°F -40°/232°C	-40°/450°F -40°/232°C	-40°/450°F -40°/232°C	-40°/500°F -40°/260°C	-40°/500°F -40°/260°C
+/- 2°F	+/- 1°F	+/- 1°F				
NSF						
3.19" 1.5mm	3.19" 1.5mm	4.81" 1.5mm	3.00" 1.5mm	2.81" 1.5mm	5.11" 1.5mm	5.11" 1.5mm
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
0.5"	0.5"	0.5"	0.5"	0.3"	0.4"	0.4"
LR44 (included)	LR44 (included)	LR44 (included)	CR2032 (included)	LR44 (included)	CR2032 (included)	CR2032 (included)
1 Year						

TIMERS

Mechanical



60:00
TIMER RANGE

5830 Stainless Steel 60 Minute Timer

- Timer range: 60 minutes
- Stainless steel housing
- Rubberized turn knob and slip proof base
- Long ring



60:00
TIMER RANGE

5831N 60 Minute Timer

- Timer range: 60 minutes
- Large easy to read numbers
- Long ring



60:00
TIMER RANGE

5832 60 Minute Timer

- Timer range: 60 minutes
- Small compact size
- Long ring

UPC	PACK QTY.	U of M
0 77784 05830 5	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05831 2	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05832 9	6	1 ea.

Digital



99:59
TIMER RANGE
0.5"
DIGITAL DISPLAY
MAGNETIC

5806 Digital Multi-Purpose Timer

- Timer range: 99 minutes and 59 seconds
- Small and compact design
- Counts up and counts down
- Clip/magnet/stand positioning
- Splash resistant
- 1 - AAA battery included



99:59
TIMER RANGE
0.8"
DIGITAL DISPLAY
BATTERY INCLUDED
MEMORY

5822 Memory Digital Timer

- Counts up to 99 minutes 59 seconds
- Recalls last timing event for easy programming.
- 0.8" LCD readout
- Count up and countdown feature
- Clip/magnet/stand positioning
- 1 - AAA battery included



MULTIUSE
VARIETY OF RINGS
23:59
TIMER RANGE
1.5"
DIGITAL DISPLAY
BATTERY INCLUDED

5828 Dual Event Digital Timer/Clock

- Each timer counts up to 23 hours 59 minutes 59 seconds
- Times two events simultaneously
- 1.5" LCD readout
- Clock feature
- Clip/magnet/stand positioning
- 1 - AAA battery included

UPC	PACK QTY.	U of M
0 77784 05806 0	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05822 0	6	1 ea.

UPC	PACK QTY.	U of M
0 77784 05828 2	6	1 ea.

Digital (cont.)




99:59
TIMER RANGE
DIGITAL DISPLAY
MAGNETIC

5829 Digital Timer/Clock

- Timer range: 99 minutes and 59 seconds
- 10 numeric buttons makes it easy to input time
- Clock feature
- Clip/magnet/stand positioning
- 1 - AAA battery included

UPC	PACK QTY.	U of M
0 77784 05829 9	6	1 ea.

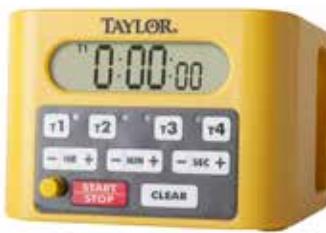

MULTIUSE VARIETY OF RINGS 4 EVENTS SAME TIME DIGITAL DISPLAY BATTERY INCLUDED

5839N 4 Event Digital Timer

- Each timer counts up to 9 hours 59 minutes 59 seconds
- Times 4 events simultaneously
- 100 decibel alarms with a distinctive ring for each timer
- Adjustable volume control knob
- Lights flash when timer reaches zero
- Stand or wall mount
- 4 - AA batteries included

UPC	PACK QTY.	U of M
0 77784 02885 8	2	1 ea.



MULTIUSE VARIETY OF RINGS 99:59 TIMER RANGE 4 EVENTS SAME TIME DIGITAL DISPLAY BATTERY INCLUDED

5862 Compact 4 Event Digital Timer

- Each timer counts up to 99 hours 59 minutes 59 seconds
- Times up to 4 events simultaneously
- Extra large LCD readout
- 4 distinct beep tones
- Count up and down features
- 12/24 hour clock
- Self standing/magnetic mounting feature
- 2 - LR44 batteries included

UPC	PACK QTY.	U of M
0 77784 00869 0	6	1 ea.



MULTIUSE MEMORY WATER PROOF BACKLIGHT 4 EVENTS SAME TIME AAA

5863 Water & Impact Resistant Timer

- Times up to 24 hours 59 minutes 59 seconds
- Dust and water resistant
- IP65 rated
- Impact resistant up to 4 feet
- 4 level adjustable volume
- High temp LED readout
- Counts up and counts down with memory recall
- Backlight and clock features
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 05863 3	6	1 ea.



99:59 TIMER RANGE 1375" DIGITAL DISPLAY MAGNETIC

5896 Jumbo Readout Digital Timer

- Timer range: 99 minutes and 59 seconds
- Memory function to recall last timing event
- Extra loud alarm
- Magnet/stand positioning
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 01036 5	6	1 ea.



99:59 TIMER RANGE 00" DIGITAL DISPLAY MAGNETIC

5816N Chef's Timer & Stopwatch

- Timer range: 99 minutes and 59 seconds
- Includes lanyard for convenience
- Counts up and counts down
- Magnet positioning
- 1 - LR44 battery included

UPC	PACK QTY.	U of M
0 77784 05816 9	3	1 ea.

TIMERS

Digital (cont.)



99:59
TIMER RANGE
DIGITAL DISPLAY
BATTERY INCLUDED

5827-21 Digital Timer

- Times up to 99 minutes 59 seconds
- 0.7" LCD readout
- Clip/magnet/stand positioning
- 1 - AAA battery included

UPC	PACK QTY.	U of M
0 77784 58272 5	4	1 ea.



23:59
TIMER RANGE
DIGITAL DISPLAY
MEMORY
BATTERY INCLUDED

5847-21 Digital Timer

- Times up to 23 hours 59 minutes 59 seconds
- Memory and clock function
- Count up and down features
- Extra large LCD for easy readout
- Magnet or stand positioning
- 1 - AAA battery included

UPC	PACK QTY.	U of M
0 77784 01032 7	3	1 ea.



14
4 EVENTS SAME TIME
DIGITAL DISPLAY
MEMORY
BATTERY INCLUDED

5849 4 Event Timer with Whiteboard

- Each timer counts up to 24 hours 59 minutes
- 0.8" LCD readout
- Times up to 4 events simultaneously
- Different tone for each event
- Convenient whiteboard plus dry-erase pen with eraser for notes
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 05849 7	6	1 ea.



23:59:59
TIMER RANGE
0.625"
DIGITAL DISPLAY
MAGNETIC

5873 Continuous Ring Digital Timer/Clock ★

- Timer range: 23 hours, 59 minutes and 59 seconds
- Super loud timer up to 95 decibels
- Timer continues to ring until the user turns it off
- Features a clock and count up/count down
- 2 - AAA batteries included

UPC	PACK QTY.	U of M
0 77784 02686 1	4	1 ea.



Economy Digital Scales



AAA
BATTERY INCLUDED
 WEIGHS LIQUID
 NSF

UPC PACK QTY. 4 U of M 1 ea.

1020NFS Digital Kitchen Scale

- Dry Capacity: 11 lb x 0.1 oz/5 kg x 1 g
- Liquid Capacity: 175 fl. oz x 0.1 fl. oz/5000 ml x 1 ml
- Measures either dry or liquid ingredients
- Large 0.6" LCD readout
- Stainless steel platform on black base
- Add & weigh feature
- 2 - AAA batteries included



AAA
BATTERY INCLUDED
 WEIGHS LIQUID
 ALLERGY
 NSF

UPC PACK QTY. 4 U of M 1 ea.

1020PRNFS Digital Kitchen Scale

- Dry Capacity: 11 lb x 0.1 oz/5 kg x 1 g
- Liquid Capacity: 175 fl. oz x 0.1 fl. oz/5000 ml x 1 ml
- Measures either dry or liquid ingredients
- Large 0.6" LCD readout
- Stainless steel platform on purple base
- Add & weigh feature
- For use in allergy programs
- 2 - AAA batteries included



±0 TARE
 0.9" DIGITAL DISPLAY
 CR2032 BATTERY INCLUDED

UPC PACK QTY. 4 U of M 1 ea.

3817 Compact Digital Kitchen Scale

- Capacity: 11 lb x 0.1 oz / 5 kg x 1 g
- Small size for easy storage and portability
- Auto shut off & tare features
- Color in white
- 1 - CR2032 battery included



±0 TARE
 0.9" DIGITAL DISPLAY
 CR2032 BATTERY INCLUDED

UPC PACK QTY. 4 U of M 1 ea.

3817R Compact Digital Kitchen Scale

- Capacity: 11 lb x 0.1 oz / 5 kg x 1 g
- Small size for easy storage and portability
- Auto shut off & tare features
- Color in red
- 1 - CR2032 battery included



AAA
BATTERY INCLUDED

UPC PACK QTY. 6 U of M 1 ea.

1250BK Compact Digital Kitchen Scale

- Capacity: 16 oz x 0.005 oz / 500 g x 0.01 g
- Ultra fine 0.005 oz / 0.01 g increments
- Stainless steel platform
- Weighing cover inverts for use as a tray
- 2 - AAA batteries included



±0 TARE
 0.9" DIGITAL DISPLAY
 RECALIBRATE
 CAPACITY
 NSF

TE2FT Compact Digital Portion Control Kitchen Scale ★

- Capacity: 2 lb x 0.1 oz / 1 kg x 1 g
- 7.15" x 7.15" stainless steel platform
- Extra large 0.9" LCD readout
- Tare and hold function
- Calibration feature
- Auto-off and disable auto-off feature when powered by batteries
- AC adapter included
- 2 - AAA batteries not included
- Inventory will be available July 2017

SCALES

Digital Portion Control Scales (cont.)



TARE **0.5"** **DIGITAL DISPLAY** **RECALIBRATE** **CAPACITY** **NSF**

UPC **PACK QTY.** **U of M**

0 77784 01800 2

TE10FT Compact Digital Portion Control Kitchen Scale

- Capacity: 11 lb x 0.1 oz / 5 kg x 1 g
- 5.38" x 5.38" stainless steel platform
- Extra large 0.9" LCD readout
- Tare and hold function
- Calibration feature
- Auto-off and disable auto-off feature when powered by batteries
- AC adapter included
- 2 - AAA batteries not included



TARE **0.5"** **DIGITAL DISPLAY** **RECALIBRATE** **NSF**

UPC **PACK QTY.** **U of M**

0 77784 01802 6

TE32FT Compact Digital Portion Control Kitchen Scale

- Dry Capacity: 2 lb x 0.01 oz / 1 kg x 0.5 g
- 5.38" x 5.38" stainless steel platform
- Extra large 0.9" LCD readout
- Tare and hold function
- Calibration feature
- Auto-off and disable auto-off feature when powered by batteries
- AC adapter included
- 2 - AAA batteries not included



TARE **0.5"** **DIGITAL DISPLAY** **RECALIBRATE** **CAPACITY** **NSF**

UPC **PACK QTY.** **U of M**

0 77784 01799 9

TE11FT Digital Portion Control Kitchen Scale

- Capacity: 11 lb x 0.1 oz / 5 kg x 1 g
- 7.15" x 7.15" stainless steel platform
- Extra large 0.9" LCD readout
- Tare and hold function
- Calibration feature
- Auto-off and disable auto-off feature when powered by batteries
- AC adapter included
- 2 - AAA batteries not included



TARE **0.5"** **DIGITAL DISPLAY** **RECALIBRATE** **NSF**

UPC **PACK QTY.** **U of M**

0 77784 01801 9

TE22FT Digital Portion Control Kitchen Scale

- Capacity: 22 lb x 0.1 oz / 10 kg x 1 g
- 7.15" x 7.15" stainless steel platform
- Extra large 0.9" LCD readout
- Tare and hold function
- Calibration feature
- Auto-off and disable auto-off feature when powered by batteries
- AC adapter included
- 2 - AAA batteries not included



TARE **0.5"** **DIGITAL DISPLAY** **RECALIBRATE** **CAPACITY** **NSF**

UPC **PACK QTY.** **U of M**

0 77784 01323 6

TE220S Digital Portion Control Kitchen Scale with Oversized Platform

- Capacity: 22 lb x 0.1 oz / 10 kg x 1 g
- 11.25" x 7.25" stainless steel removable, washable platform
- Tare and hold function
- Auto-off and disable auto-off features when powered by batteries
- AC adapter included
- 2 - AAA batteries not included



TARE **0.5"** **DIGITAL DISPLAY** **RECALIBRATE** **CAPACITY** **NSF**

0 77784 01324 6

TE330S Digital Portion Control Kitchen Scale with Oversized Platform

- Capacity: 33 lb x 0.1 oz / 15 kg x 1 g
- 11.25" x 7.25" stainless steel removable, washable platform
- Tare and hold function
- Dual mode calibration feature
- Auto-off and disable auto-off features when powered by batteries
- AC adapter included
- 2 - AAA batteries not included

► Available July 2017

Digital Portion Control Scales (cont.)



TARE **0.5"** **DIGITAL DISPLAY** **11 LB / 5 KG CAPACITY** **NSF**

TE660S Digital Portion Control Kitchen Scale with Oversized Platform ★

- Capacity: 66 lb x 0.1 oz / 30 kg x 2 g
- 11.25" x 7.25" stainless steel removable, washable platform
- Tare and hold function
- Dual mode calibration feature
- Auto-off and disable auto-off features when powered by batteries
- AC adapter included
- 2 - AAA batteries not included
- Available July 2017



TARE **NSF**
UPC **PACK QTY.** **U of M**
 4 1 ea.
 0 77784 10000 4

TE10R Digital Portion Control Scale

- Capacity: 10 lb x 0.1 oz / $\frac{1}{8}$ oz, $\frac{1}{4}$ oz / 2 g, 5 g
- Removable 5" x 8" stainless steel platform
- Tare and hold function
- Auto-off and disable auto-off features when powered by batteries
- Rechargeable battery and AC adapter included



TARE **BACKLIGHT** **RECALIBRATE** **WEIGHS LIQUID**
UPC **PACK QTY.** **U of M**
 4 1 ea.
 0 77784 00567 5

TE10T 10 lb Digital Portion Control Scale with Tower Readout

- Dry Capacity: 10 lb x 0.002 lb/160 oz x 0.05 oz / 5000 g x 0.001 kg
- Liquid Capacity: 169 fl. oz x 0.05 fl. oz / 5000 ml x 1 ml
- 7" x 6.5" stainless steel platform.
- Extra large 1.5" LCD readout with backlight
- Tare and hold function with auto-off feature and disable auto-off feature when powered by batteries
- Recalibratable
- Low battery indicator
- AC adapter included
- 4 - AA batteries not included



TARE **BACKLIGHT** **RECALIBRATE** **NSF**
UPC **PACK QTY.** **U of M**
 6 1 ea.
 0 77784 00021 2

TE21P 21 oz Precision Measurement Digital Scale

- Capacity: 21 oz x 0.01 oz / 0.0002 lb / 600 g x 0.1 g
- 5" x 5.75" removable stainless steel platform
- Large 1" LCD readout with backlight
- Tare and hold functions
- Counting feature for exact measurement
- Recalibratable
- Auto-off and disable auto-off feature when powered by batteries
- AC adapter included
- 4 - AA batteries not included



TARE **BACKLIGHT** **RECALIBRATE** **WATER PROOF** **WEIGHS LIQUID**
UPC **PACK QTY.** **U of M**
 4 1 ea.
 0 77784 01788 3

TE10CSW Waterproof Digital Portion Control Scale

- Dry Capacity: 10 lb x 0.002 lb / 10 lb x 0.005 oz / 160 oz x 0.05 oz / 5000 g x 1 g
- Liquid Capacity: 160 fl. oz x 0.05 fl. oz / 5000 ml x 1 ml
- 4.75" x 5.9" stainless steel platform
- Waterproof for easy cleaning
- Tare function
- Auto-off and disable auto-off features when powered by batteries
- Low battery and overload indicators
- Field recalibratable
- IP 65 rated
- AC adapter included
- 1 - 9 volt battery not included



TARE **BACKLIGHT** **RECALIBRATE** **WATER PROOF** **WEIGHS LIQUID**
UPC **PACK QTY.** **U of M**
 4 1 ea.
 0 77784 00568 2

TE10SSW Waterproof Digital Portion Control Scale

- Dry Capacity: 10 lb x 0.005 lb / 10 lb x 0.1 oz / 10 lb x 1/8 oz
- Liquid Capacity 160 oz x 0.005 oz / 160 oz x 1/8 oz / 5000 g x 1 g
- 6.7" x 7" stainless steel platform and housing
- Waterproof for easy cleaning
- Large easy-to-read 1" LCD readout with backlight
- Tare and hold with high/low weigh features
- Field recalibratable
- IP 67 rated
- Rechargeable battery and AC adapter included

SCALES

Digital Portion Control Scales (cont.)



TARE **BACKLIGHT** **RECALIBRATE** **WATER PROOF** **WEIGHS LIQUID**



TE20SSW Waterproof Digital Portion Control Scale ★

- Dry Capacity: 20 lb x 0.005 lb / 20 lb x 0.05 oz / 20 lb x 1/8 oz
- Liquid Capacity: 320 oz x 0.05 oz / 320 oz x 1/8 oz / 9000 g x 1 g
- 6.7" x 7" stainless steel platform and housing
- Waterproof for easy cleaning
- Large easy-to-read 1" LCD readout with backlight
- Tare and hold with high/low weigh features
- Field recalibratable
- IP 67 rated
- Rechargeable battery and AC adapter included
- Available July 2017



TARE **DIGITAL DISPLAY** **RECALIBRATE** **CAPACITY**



UPC **PACK QTY.** **U of M**

0 77784 01293 2

2 1 ea.

TE30WD Compact Digital Portion Control Scale with Wireless Display

- Capacity: 0-10 lb x 0.05 oz / 0-5 kg x 0.002 kg (2g)
- 10-30 lb x 0.1 oz / 5-15 kg x 0.005 kg (5 g)
- Oversized 14" x 14" removable stainless steel platform
- Wireless display head
- Up to 3 channels for wireless transmission
- Touchless tare feature
- Disable auto-off feature when powered by batteries
- AC adapter included for both base and remote
- Recalibratable
- Base: 6 - AA batteries (not included)
- Remote: 4 - AA batteries (not included)



TARE **DIGITAL DISPLAY** **CAPACITY**



TE50 Digital Portion Control Scale with Handle

- Capacity: 50 lb x 0.5 oz / 22 kg x 0.01 kg
- 13.5" x 11.5" stainless steel platform
- Built-in handle for easy transportation
- Tare and hold functions
- Stable weight indicator
- Large easy-to-read 1" LCD readout
- Disable auto-off feature when powered by batteries
- AC adapter included
- Recalibratable
- 4 - AA batteries not included

TP16FF French Fry / Taco Holder Scale

- Capacity: 16 oz x 1/4 oz
- Antimicrobial housing with 4.5" x 2.5" NSF food grade platform
- Internal stop mechanism and angled dial
- Includes fixed french fry / taco holder



ANTI-MICROBIAL **CAPACITY**

UPC **PACK QTY.** **U of M**

0 77784 00160 8



ANTI-MICROBIAL **CAPACITY**

UPC **PACK QTY.** **U of M**

0 77784 00016 8

4 1 ea.

TP16 Compact Analog Portion Control Scale

- Capacity: 16 oz x 1/4 oz
- Antimicrobial housing with 4" x 4.5" stainless steel NSF food grade platform
- Internal stop mechanism and angled dial



ANTI-MICROBIAL **CAPACITY**

UPC **PACK QTY.** **U of M**

0 77784 00003 8

TP32 Ice Cream Scale

- Capacity: 32 oz x 1/4 oz
- Antimicrobial housing with 4.5" x 4" NSF food grade platform
- Internal stop mechanism and angled dial

Analog Portion Control Scales



TS32F Analog Portion Control Scale with Fixed Dial

- Capacity: 32 oz x 1/4 oz / 900 g x 5 g
- Rugged stainless steel construction with angled dial design
- Protective shatterproof lens and removable 6" x 5.25" platform



UPC PACK QTY. U of M
 4 1 ea.

0 77784 00032 8



TS5 Analog Portion Control Scale with Rotating Dial

- Capacity: 5 lb x 1/2 oz / 2.2 kg x 20 g
- Rugged stainless steel construction with angled dial design and rotating dial
- Protective shatterproof lens and removable 6" x 5.25" platform



UPC PACK QTY. U of M
 4 1 ea.

0 77784 00051 9



TS25KL Analog Portion Control Scale with Rotating Dial

- Capacity: 25 lb x 2 oz / 11 kg x 50 g
- Rugged stainless steel construction with angled dial design and rotating dial
- Protective shatterproof lens and removable 6" x 5.25" platform



UPC PACK QTY. U of M
 4 1 ea.

0 77784 00250 6



TS32 Analog Portion Control Scale with Rotating Dial

- Capacity: 32 oz x 1/4 oz / 900 g x 5 g
- Rugged stainless steel construction with angled dial design and rotating dial
- Protective shatterproof lens and removable 6" x 5.25" platform



UPC PACK QTY. U of M
 4 1 ea.

0 77784 00320 6



TS32D Analog Portion Control Scale with Dashpot

- Capacity: 32 oz x 1/4 oz / 900 g x 5 g
- Rugged stainless steel construction with angled dial design and rotating dial
- Protective shatterproof lens and removable 6" x 5.25" platform
- Adjustable dashpot knob



UPC PACK QTY. U of M
 4 1 ea.

0 77784 02270 2



TS50 Analog Portion Control Scale with Rotating Dial

- Capacity: 50 lb x 4 oz / 22 kg x 113 g
- Rugged stainless steel construction with angled dial design and rotating dial
- Protective shatterproof lens and removable 6" x 5.25" platform



UPC PACK QTY. U of M
 4 1 ea.

0 77784 00500 2

SCALES

Heavy Duty Mechanical Scales



UPC PACK QTY. U of M
0 77784 00232 2



UPC PACK QTY. U of M
0 77784 00050 2



THD32 Heavy Duty Mechanical Scale

- Capacity: 32 oz x 1/8 oz / 900 g x 2 g
- 9" x 9" stainless steel NSF food grade platform with internal stop mechanism
- Features corrosion-resistant weighing mechanism
- Dual measurement
- Shatterproof lens with bold dial



UPC PACK QTY. U of M
0 77784 00332 9

THD32D Heavy Duty Mechanical Scale with Dashpot

- Capacity: 32 oz x 1/8 oz / 900 g x 2 g
- 9" x 9" stainless steel NSF food grade platform with internal stop mechanism
- Features corrosion-resistant weighing mechanism
- Dual measurement
- Shatterproof lens with bold dial
- Adjustable dashpot with knob for tare feature

Receiving Scales

THD50 Heavy Duty Mechanical Scale

- Capacity: 50 lb x 2 oz / 22 kg x 100 g
- 9" x 9" stainless steel NSF food grade platform with internal stop mechanism
- Features corrosion-resistant weighing mechanism
- Dual measurement
- Shatterproof lens with bold dial



UPC PACK QTY. U of M
0 77784 00150 9

TE150 Receiving Scale with Stainless Steel Platform

- Capacity: 150 lb x 1/4 lb / 68 kg x 1 g
- 12.25" x 12" stainless steel platform with 6' coiled cord
- Large easy-to-read 1" LCD readout
- Tare and hold function
- Disable auto-off feature when powered by batteries
- AC adapter included
- 6 - AA batteries not included



UPC PACK QTY. U of M
0 77784 00150 9

TE250 Receiving Scale with Stainless Steel Platform


- Capacity: 250 lb x 0.2 lb / 120 kg x 100 g
- 13.5" x 11.5" stainless steel platform
- Built-in handle for easy transportation
- Includes RS232 and USB connectors for data transmission and/or printing capabilities
- Tare and hold functions
- Stable weight indicator
- Large easy-to-read 1" LCD readout
- Disable auto-off feature when powered by batteries
- AC adapter included
- Available July 2017



UPC PACK QTY. U of M
0 77784 00400 5

TE400 Receiving Scale with Steel Tread Plate Platform

- Capacity: 400 lb x 1/2 lb / 181 kg x 0.2 kg
- 12.25" x 12" steel tread plate platform with 6' coiled cord
- Large easy-to-read 1" LCD readout
- Tare and hold function
- Disable auto-off feature when powered by batteries
- AC adapter included
- 6 - AA batteries not included



UPC PACK QTY. U of M
0 77784 00400 5

Receiving Scales (cont.)



TR250 Heavy Duty Receiving Scale

- Capacity: 250 lb x 1 lb
- Heavy duty powder coated metal with press lock feature

CAPACITY

UPC	PACK QTY.	U of M
0 77784 02284 9	2	1 ea.

Hanging Scales



3070 Industrial Hanging Scale

- Capacity: 70 lb x 1 lb / 32 kg x 500 g
- Dual lb/kg vertical scale with hanging hook
- Item #30704104

CAPACITY

UPC	PACK QTY.	U of M
0 77784 00689 4	4	1 ea.



3305 Industrial Hanging Scale Scoop

- Durable stainless steel scoop for use with hanging scales
- Item #33054104N

STAINLESS STEEL

UPC	PACK QTY.	U of M
0 77784 03305 0	4	1 ea.



3328 Industrial Hanging Scale

- Capacity: 280 lb x 5 lb / 128 kg x 2 kg
- Dual lb/kg vertical scale with hanging hook
- Item #33284104

CAPACITY

UPC	PACK QTY.	U of M
0 77784 00688 7	4	1 ea.



3470 Industrial Hanging Scale

- Capacity: 70 lb x 0.5 lb / 32 kg x 250 g
- Dual lb/kg dial scale with hanging hook
- Item #34704104

CAPACITY

UPC	PACK QTY.	U of M
0 77784 00687 0	4	1 ea.

SCALE COMPARISON GUIDE

GOOD

BETTER



1020NFS



TE10FT



TE2FT



TE22OS




1020PRNFS



TE32FT



TE11FT



TE33OS



TE22FT



TE66OS



Product Specifications	1020NFS 1020PRNFS	TE10FT TE32FT	TE2FT - TE11FT TE22FT	TE22OS - TE33OS TE66OS	TE10R
Capacity:	Dry: 11 lb x 0.1 oz / 5 kg x 1 g Liquid: 175 fl. oz x 0.1 fl. oz / 5000 ml x 1 ml	TE10FT: 11 lb x 0.1 oz / 5 kg x 1 g TE32FT: 2 lb x 0.01 oz / 1 kg x 0.5 g	TE2FT: 2 lb x 0.1 oz / 1 kg x 1 g TE11FT: 11 lb x 0.1 oz / 5 kg x 1 g TE22FT: 22 lb x 0.1 oz / 10 kg x 1 g	TE22OS: 22 lb x 0.1 oz / 10 kg x 1 g TE33OS: 33 lb x 0.1 oz / 15 kg x 1 g TE66OS: 66 lb x 0.1 oz / 30 kg x 2 g	10 lb x 0.1 oz / ¼ oz, ¼ oz / 2 g, 5 g
Certifications:	NSF	NSF	NSF	NSF	NSF
Stainless Steel Platform Size:	6" (removable)	5.38"x5.38" (removable)	7.15"x7.15" (removable)	11.25"x7.25" (removable)	5"x8" (removable)
Scale Dimensions:	6.5"x8"x1.25"	7.4"x10.5"x2.5"	8.5"x12.0"x2.5"	12.5"x12.5"x2.5"	8.25"x10.0"x2.75"
Features:	<ul style="list-style-type: none"> • Measures Dry & Liquid • Tare • Hold • Auto-Off • Disable Auto-Off • Low Battery Indicator • Over/Under • Waterproof Rating • Field Recalibratable • A/C Adapter Included 	✓ ✓ ✓	✓ ✓	✓ ✓	✓ ✓
Housing Material:	ABS	ABS	ABS	ABS	ABS
Battery Type:	2 AA (included)	2 AAA	2 AAA	2 AAA	Rechargeable (included)
Warranty:	1 Year Limited	1 Year Limited	1 Year Limited	1 Year Limited	1 Year Limited

BEST



TE10T	TE10CSW	TE10SSW TE20SSW	TE30WD	TE50
Dry: 10 lb x 0.002 lb/160 oz x 0.05 oz / 5000 g x 0.001 kg Liquid: 169 fl. oz x 0.05 fl. oz / 5000 ml x 1 ml	Dry: 10 lb x 0.002 lb / 10 lb x 0.005 oz / 160 oz x 0.05 oz / 5000 g x 1 g Liquid: 160 fl. oz x 0.05 fl. oz / 5000 ml x 1 ml	TE10SSW: 10 lb x 0.005 lb / 10 lb x 0.1 oz / 10 lb x 1/8 oz 160 oz x 0.005 oz / 160 oz x 1/8 oz / 5000 g x 1 g TE20SSW: 20 lb x 0.005 lb / 20 lb x 0.05 oz / 20 lb x 1/8 oz 320 oz x 0.05 oz / 320 oz x 1/8 oz / 9000 g x 1 g	0-10 lb x 0.05 oz / 0-5 kg x 0.002 kg (2g) 10-30 lb x 0.1 oz / 5-15 kg x 0.005 kg (5 g)	50 lb x 0.5 oz / 22 kg x 0.01 kg
NSF	NSF	NSF	NSF	NSF
7.0"x6.5" (removable)	4.75"x5.9"	6.7"x7.0"	14"x14" (removable)	13.5"x11.5" (removable)
7"x7.75"x9.5"	9.61"x7.40"x2.24"	6.0"x6.75"x1.875"	15.25"x15.10"x3.00"	17.25"x14.50"x2.75"
✓ ✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓	✓ (touchless tare) ✓ ✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓ ✓ ✓
	IP 65	IP 67		(1 for base and 1 for remote)
✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓
ABS	ABS	Stainless Steel	Stainless Steel	ABS
4 AA	9 Volt	Rechargeable (included)	Base: 6 AA Remote: 4 AA	4 AA
1 Year Limited	1 Year Limited	1 Year Limited	1 Year Limited	1 Year Limited



KITCHEN TOOLS & GADGETS

Fruit & Veg Prep



COLOR
CHERRY

**102-138-005 STEM GEM®
STRAWBERRY HULLER**

- Push green button, insert, twist and remove stem
- Stainless steel construction

UPC	PACK QTY.	U of M
8 38485 01235 1	6	1 ea.



COLOR
CHERRY

**102-241-005 QUICKPIT®
CHERRY PITTER**

- Removes pits from cherries and olives

UPC	PACK QTY.	U of M
8 38485 01563 5	6	1 ea.



COLOR
CHERRY

**102-205-017 BANANZA®
BANANA SLICER**

- Perfectly slices bananas in seconds
- Stainless steel blades

UPC	PACK QTY.	U of M
8 38485 01557 4	6	1 ea.



COLOR
WASABI

**102-734-062 LOOSELEAF™
KALE & GREENS STRIPPER**

- Strip leaves from stems in seconds
- Works on everything from kale to thyme

UPC	PACK QTY.	U of M
8 38485 02367 8	6	1 ea.



COLOR
ROMA

**102-575-205 HULLSTER™
TOMATO CORER**

- Core tomatoes quickly and easily
- Release button and twist to remove core

UPC	PACK QTY.	U of M
8 38485 02128 5	6	1 ea.



Fruit & Veg Prep (cont.)


102-159-017 FRESHFORCE™ CITRUS JUICER

- Dual gear mechanism
- Strains all pulp and seeds
- Produces up to 20% more juice than conventional citrus juicers
- Constructed of durable strength GF Nylon

UPC	PACK QTY.	U of M
8 38485 01329 7	6	1 ea.


102-415-011 FRESHFORCE™ LIME JUICER

- Dual gear mechanism
- Strains all pulp and seeds
- Produces up to 20% more juice than conventional citrus juicers
- Constructed of durable strength GF Nylon

UPC	PACK QTY.	U of M
8 38485 01761 5	6	1 ea.


102-408-008 FRESHFORCE™ ORANGE JUICER

- Dual gear mechanism
- Strains all pulp and seeds
- Produces up to 20% more juice than conventional citrus juicers
- Constructed of durable strength GF Nylon

UPC	PACK QTY.	U of M
8 38485 01745 5	4	1 ea.


102-157-001 FRESHFORCE™ POTATO RICER

- Makes perfect mashed potatoes
- Dual gear mechanism
- Removable stainless steel basket
- Constructed of durable strength GF Nylon

UPC	PACK QTY.	U of M
8 38485 01340 2	4	1 ea.


102-238-001 FRESHFORCE™ GARLIC PRESS

- Dual-gear mechanism
- Swing-out stainless steel plate for easy cleaning
- Constructed of durable strength GF Nylon

UPC	PACK QTY.	U of M
8 38485 01558 1	6	1 ea.





KITCHEN TOOLS & GADGETS

Switchit® Spatulas



COLOR ARUGULA COLOR CHERRY

- Perfect for small jars
- Heat and stain resistant silicone
- 2-in-1 design
- Heat resistant up to 400°F

UPC	PACK QTY.	U of M
8 38485 02259 6	6	1 ea.

UPC	PACK QTY.	U of M
8 38485 02260 2	6	1 ea.



COLOR ARUGULA COLOR CHERRY COLOR MERINGUE

- Perfect for spreading or icing/decorating
- Heat and stain resistant silicone
- 2-in-1 design
- Heat resistant up to 400°F

UPC	PACK QTY.	U of M
8 38485 02259 6	6	1 ea.

UPC	PACK QTY.	U of M
8 38485 02260 2	6	1 ea.

UPC	PACK QTY.	U of M
8 38485 02176 6	6	1 ea.



Switchit® Spatulas (cont.)



- Versatile spatula for multiple uses
- Heat and stain resistant silicone
- 2-in-1 design
- Heat resistant up to 400°F

		UPC	PACK QTY.	U of M
103-656-011	Switchit® All-Purpose Spatula - Arugula	8 38485 02237 4	6	1 ea.
103-656-005	Switchit® All-Purpose Spatula - Cherry	8 38485 02238 1	6	1 ea.
103-656-009	Switchit® All-Purpose Spatula - Meringue ★	8 38485 02175 9	6	1 ea.
103-656-171	Switchit® All-Purpose Spatula - Blackberry	8 38485 02282 4	6	1 ea.
103-656-006	Switchit® All-Purpose Spatula - Blueberry	8 38485 02283 1	6	1 ea.



- Curved head allows for scraping in large bowls
- Heat and stain resistant silicone
- 2-in-1 design
- Heat resistant up to 400°F

		UPC	PACK QTY.	U of M
103-674-011	Switchit® Mixer Scraper - Arugula	8 38485 02263 3	6	1 ea.
103-674-005	Switchit® Mixer Scraper - Cherry	8 38485 02264 0	6	1 ea.



WINE & BAR ACCESSORIES

Manual Corkscrews



 COLOR
BLACK STAINLESS
STEEL

W5614 2-Step Waiters' Corkscrew

- 2-step operation removes all corks
- Built-in foil cutter

UPC	PACK QTY.	U of M
0 22578 10107 1	12	1 ea.



 COLOR
WALNUT STAINLESS
STEEL

W5624 Walnut Zippity Two-Step

- Non-stick spiral easily turns into cork
- Built-in foil cutter

UPC	PACK QTY.	U of M
0 22578 10582 6	12	1 ea.



 COLOR
BLACK STAINLESS
STEEL

W6111 Ah, So! Cork Remover

- Two-prong cork lifter
- Includes faux leather case for storage

UPC	PACK QTY.	U of M
0 22578 10272 6	6	1 ea.



 COLOR
BLACK

W6004 Original Rabbit

- Pulls & ejects cork in seconds
- Foil cutter and extra spiral included

UPC	PACK QTY.	U of M
0 22578 06004 0	4	1 ea.



 COLOR
VELVET BLACK

W6907 Vertical Rabbit

- Stands up vertically for quicker, easier cork pulls
- Automatically releases cork

UPC	PACK QTY.	U of M
0 22578 06907 4	4	1 ea.

 COLOR
BLACK

W4030FS POCKET CORKSCREW

- Compact and lightweight
- Two piece construction with safety case easily converts into corkscrew handle
- The 5 turn work allows for smooth cork removal

UPC	PACK QTY.	U of M
0 22578 10799 8	12	1 ea.

 COLOR
SILVER STAINLESS
STEEL

W4045FS PREMIUM WING CORKSCREW

- Clamps stable on the top of a wine bottle which makes it easy to insert spiral into the cork
- Double wing design with ergonomic handles and comfort grip pads makes cork removal quick
- Multifunctional integrated bottle opener
- Heavy duty, durable metal construction with a chrome polished finish

UPC	PACK QTY.	U of M
0 22578 10816 2	6	1 ea.



Preservers



 COLOR MULTI

W6119 WINE BOTTLE STOPPERS | 2 PACK

- 12 pieces - In sets of 2
- Multi-colored wine stoppers

UPC	PACK QTY.	U of M
0 22578 06119 1	12	1 ea.



 COLOR BLACK

W6128 STAINLESS STEEL WINE POURERS/STOPPERS

- Set of 2 - Stainless accents
- Flip to open & pour wine - Flip to close and seal wine bottle

UPC	PACK QTY.	U of M
0 22578 10585 7	6	1 ea.



 COLOR BLACK

W9955 MOJITO MUDDLER

- Releases essence of mint leaves
- Polished, corrosion-free stainless steel

UPC	PACK QTY.	U of M
0 22578 10102 6	6	1 ea.



 COLOR VELVET BLACK

W6115 WINE/CHAMPAGNE SEALER

- 12 pieces - Easy grip velvet finish
- Seals wine air-tight

UPC	PACK QTY.	U of M
0 22578 10584 0	12	1 ea.





W6127 SUPER AERATOR

- Stainless accents
- Aerates red wine to improve flavor and bouquet

UPC	PACK QTY.	U of M
0 22578 10584 0	8	1 ea.



 COLOR BLACK

W6124FS WINE BOTTLE STOPPERS

- In sets of 4 - fits all bottle sizes
- Seals wine air-tight
- Reuseable

UPC	PACK QTY.	U of M
0 22578 10791 2	4	1 ea.



 COLOR VELVET BLACK

W6113 FOIL CUTTER

- 12 pieces - Easy grip velvet finish
- Removes foil quickly and neatly

UPC	PACK QTY.	U of M
0 22578 06113 9	12	1 ea.





916WHSVLRK

Professional Large Dial Scale

- Capacity: 400 lb/180 kg
- Extra large dial for easy reading
- Easy to clean, durable vinyl platform
- Large, stable platform



7029W Digital Scale

- Capacity: 330 lb/150 kg
- Easy to read 3" display
- Slim 1.5" profile
- Textured finish platform with silver accents
- Item #702940133

UPC	PACK QTY.	U of M
0 77784 02165 1	2	1 ea.



Foot icon INSTANT READ
 LR1130 icon BATTERY INCLUDED
 5 icon 5 YEAR LTD WARRANTY

UPC	PACK QTY.	U of M
0 77784 01560 5	3	1 ea.



7370 Digital Scale

- Capacity: 440 lb/200 kg
- Large 3.6" x 2" display
- Accu-Glo™ blue backlight
- Antimicrobial platform inhibits the growth of bacterial odor and mold
- Item #73704102

UPC	PACK QTY.	U of M
0 77784 02218 4	2	1 ea.

Foot icon INSTANT READ
 AAA icon BATTERY INCLUDED
 5 icon 5 YEAR LTD WARRANTY

UPC	PACK QTY.	U of M
0 77784 01295 6	2	1 ea.

7403 Digital Scale

- Capacity: 440 lb/200 kg
- Large 3" display
- Accu-Glo™ blue backlight
- Brushed stainless steel platform
- Item #74034102





7506 Digital Glass Scale

- Capacity: 400 lb/180 kg
- Easy to read 1.2" digits
- High-tempered glass platform
- Chrome accents
- Item #75064192

UPC PACK QTY. U of M

2 1 ea.

0 82197 10407 5



7562 Digital Glass Scale

- Capacity: 400 lb/180 kg
- LCD readout with reversed red digits
- Black tempered glass platform with brushed stainless steel accents
- Item #75624072

UPC PACK QTY. U of M

2 1 ea.

0 77784 01226 0



7528W Digital Glass Scale ★

- Capacity: 440 lb/200 kg
- Bright white finish with mirror oil paint accent
- Extra large 12.25" x 13.5" tempered glass platform
- 3.2" x 2" readout with blue backlight
- Item #75284012

UPC PACK QTY. U of M

2 1 ea.

0 77784 02528 4



9857 Digital Scale

- Capacity: 330 lb/150 kg
- SuperBrite™ red LED display
- Ribbed textured mat with non slip platform
- Item #98574072

UPC PACK QTY. U of M

2 1 ea.

0 77784 01088 4



REPLACEMENT PARTS & ACCESSORIES

Accessories

51P432J1 Pan Clip for 1 $\frac{3}{4}$ " and 2" BiTherm®

Replacement Parts for Model #9405/9400

9400BG	Replacement battery gasket for 9405
9405BC	Replacement battery cover for 9405-9400
9405RH	Replacement handle for 9405
9405RP	Replacement probe for 9405

Miscellaneous Parts and Supplies

97S35J	Wick for 5522, 5523 hygrometers
TEADPT1	120V adapter for models: TE150, TE400, TE21P
TEADPT2	220V adapter for models: TE150, TE400, TE21P
TEADPT3	120V adapter for model: TE10R
TEADPT5	120V adapter for models: TE10C, TE10CSW, TE32C
TEADPT7	220V adapter for model: TE10R
TEADPT10	120V adapter for model: TE10T
TEADPT11FT	120V adapter for TE10SSW
TEADPT12	120V adapter for TE10FT, TE11FT, TE22FT, TE220S, TE32FT
TEADPT13FT	220V adapter for models: TE10FT, TE11FT, TE22FT, TE32FT
TERBAT	Replacement battery for TE10R

Terms & Conditions

1. Pricing - Please contact your sales representative for pricing.
2. Minimum Order - Product orders under \$200 net will be charged a \$30 processing fee per order.
3. Freight - All product is shipped FOB Memphis, TN. Routing at factory discretion.
4. Terms - Net 30 days. Interest of 1 1/2% per month will be assessed on outstanding balances past agreed account terms.
5. Standard Packaging - Product must be ordered in minimum quantities of shelf packs only.
6. Lead Time - Taylor requires a minimum of 10 working days to ship orders from the day the order is received via phone, mail, fax or EDI at Customer Service.
7. Back Orders - Back orders will be shipped as soon as possible after prior authorization from customer.
8. Returns - A "Returned Goods Authorization" (RGA) must be obtained from Taylor before a return for any reason will be accepted. Shipments without an RGA will be refused. Contact Customer Service for an RGA.
9. EDI - Taylor is fully prepared to receive your orders via EDI. For information about Taylor's EDI capabilities, please contact Customer Service.
10. Claims - Taylor is not responsible for damage, loss or pilferage in transit. Goods are carefully packed to prevent damage. If damage or loss is found on receipt of goods, notify carrier AT ONCE to request an inspection. Customer bears the responsibility for filing carrier claims.

Due to continuous product improvements, pictures in catalog may differ slightly from the actual product.



Model	Description	Page	Model	Description	Page
Thermometers					
166	PatioClock	24	5948N	Tobacco Thermometer.....	22
681	Extra Large Thermometer	24	5976N	Soil Thermometer.....	22
1105J	Dry Storage Thermometer.....	26	5977N	Refrigerator/Freezer Thermometer	17
1106J	Cold/Dry Storage Thermometer	26	5978N	Candy/Deep Fry Thermometer	14
1441E	Digital Max/Min Thermometer.....	28	5980N	Professional Hot Holding Thermometer.....	15
1442	Critical Care Thermometer	16, 28	5981N	Professional Cold Holding Thermometer.....	18
1443	Digital Refrigerator/Freezer Thermometer	16	5982N	Milk/Beverage Thermometer.....	18
1446	Wireless Refrigeration Thermometer	16, 28	5983N	Candy/Deep Fry Thermometer	14
1470FS	Digital Thermometer and Timer	13	5984J	Instant Read Oven Thermometer	15
1470FSRP	Replacement Probe for Model 1470FS	13	5985N	Hot Beverage Thermometer	15
1476FDA	Compact Folding Thermometer	9, 30	5988N	1" Standard Grade Instant Read Thermometer	22
1750	Atomic Clock/Termometer	24	5989-44	1" Standard Grade Instant Read Thermometer	4
21412-1J	Pocket Thermometer in Plastic Case	29	5994	Refrigeration Thermometer	18
21420-1J	Pocket Thermometer in Plastic Case	29	5989N	1" Standard Grade Instant Read Thermometer	4
21424-1J	Pocket Thermometer in Plastic Case	29	5997E	Cappuccino Frothing Thermoemter	22
21432-1J	Pocket Thermometer in Plastic Case	29	6021	Surface Temperature Thermometer	15
21462-1J	Dishwasher Test Thermometer	23	6065N	1" Superior Grade Instant Read Thermometer	4
3503	Refrigerator/Freezer Thermometer	16, 19	6071	1" Superior Grade Instant Read Thermometer	5
3504	Meat Dial Thermometer	12, 19	6072N	1" Superior Grade Instant Read Thermometer	5
3505	Candy/Deep Fry Thermometer	13, 19	6073J	1" Superior Grade Instant Read Thermometer	5
3506	Oven Dial Thermometer	19	6075	1" Superior Grade Instant Read Thermometer	5
3507	Refrigerator/Freezer Thermometer	16, 19	6076J	1" Superior Grade Instant Read Thermometer	5
3509	Refrigerator/Freezer Thermometer	16	6079J	1" Superior Grade Instant Read Thermometer	5
3512	Instant Read Thermometer	19	6084J12	Professional Candy/ Deep Fry Thermometer	14
3516	Digital Instant Read Thermometer	9, 30	6084J8	Professional Candy/ Deep Fry Thermometer	14
3517	Instant Read Thermometer	20	6091N	1" Standard Grade Instant Read Thermometer	4
3518N	Digital Cooking Thermometer	20	6092N	1" Standard Grade Instant Read Thermometer	4
3519FDA	Waterproof Digital Instant Read Thermometer with Stepdown Probe.....	9, 20, 31	6092NBLBC	1" Dial Instant Read Reduce Cross Contamination Thermometer Color Coded: Blue - Fish	21
3519PRFDA	Waterproof Digital Instant Read Thermometer with Stepdown Probe.....	10, 31	6092NBRBC	1" Dial Instant Read Reduce Cross Contamination Thermometer Color Coded: Brown - Cooked Meat	21
3522	Deep Fry Thermometer	13, 20	6092N-FSA	1" Dial Instant Read Reduce Cross Contamination Thermometer 5-Pack	21
3621N	1" Standard Grade Instant Read Thermometer	4	6092NPRBC	1" Dial Instant Read Reduce Cross Contamination Thermometer Color Coded: Purple - Allergy	21
497J	Humidiguide Dial Thermometer	24	6092NRDBC	1" Dial Instant Read Reduce Cross Contamination Thermometer Color Coded: Red - Raw Meat	21
5109	Jumbo Wall Thermometer	26	6092NYLBC	1" Dial Instant Read Reduce Cross Contamination Thermometer Color Coded: Yellow - Poultry	21
5132N	Utility Wall Thermometer	26	6093N	1" Standard Grade Instant Read Thermometer	4
5135N	Wall Thermometer	26	6094N	1" Standard Grade Instant Read Thermometer	4
5153	Window Thermometer	26	6096N	1" Standard Grade Instant Read Thermometer	4
5154	Wall Thermometer	26	6099N	1" Standard Grade Instant Read Thermometer	4
5316N	Window Thermometer	26	61054J	Meat Thermometer	12
5321N	3 1/2" Dial Stick-On Window Thermometer	26	6211J	2" Superior Grade BiTherm® Thermometer	6
5327	Indoor/Outdoor Thermometer	27	6212J	2" Superior Grade BiTherm® Thermometer	6
5329	Indoor/Outdoor Thermometer	27	6215J	2" Superior Grade BiTherm® Thermometer	6
5380N	1 3/4" Dial Stick-On Window Thermometer	27	6220J	2" Superior Grade BiTherm® Thermometer	6
5416J	Thermometer	22	6235J	2" Superior Grade BiTherm® Thermometer	6
5458	Max/Min Thermometer	28	6246J	CharBroiler Thermometer	15
5459	Max/Min Thermometer	28	6714	Indoor/Outdoor 13.25" Dial Thermometer	24
5460	Max/Min Thermometer	28	8018N	1 3/4" Standard Grade Instant Read Thermometer	5
5504	Indoor Humidiguide and Thermometer	27	814GW	Smoker Thermometer	15
5566	Digital Hygrometer with Thermometer	27	8212J	1 3/4" Superior Grade BiTherm® thermometer	6
5630	6" black and white bi-metal thermometer	25	8215N	1 3/4" Superior Grade BiTherm® thermometer	6
5636	6" Bi-Metal Thermometer-HACCP Cooler/Freezer	25	8215N	1 3/4" Dial Hot Beverage Thermometer	22
5637	6" Bi-Metal Thermometer-HACCP Prep/Dry storage	25	8220J	1 3/4" Superior Grade BiTherm® thermometer	6
5680	13.25" Thermometer-HACCP Cooler/Freezer	25	8238J	1 3/4" Superior Grade BiTherm® thermometer	6
5681	13.25" Thermometer-HACCP Prep/Dry storage	25	8750	TempRite® Temperature Test Labels	22
5911N	Candy/Deep Fry Thermometer	13	8751	TempRite® Temperature Test Labels	22
5921N	Oven Guide Thermometer	15	8752	TempRite® Temperature Test Labels	22
5924	Refrigerator/Freezer Thermometer	17	8766J	TempRite® Temperature Test Strips	23
5925-44	Refrigerator/Freezer Thermometer International Series	17	8767J	TempRite® Temperature Test Strips	23
5925N	Refrigerator/Freezer Thermometer	17	8769	TempRite® Temperature 3 in 1 Test Labels	23
5926	Economy Hanging Refrigerator/Freezer Thermometer	17	9305	Dual Temp Infrared & Thermocouple Thermometer	8
5927	Glycol Refrigerator/Freezer Thermometer	17	9306N	Splash-Proof Dual Temp Infrared Thermometer with Fold Out Thermocouple Step Down Probe	7
5932	Oven Dial Thermometer	15	9405	High Accuracy Waterproof K-Type Thermocouple Thermometer	7
5933	Floating Thermometer	13			
5937N	Multi-Purpose Thermometer	12			
5939N	Meat Thermometer	12			
5947	Oven/Meat Dial Thermometer	12			

INDEX

Model	Description	Page	Model	Description	Page
9405RP	Replacement Probe for Model 9405.....	8	TE2FT	Compact Digital Portion Control Scale	35, 42
9523	Infrared Thermometer.....	8	TE30WD	Digital Portion Control Scale with Wireless Display	38, 43
9526	Mini Infrared Thermometer.....	8	TE32FT	Compact Digital Portion Control Scale	36, 42
9527	Infrared Thermometer.....	9	TE33OS	Digital Portion Control Scale with Oversized Platform	36, 42
9532	K-Type Thermocouple Plus Infrared Thermometer.....	7	TE400	Receiving Scale with Steel Tread Plate Platform	40
9806	Clip-On Probe	8	TE50	Digital Portion Control Scale with Handle.....	38, 43
9810-2	Hamburger/Filet Probe.....	8	TE66OS	Digital Portion Control Scale with Oversized Platform	37, 42
9812	Angle Surface Probe	8	THD32	Heavy Duty Mechanical Scale	40
9815A	Thermocouple Data Logger	7	THD32D	Heavy Duty Mechanical Scale with Dashpot	40
9817	Step-Down Penetration Probe with 3' Lead	8	THD50	Heavy Duty Mechanical Scale	40
9818	Step-Down Penetration Probe with 3' Lead	8	TP16	Compact analog portion control Scale	38
9821-PBN	Thermocouple Thermometer with Step Down K-Type Probe.....	7	TP16FF	French Fry / Taco Holder Scale.....	38
9836	Adjustable Head Digital Thermometer	10	TP32	Ice Cream Scale	38
9839-15	Adjustable Head Digital Candy/Deep Fry Thermometer	14	TR250	Heavy Duty Mechanical Receiving Scale	41
9840PRN	Digital Thermometer	10, 30	TS25KL	Analog Portion Control Scale with Rotating Dial	39
9840RB	Digital Thermometer	10, 30	TS32	Analog Portion Control Scale with Rotating Dial	39
9841RB	High Temp Digital Thermometer	10, 30	TS32D	Analog Portion Control Scale with Dashpot	39
9842FDA	Waterproof Digital Thermometer	10, 31	TS32F	Analog Portion Control Scale with Fixed Dial	39
9848EFDA	Waterproof Digital Thermometer	11, 31	TS55	Analog Portion Control Scale with Rotating Dial	39
9867FDA	Digital Folding Probe Thermometer	7, 11	TS50	Analog Portion Control Scale with Rotating Dial	39
9877FDA	Compact Waterproof Digital Thermometer	11, 31			
9878E	High Precision Digital Thermometer	11, 31			
9878EPR	Allergen Waterproof Digital Pocket Thermometer	11, 31			
9940N	Panel Mount Digital Thermometer	18			
9999N	HACCP Probe Wipes	21			
9999T	HACCP Probe Wipes	21			
Timers					
5806	Digital Multi-Purpose Timer	32			
5816N	Chef's Timer & Stopwatch	33			
5827-21	Digital Timer	34			
5822	Memory Digital Timer	32			
5828	Dual Event Digital Timer/Clock	32			
5829	10-Key Timer	33			
5830	Stainless Steel 60 Minute Timer	32			
5831N	60 Minute Timer	32			
5832	60 Minute Timer	32			
5839N	4 Event Digital Timer	33			
5847-21	Digital Timer	34			
5849	4 Event Timer with Whiteboard	34			
5862	Compact 4 Event Digital Timer	33			
5863	Water & Impact Resistant Timer	33			
5873	Super Loud (95 db) Timer	34			
5896	Jumbo Readout Digital Timer	33			
Scales					
1020NFS	Digital Kitchen Scale	35, 42	W4030FS	Pocket Corkscrew.....	48
1020PRNFS	Digital Kitchen Scale	35, 42	W4045FS	Premium Wing Corkscrew	48
1250BK	Compact Digital Kitchen Scale	35	W5614	2-Step Waiter's Corkscrew-Stainless Steel/Black	48
3070	Industrial Hanging Scale	41	W5624	Walnut Zippity Two-Step	48
3305	Industrial Hanging Scale Scoop	41	W6004	Original Rabbit-Black	48
3328	Industrial Hanging Scale	41	W6111	Ah, So! Cork Remover	48
3470	Industrial Hanging Scale	41	W6113	Foil Cutter	49
3817	Compact Digital Kitchen Scale	35	W6115	Wine/Champagne Sealer	49
3817R	Compact Digital Kitchen Scale	35	W6119	Stopper/Pourers-Colors	49
TE10CSW	Waterproof Digital Portion Control Scale	37, 43	W6124FS	Wine Bottle Stoppers in Black, Set of 4	49
TE10FT	Compact Digital Portion Control Scale	36, 42	W6127	Super Aerator	49
TE10R	Digital Portion Control Scale	37, 42	W6128	Stainless Steel Wine Pourers/Stoppers	49
TE10SSW	Waterproof Digital Portion Control Scale	37, 43	W6907	Vertical Rabbit	48
TE10T	10 lb Digital Portion Control Scale with Tower Teadout	37, 43	W9955	Mojito Muddler	49
TE11FT	Digital Portion Control Scale	36, 42			
TE150	Receiving Scale with Stainless Steel Platform	40			
TE20SSW	Waterproof Digital Portion Control Scale	38, 43			
TE21P	21 oz Precision Measurement Digital Scale	37			
TE22FT	Digital Portion Control Scale	36, 42			
TE22OS	Digital Portion Control Scale with Oversized Platform	36, 42			
TE250	Receiving Scale with Stainless Steel Platform	40			
Chef'n Kitchen Tools & Gadgets					
102-138-005	Stem Gem® strawberry huller	44			
102-157-001	Freshforce™ Potato Ricer	45			
102-159-017	Freshforce™ Citrus Juicer	45			
102-205-017	Bananza® Banana Slicer	44			
102-238-001	Freshforce™ Garlic Press	45			
102-241-005	Quickpit® Cherry Pitter	44			
102-408-008	Freshforce™ Orange Juicer	45			
102-415-011	Freshforce™ Lime Juicer	45			
102-575-205	Hullster™ Tomato Corer	44			
102-734-062	Looseleaf™ Kale & Greens Stripper	44			
103-656-005	Switchit® All-Purpose Spatula-Cherry	47			
103-656-006	Switchit® All-Purpose Spatula-Blueberry	47			
103-656-009	Switchit® All-Purpose Spatula-Meringue	47			
103-656-011	Switchit® All-Purpose Spatula-Arugula	47			
103-656-171	Switchit® All-Purpose Spatula-Blackberry	47			
103-671-005	Switchit® Mini All-Purpose Spatula-Cherry	46			
103-671-009	Switchit® Mini All-Purpose Spatula-Meringue	46			
103-671-011	Switchit® Mini All-Purpose Spatula-Arugula	46			
103-672-005	Switchit® 2-in1 Mini Spoon-Cherry	46			
103-672-011	Switchit® 2-in1 Mini Spoon-Arugula	46			
103-674-005	Switchit® Mixer Scraper-Cherry	47			
103-674-011	Switchit® Mixer Scraper-Arugula	47			
Wine & Bar Accessories					
W4030FS	Pocket Corkscrew.....	48			
W4045FS	Premium Wing Corkscrew	48			
W5614	2-Step Waiter's Corkscrew-Stainless Steel/Black	48			
W5624	Walnut Zippity Two-Step	48			
W6004	Original Rabbit-Black	48			
W6111	Ah, So! Cork Remover	48			
W6113	Foil Cutter	49			
W6115	Wine/Champagne Sealer	49			
W6119	Stopper/Pourers-Colors	49			
W6124FS	Wine Bottle Stoppers in Black, Set of 4	49			
W6127	Super Aerator	49			
W6128	Stainless Steel Wine Pourers/Stoppers	49			
W6907	Vertical Rabbit	48			
W9955	Mojito Muddler	49			
Hotel & Resort Scales					
7029W	Digital Scale	50			
7370	Digital Scale	50			
7403	Digital Scale	50			
7506	Digital Glass Scale	51			
7528W	Digital Glass Scale	51			

Model	Description	Page
7562	Digital Glass Scale	51
9857	Digital Scale	51
916WHSVLKR	Professional Large Dial Scale.....	50

Replacement Parts & Accessories

51P432J1	Pan Clip for 1 3/4" and 2" BiTherm®	52
9400BG	Replacement Battery Gasket for 9405.....	52
9405BC	Replacement Battery Cover for 9405-9400	52
9405RH	Replacement Handle for 9405	52
9405RP	Replacement Probe for 9405.....	52
97S35J	Wick for 5522, 5523 Hygrometers.....	52
TEADPT1	120V Adapter for Models: TE150, TE400, TE21P.....	52
TEADPT2	220V Adapter for Models: TE150, TE400, TE21P	52
TEADPT3	120V Adapter for Model: TE10R.....	52
TEADPT5	120V Adapter for Models: TE10C, TE10CSW, TE32C.....	52
TEADPT7	220V Adapter for Model: TE10R	52
TEADPT10	120V Adapter for Model: TE10T	52
TEADPT11FT	120V Adapter for TE10SSW.....	52
TEADPT12	120V Adapter for TE10FT, TE11FT, TE22FT, TE22OS, TE32FT	52
TEADPT13FT	220V Adapter for Models: TE10FT, TE11FT, TE22FT, TE32FT	52
TERBAT	Replacement Battery for TE10R	52



All orders and customer service
inquiries please contact:

Taylor Precision Products, Inc.
Customer Service & Distribution
Phone: 575-526-0944
Toll Free: 800-289-0944
Fax: 575-526-4347
Seattle, WA 98134
www.taylorusa.com



© 2017 Taylor Precision Products, Inc. and its affiliated companies, all rights reserved. Taylor® is a registered trademark and Cal-Max™ and Accu-Glo™ are trademarks of Taylor Precision Products, Inc. and its affiliated companies. All rights reserved.

TOOLS THE PROS TRUST