FISSURED PANELS



USG Radar™ Basic R2110

Rendering
© USG Corporation 2025.
All rights reserved.


TO ORDER SAMPLES, GO TO USG.COM

AVAILABLE COLORS*


Flat Black
205

*Available on Radar R2210 & R2410

USG Fifth Avenue™

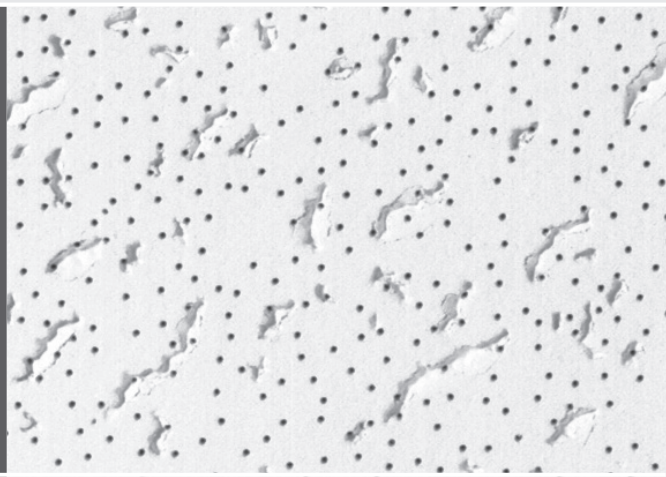

USG Radar™ & USG Radar™ Basic

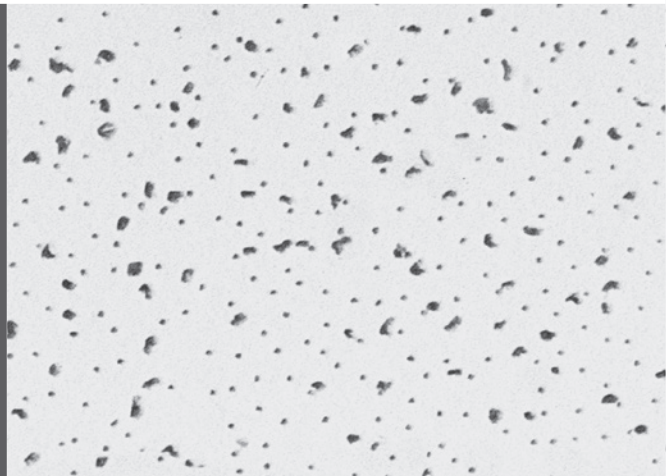

FEATURES AND BENEFITS

- Match many existing panels.
- Good sound control for a variety of commercial environments.
- USG Fifth Avenue™ panels feature a directional pattern.
- USG Radar™ panels are nondirectional for even easier installation.

SUBSTRATE

- Wet-formed mineral fiber

PRODUCT SPECIFICATIONS

Product Certified for Low Chemical Emissions:
- UL.COM/GG
- UL 2818

30 Year LIMITED System Warranty:
- No Visible Sag
- Mold/Mildew Protection

BA Balanced Acoustics

HRC High Recycled Content

USDA CERTIFIED BIOBASED PRODUCT

ECOBLUEPRINT

Declare®

Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

Pattern	Item No.	Edge	Panel Size	Pcs./ Carton	Sq. Ft./ Carton	Ctns./ Pallet	Fire Class	Sound Control NRC	Sound Control CAC	LR	Grid Options	VOC	Mold, Mildew & Sag Resistance	USG Commercial Equivalent
USG FIFTH AVENUE™	133	SQ	2′x2′x5/8″	16	64	20	Class A	0.55	33	0.81	A, B	Low	–	USG Fissured™ Basic 560
	220	SQ	2′x4′x5/8″	8	64	18		0.55	35	0.81	A	Low	–	USG Fissured™ Basic 586
	270	SLT	2′x2′x5/8″	16	64	20	Class A	0.55	33	0.81	A	Low	–	USG Fissured™ Basic 506
	280	SQ	2′x4′x5/8″	8	64	20	Class A	0.55	35	0.81	A	Low	–	USG Fissured™ Basic 562
	671	SQ	2′x2′x5/8″	16	64	16		0.55	35	0.81	A, C	Low	–	USG Fissured™ Basic 585
USG RADAR™ BASIC	R2110	SQ	2′x2′x5/8″	16	64	20	Class A	0.55	33	0.83	A, B	Low	–	USG Radar™ Basic 2110
	R2120	SLT	2′x2′x5/8″	16	64	20	Class A	0.55	33	0.83	A	Low	–	USG Radar™ Basic 2120
	2130	FLB	2′x2′x5/8″	16	64	16	Class A	0.55	33	0.83	B	Low	–	USG Radar™ Basic 2130
	R2310	SQ	2′x4′x5/8″	8	64	20	Class A	0.55	35	0.83	A	Low	–	USG Radar™ Basic 2310
USG RADAR™	R2210[1]	SQ	2′x2′x5/8″	16	64	20	Class A	0.55	33	0.84	A, B	Low	✓	USG Radar™ 2210
	R2220	SLT	2′x2′x5/8″	16	64	20	Class A	0.55	33	0.84	A	Low	✓	USG Radar™ 2220
	R2225	SLT	2′x2′x5/8″	16	64	16		0.55	35	0.84	A	Low	✓	USG Radar™ 2225
	2230	FLB	2′x2′x5/8″	16	64	20	Class A	0.55	33	0.84	B	Low	✓	USG Radar™ 2230
	R2410[1]	SQ	2′x4′x5/8″	8	64	20	Class A	0.55	35	0.84	A	Low	✓	USG Radar™ 2410
	R2415	SQ	2′x4′x5/8″	8	64	18		0.55	35	0.84	A	Low	✓	USG Radar™ 2415
	R2570[2]	SF	12″x12″x5/8″	48	48	18	Class A	0.45	35	0.84	Adhesive Staple	Low	✓	USG Radar™ 2570

Low Emissions (VOC)
Certified for low emitting performance, meets CDPH 01350 v1.2 - 2017. Certificates of Compliance for Low VOC Emissions are available on usg.com and at usg.ecomedes.com.


ClimaPlus™ Warranty Performance
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
USG classifies High Recycled Content as greater than 50%. Methodology of calculation based on FTC guidelines.


Firecode®

GRID PROFILE OPTIONS


A
USG SDX®/SDXL™



B
USG Centricitee™ DXT™



C
USG Centricitee™ DXLT™



PHYSICAL DATA

ASTM E84 surface-burning characteristics
Class A
Flame Spread: 25 or less
Smoke Developed: 50 or less

Recycled content
25%-65%

Thermal resistance
R-1.4 (Class A)
R-1.6 (Firecode™)

Maintenance
Can be cleaned easily with a soft brush or vacuum.

UL Type(s)
FR-2
FR-83

Notes
1. Available in Flat Black.
2. USG 2570 has the option to be installed via staple or adhesive.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661
Rev. 6-26

The trademarks USG, CLIMAPLUS, FIFTH AVENUE, FIRECODE, FISSURED, RADAR, IT'S YOUR WORLD. BUILD IT., the USG logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.