


ELECTRIC WATER HEATERS



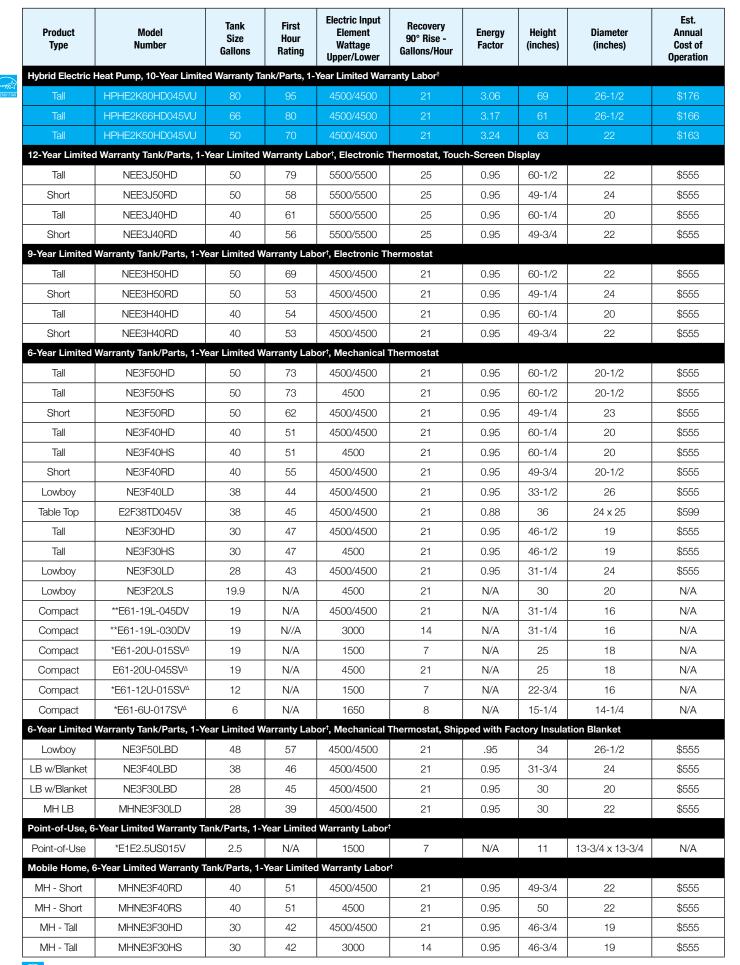

ENERGY STAR® Qualified Models

Standard voltage for all models is 240 VAC single phase power.

†For complete information consult written warranty 120 VAC single phase power *SIde water connections

Energy Factor ratings shown for Hybrid Electric Heat Pump units are based on operation in the Hybrid mode. Recovery Ratings shown for Hybrid Electric Heat Pump units are based on back up heating element performance.

Most models shipped from the factory with an insulation blanket will have a "B" as the next to last character in the model number. See the "Shipped with Factory section of the table above

U.S. Craftmaster® Water Heaters reserves the right to make product changes or improvements without prior notice. Dimensions in all charts shown in inches. Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. Some models may not be available in all markets.

[△]Top inlet/outlet water connections; compact models (6U/12U and 20U) may be field converted to side inlet/outlet



GAS WATER HEATERS (Available in Natural Gas or Propane*)

Product Type	Model Number	Tank Size Gallons	First Hour Rating	Natural Gas‡ BTU Input	Recovery 90° Rise - Gallons/Hour	Energy Factor	Height Δ (inches)	Diameter (inches)	Est. Annual Cost of Operation
2-Year Limited War	ranty Tank/Parts, 1-Year	Limited Warra	anty Labor [†] ,	Standard Vent (I	Not for Mobile Ho	me Use)			
Tall	NG2J5040T	50	82	40,000	41	0.62	61	22	\$263
Tall	NG2J4040T	40	70	40,000	41	0.62	62	20	\$263
Year Limited Warr	anty Tank/Parts, 1-Year L	imited Warra	nty Labor†, E	lectronic Therm	ostat				
Tall	NG1H5040T	50	82	40,000	41	0.60	61	21	\$272
Tall	NG2H4040T	40	70	40,000	41	0.62	62	20	\$263
Short	NG2H4040S	40	67	40,000	41	0.62	52-1/2	22	\$263
Year Limited Warr	anty Tank/Parts, 1-Year L	imited Warra	nty Labor⁺, N	lechanical Ther	mostat				
Tall	NG1F5040T*	50	82	40,000	41	0.60	61	21	\$272
Tall	NG2F4040T*	40	70	40,000	41	0.62	62	20	\$263
Short	NG2F4040S*	40	67	40,000	41	0.62	52-1/2	22	\$263
Tall	NG2F4034T*	40	56	34,000	35	0.62	61	20	\$263
Tall	NG2F3030T*	30	55	30,000	31	0.63	60	18	\$259
Short	NG2F3030S*	30	50	30,000	31	0.63	49	20	\$259
Year Limited Warr	anty Tank/Parts, 1-Year L	imited Warra	nty Labor,†S	hipped with Fac	tory Insulation Bl	anket			
Tall with Blanket	NG1F3035TB*	30	64	35,000	36	0.63	62	16	\$259
ear Limited Warr	anty Tank/Parts, 1-Year L	imited Warra	nty Labor†, N	lechanical Ther	mostat				
Tall	NG2C4034T	40	56	34,000	35	0.62	61	20	\$263
rect Vent, 6-Year L	imited Warranty Tank/Pa	arts, 1-Year Li	mited Warra	nty Labor† (Not i	or Mobile Home (Jse)			
Direct Vent	DVG62-50T40-NOV**	50	91	40,000	43	0.62	59	22	\$263
Direct Vent	DVG62-40S38-NOV**	40	72	38,000	41	0.63	50	22	\$259
werFlex®, 6-Year I	Limited Warranty Tank/Pa	arts, 1-Year Li	mited Warra	nty Labor† (Not	for Mobile Home	Use)			
PowerFlex®	PVG62-75T76-NVS**	75	N/A	76,000	80.4	N/A	61-1/4	26	N/A
PowerFlex®	PVG62-50S62-NVS**	50	110	62,000	69.3	0.70	61-1/8	24	\$233
PowerFlex®	PVG62-50S40-NVS**	50	90	40,000	44.7	0.70	60-1/8	24	\$263
PowerFlex®	PVG62-50T50-NVS**	50	96	50,000	55.9	0.70	68-1/8	22	\$233
PowerFlex®	PVG62-40S40-NVS**	40	73	40,000	44.7	0.70	59	22	\$233
PowerFlex®	PVG62-40T50-NVS**	40	90	50,000	55.9	0.70	68-1/2	20	\$233
werFlex® Direct, 6	6-Year Limited Warranty 1	ank/Parts, 1-	Year Limited	Warranty Labo	r [†] (Not for Mobile	Home Use)			
owerFlex® Direct	PDVG62-75T76-NV	75	N/A	76,000	82.4	N/A	70-5/8	26	N/A
owerFlex® Direct	PDVG62-50T62-NV**	50	115	62,000	72.6	0.71	69	22	\$230
owerFlex® Direct	PDVG62-50T45-NV**	50	93	45,000	50.3	0.70	67-1/2	22	\$233
owerFlex® Direct	PDVG62-40S40-NV**	40	71	40,000	45.2	0.71	58-1/4	22	\$233
	ard-Vent w/ Convertible C			<u> </u>					
Mobile Home	MHG62 40T40	40	71	40,000	41	0.62	62	20	\$263
Mobile Home	MHG62 30T30	30	54	30,000	31	0.63	60	18	\$259
	-Vent w/ Convertible Con			•					
Mobile Home	MHDV-62-40T32-3NV	40	61	32,000	33	0.62	58-3/4	20	\$263
Mobile Home	MHDV-62-30T30-3NV	30	49	30,000	31	0.63	58	18	\$259
	imited Warranty Tank/Pa			· · · · · · · · · · · · · · · · · · ·					Ψ <u></u>
Large Capacity	G62-100T77-4NV	100	N/A	75,100	81	N/A	68-1/2	27-3/4	N/A
Large Canaciiv									



ENERGY STAR® Qualified Models

For models shipped from the factory with an insulation blanket there is "B" as the last character in the model number. For example: NG1F3030TB.

U.S. Craftmaster® Water Heaters reserves the right to make product changes or improvements without prior notice. Dimensions in all charts shown in inches. Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. Some models may not be available in all markets.

For complete information consult written warranty.

A Height dimension is to the top of the draft diverter for all models except Atmospheric Direct-Vent models.

* For propane model change the "N" to "L"

** Atmospheric Direct Vent, PowerFlex® and PowerFlex® Direct models. For Propane model change "N" to "P". Heights shown are to the top of jacket, 40 gallon model requires 67" minimum and 50 gallon model requires 76" minimum vertical clearance for factory provided/required coaxial vent kits. These coaxial vent kits for these models terminates horizontally through a side wall only.