




# 2020 Product Catalog

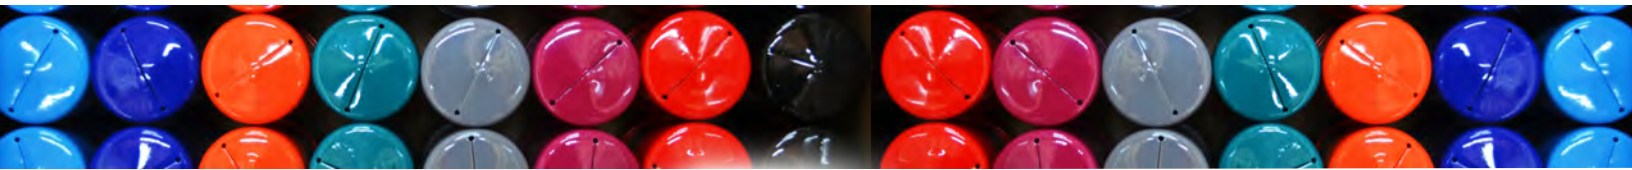

MADE IN  U.S.A.!

## CONTENTS

Standard Series... 1,2,3

Tethered Series... 4,5

Matte Series... 6

Uses for Containers... 7,8

Merchandising... 9

Technical Information... 10

Contact Information... Back


viewtainer.com

# STANDARD SERIES

ALL CONTAINER SERIES ARE PERFECT FOR:

HARDWARE • TOOLS • FARM •  
HOUSEHOLD • CRAFTS • OFFICE •  
PETS • HOBBY • MANUFACTURING

Available Colors:



## 2" Diameter

\*Also Available with Non-Slit Tops



**CC24**  
2" x 4"  
(5 X 10 cm)




**CC26**  
2" x 6"  
(5 X 15 cm)



**CC2775**  
2" x 7.75"  
(5 X 19.7 cm)

## Hanging Cap

\*Hanging series comes with both ends glued with a standard slit cap on bottom. Simply press on slit-top to create funnel to fill.



**CCH24**  
2" x 4"  
(5 X 10 cm)



**CCH26**  
2" x 6"  
(5 X 15 cm)



New Size!



**CCH27508**  
2.75" x 8"  
(7 X 20 cm)

*Standard Series has the Original Glossy Colors and Squeeze Me Dispensing!*



2

## 2.75" Diameter

\*Also Available with Non-Slit Tops



**CC27505**  
2.75" x 5"  
(7 X 13 cm)



**CC27508**  
2.75" x 8"  
(7 X 20 cm)



**CC27510**  
2.75" x 10"  
(7 X 25 cm)



**CC27512**  
2.75" x 12"  
(7 X 30 cm)



**CC27515**  
2.75" x 15"  
(7 X 38 cm)

AVAILABLE IN STORES OR ONLINE. GO TO [VIEWTAINER.COM](http://VIEWTAINER.COM)

3

# STANDARD SERIES

## • Packs!



CCVP6

6 PACK

COLOR OPTIONS!

•PRIMARY •PASTEL

GREAT STARTER  
PACK!

Each pack contains: 2 EA. CC24,  
1 EA. CC26, CC2775, CC27505, CC27508  
Slit-top or Non-slit top versions available.

## • Pencil Holders!

Pencil Holder  
Available  
Colors:

1-Red

4-Black

14-Medium  
Gray

3-Blue

7-Raspberry



CC27505P

2.75" x 5" Pencil Holder  
(7 X 13 cm)

Better than an old coffee mug!

Try our convenient pencil holder!



## • Specialty!



4-Black

5-Pink

CC7806

7/8" x 6" Container  
(2 X 15 cm)

Great for drill bits, blades,  
sequins, beads, etc.!

# TETHERED SERIES

4

Tethered Series Colors  
in 2" & 2.75" diameter

## 2" Diameter

## 2.75" Diameter



**CCRT24**  
2" x 4"  
(5 X 10 cm)




**CCRT26**  
2" x 6"  
(5 X 15 cm)



**CCRT27505**  
2.75" x 5"  
(7 X 13 cm)



**CCRT27508**  
2.75" x 8"  
(7 X 20 cm)



**CCRT27515**  
2.75" x 15"  
(7 X 38 cm)



**CCRT27526**  
2.75" x 26"  
(7 X 66 cm)

- 1-Red
- 2-Green
- 3-Blue
- 4-Black
- 5-Pink
- 6-White
- 7-Raspberry
- 8-Orange
- 9-Sky Blue
- 14-Medium Gray

5

- *Our widest Diameter!*
- *Can hold up to 9 lbs!*
- *Can't loose the Cap!*




## 3.625" Diameter



**CCRT362506**  
3.625" x 6"  
(9 X 15 cm)



**CCRT362508**  
3.625" x 8"  
(9 X 20 cm)

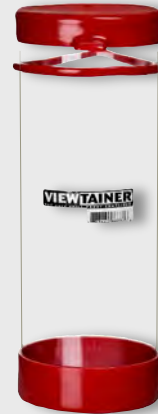

**CCRT362510**  
3.625" X 10"  
(9 X 25 cm)

**CCRT362537**  
3.625" X 37"  
(9 X 94 cm)



Tethered  
Series  
Colors: in  
3.625"  
diameter

1-Red

2-Green

3-Blue

4-Black

8-Orange

14-Medium  
Gray

AVAILABLE IN STORES OR ONLINE. GO TO [VIEWTAINER.COM](http://VIEWTAINER.COM)

# MATTE SERIES

- *Great grip!*
- *Rich colors!*
- *Matte finish!*

\*also available in non-slit tops.

6

## 2" Diameter



**CCT24**  
**2"X4"**  
(5 X 10 cm)



**CCT26**  
**2"x 6"**  
(5 X 15 cm)



**CCT2775**  
**2"X 7.75"**  
(5 X 19.7 cm)

## 2.75" Diameter



**CCT27505**  
**2.75"X5"**  
(7 X 13 cm)






**CCT27508**  
**2.75"x 8"**  
(7 X 20 cm)



**CCT27512**  
**2.75"x 12"**  
(7 X 30 cm)

Textured Matte  
Available  
Colors:



AVAILABLE IN STORES OR ONLINE. GO TO [VIEWTAINER.COM](http://VIEWTAINER.COM)

7

# Organ·i·za·tion:

- An efficient and orderly approach to tasks.



**KEEP  
CALM  
AND  
GET**

**ORGANIZED!**

USE COLORS! SIZES! CAP TYPES!



# WHY A VIEWTAINER?

## Because it Works Everywhere!



CRAFTS AND SEWING



TOOL CHESTS



GARAGE & WORK TRAILERS



PETS



OFFICE



TOOL KITS



MECHANICS



OUTDOORS



*What's your Viewtainer idea?*

# MERCHANDISING

- Displays made for your store

2" x 4"



2.75" x 5"



6-Packs



Tray-Packs

2.75" x 8"



2" x 6"



3-Packs



Free-standing  
Display



# TECHNICAL INFORMATION

## VINYL CAPS

| PROPERTIES  | STANDARD VINYL   |
|---|--|
| <b>MECHANICAL CHARACTERISTICS</b>                                   |  |
| SPECIFIC GRAVITY (density)  | 1.2  |
| TENSILE STRENGTH P.S.I  | 2100   |
| ELONGATION, %   | 400  |
| COMPRESSIVE STRENGTH, P.S.I   | —  |
| TEAR STRENGTH (astm D1004)  | 185 pli  |
| IMPACT STRENGTH, ft.lbs./in. of notch (1/2x1/2in. notched bar test) | —  |
| HARDNESS, ROCKWELL  | A60-70 (shore)   |
| <b>ELECTRICAL CHARACTERISTICS</b>                                   |  |
| VOLUME RESISTIVITY, ohm/cm <sup>3</sup> (50% RH and 23°C.)          | —  |
| DIELECTRIC CONSTANT, 60 cyc.  | —  |
| <b>SERVICE TEMPERATURES</b>   |  |
| CONTINUOUS °C/°F  | 93/200   |
| INTERMITTENT °C/°F  | 177/350  |
| BRITTLINESS °C/°F   | -32/-26  |
| <b>RESISTANCE CHARACTERISTICS</b>                                   |  |
| WATER ABSORB. 24hr., 1/8" thick, %                                  | —  |
| BURNING RATE (FLAMMABILITY), IN./MIN                                | SLOW   |
| EFFECT OF SUNLIGHT  | GOOD RESISTANCE  |
| EFFECT OF WEAK ACIDS  | VERY RESISTANT   |
| EFFECT OF STRONG ACIDS  | RESISTANT  |
| EFFECT OF WEAK ALKALIES   | RESISTANT  |
| EFFECT OF STRONG ALKALIES   | RESISTANT  |
| EFFECT OF ORGANIC SOLVENTS  | GOOD RESISTANCE TO ALCOHOLS, ALIPHATIC HYDROCARBONS AND OILS |
| MACHINE QUALITIES   | POOR   |
| CLARITY (NATURAL MATERIAL)  | CLEAR TO OPAQUE  |
| ABRASION RESISTANCE   | VERY GOOD  |

## PETG TUBES



### Technical Data Sheet Eastman Provista™ Copolyester

#### Application/Uses

- Candy packaging
- Displays, Fixtures and Point of purchase
- Food packaging
- Furniture guards
- Plastics for hygiene feminine products
- Frong channels
- Teething rails
- Tubing

#### Key Attributes

- Ease of processing
- Excellent chemical resistance
- Meets FDA regulations for food contact
- Sparking clarity and high gloss
- Toughness with flexibility

#### Product Description

Eastman Provista™ copolyester is a resin specifically developed for extrusion into profiles where aesthetics like high clarity and gloss, coupled with design flexibility drive demand. Compared to commonly used materials, Eastman Provista™ copolyester can often run on the most standard processing equipment at increased speeds. An extremely high melt strength makes the resin an excellent choice when extruding profiles into complicated shapes. This product is certified to ABS/USF Standard 53.

This product has been GREENGUARD INDOOR AIR QUALITY CERTIFIED™. The GREENGUARD INDOOR AIR QUALITY CERTIFIED™ Mark is a registered certification mark used under license through the GREENGUARD Environmental Institute (GEI). GEI is an industry-independent, non-profit organization that oversees the GREENGUARD Certification Program. The GREENGUARD Certification Program is an industry independent, third-party testing program for low-emitting products and materials for indoor environments. For more information about GEI and to obtain printable certificates for Eastman™ Copolyesters, visit [www.greenguard.org](http://www.greenguard.org). Choose Eastman Chemical Company under the Manufacturer category and click search to display a list of our products.

This product has been CRADLE TO CRADLE CERTIFIED™ Silver. The CRADLE TO CRADLE CERTIFIED™ Mark is a registered certification mark used under license through McDonough Braungart Design Chemistry (MBDC). MBDC is a global sustainability consulting and product certification firm. The CRADLE TO CRADLE™ framework moves beyond the traditional goal of reducing the negative impacts of commerce ("eco-efficiency"), to a new paradigm of increasing its positive impacts ("eco-effectiveness"). At its core, Cradle to Cradle design parades the safe and productive processes of nature's "biological metabolism" as a model for developing a "technical metabolism" flow of industrial materials. Product components can be designed for continuous recovery and neutralization as biological and technical nutrients within their metabolism. For more information about MBDC and to obtain printable certificates for Eastman Copolyesters, visit [www.cradle.com](http://www.cradle.com). Choose Eastman Chemical Company under Company Name in C2C Certified products to display a list of our products.

#### Typical Properties

| Property*                 | Test <sup>h</sup> Method | Typical Value, Units <sup>g</sup> |
|---------------------------|--------------------------|-----------------------------------|
| <b>General Properties</b> |                          |                                   |

## Continued...

|  |        |                                      |
|--|--------|--------------------------------------|
| Specific Gravity                                 | D 792  | 1.27                                 |
| <b>Mechanical Properties</b>                     |        |                                      |
| Tensile Stress @ Yield                           | D 638  | 50 MPa (7300 psi)                    |
| Tensile Stress @ Break                           | D 638  | 28 MPa (4100 psi)                    |
| Elongation @ Yield                               | D 638  | 4%                                   |
| Elongation @ Break                               | D 638  | 110%                                 |
| Flexural Modulus                                 | D 790  | 2100 MPa (3.0 x 10 <sup>5</sup> psi) |
| Flexural Strength                                | D 790  | 68 MPa (9900 psi)                    |
| Rockwell Hardness, R Scale                       | D 785  | 108                                  |
| Izod Impact Strength, Notched                    |        |                                      |
| @ 23°C (73°F)                                    | D 256  | 94 J/m (1.8 ft-lbf/in.)              |
| @ -40°C (-40°F)                                  | D 256  | 53 J/m (1.0 ft-lbf/in.)              |
| Impact Strength, Unnotched                       |        |                                      |
| @ 23°C (73°F)                                    | D 4812 | NB                                   |
| @ -40°C (-40°F)                                  | D 4812 | NB                                   |
| Impact Resistance (Puncture), Energy @ Max. Load |        |                                      |
| @ 23°C (73°F)                                    | D 3763 | 36 J (27 ft-lbf)                     |
| @ -40°C (-40°F)                                  | D 3763 | 35 J (26 ft-lbf)                     |
| <b>Thermal Properties</b>                        |        |                                      |
| Deflection Temperature                           |        |                                      |
| @ 0.455 MPa (66 psi)                             | D 648  | 70°C (158°F)                         |
| @ 1.82 MPa (264 psi)                             | D 648  | 62°C (143°F)                         |
| Vicat Softening Temperature @ 1 kg load          | D 1525 | 83°C (181°F)                         |
| <b>Optical Properties</b>                        |        |                                      |
| Haze   | D 1003 | 0.6%                                 |
| Regular Transmittance                            | D 1003 | 87%                                  |
| Total Transmittance                              | D 1003 | 90%                                  |
| Gloss @ 60°                                      | D 2457 | 152                                  |
| <b>Typical Processing Conditions</b>             |        |                                      |
| Drying Temperature                               |        | 71°C (160°F)                         |
| Drying Time                                      |        | 6 hrs                                |
| Processing Melt Temperature                      |        | 249-271°C (480-520°F)                |
| Mold Temperature                                 |        | 16-38°C (60-100°F)                   |

\* Unless noted otherwise, all tests are run at 23°C (73°F) and 50% relative humidity.  
<sup>h</sup> Unless noted otherwise, the test method is ASTM.  
<sup>g</sup> Units are in SI or US customary units.

VIEWTAINER CAPS ARE MADE FROM 100% VINYL, NO FILLERS! SOME COLORS (DUE TO PIGMENT OR MIXTURE) CAN LEACH A SMALL AMOUNT OF PLASTICIZER. SIMPLY WASH WITH SOAP AND WATER. CAPS AND TUBES ARE NON-TOXIC AND CONTAIN NO BPA. TUBES ARE RATED FOR FOOD PACKAGING, THE CAPS ARE INDUSTRIAL GRADE, BUT CAN BE SPECIAL ORDERED IN MEDICAL GRADE. HAND WASH ONLY! ADHESIVE USED FOR CAPS IS A PVC SOLVENT RATED FOR POTABLE WATER. CONTACT SALES FOR ADDITIONAL INFORMATION ON OUR PRODUCTS OR USES! **WARNING:** This product can expose you to chemical di-isononyl phthalate which is known to the State of California to cause cancer, and di-isodecyl Phthalate, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# Thousands of Uses!



DBA OF



Sold Around the World!  
Available Locally at:

Didn't see the size you want?  
We can Help!

**CUSTOM CONTAINER  
CONFIGURATIONS AVAILABLE!**

12740 DANIELSON COURT STE D  
POWAY, CA 92064 U.S.A.  
1-888-865-9935 TOLL FREE  
1-858-486-1818 TEL  
1-858-486-1877 FAX

Email: [Info@viewtainer.com](mailto:Info@viewtainer.com)

[www.viewtainer.com](http://www.viewtainer.com)

