

## Engineering Specification

Job Name \_\_\_\_\_  
 Job Location \_\_\_\_\_  
 Engineer \_\_\_\_\_  
 Approval \_\_\_\_\_

Contractor \_\_\_\_\_  
 Approval \_\_\_\_\_  
 Contractor's P.O. No. \_\_\_\_\_  
 Representative \_\_\_\_\_

# LEAD FREE\*

## Series LF007 Double Check Valve Assemblies

Sizes: 1/2" – 3"

Series LF007 Double Check Valve Assemblies shall be installed at referenced cross-connections to prevent the backflow of polluted water into the potable water supply. Only those cross-connections identified by local inspection authorities as non-health hazard shall be allowed the use of an approved double check valve assembly. The LF007 features Lead Free\* construction to comply with Lead Free\* installation requirements.

Check with local authority having jurisdiction regarding vertical orientation, frequency of testing or other installation requirements.


The valve shall meet the requirements of ASSE Std. 1015 and AWWA Std. C510. Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

### Features


- Ease of maintenance — only one cover
- Top entry
- Replaceable seats and seat discs
- Modular construction
- Compact design
- Lead Free\* cast copper silicon alloy body construction — 1/2" – 2"
- Fused epoxy coated cast iron body — 2 1/2" – 3"
- Top mounted Lead Free\* ball valve test cocks
- Low pressure drop
- No special tools required for servicing
- 1/2" – 1" have tee handles

### Specifications

A Double Check Valve Assembly shall be installed at each noted location. The assembly shall consist of two positive seating check modules with captured springs and rubber seat discs. The check module seats and seat discs shall be replaceable. Service of all internal components shall be through a single access cover secured with stainless steel bolts. The Double Check Valve Assemblies shall be constructed using Lead Free\* cast copper silicon alloy. Lead Free\* Double Check Valve Assemblies shall comply with state codes and standards, where applicable, requiring reduced lead content. The assembly shall also include two resilient seated isolation valves; four top mounted, resilient seated test cocks. The assembly shall meet the requirements of ASSE Std. 1015 and AWWA Std. C510. Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California. Assembly shall be a Watts Series LF007.

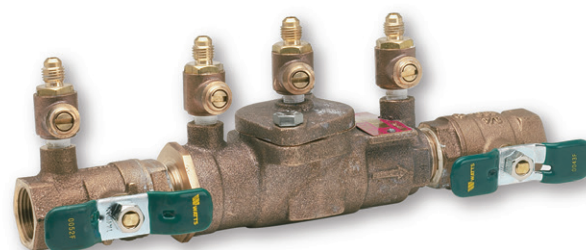

3/4" LF007M3QT

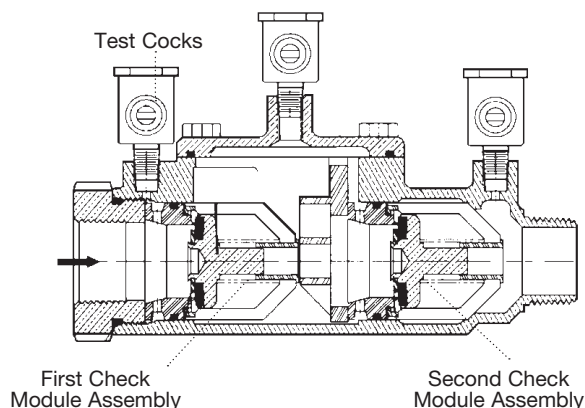

The LF007 Series features a modular design concept which facilitates complete maintenance and assembly by retaining the spring load.

**Now Available**  
**WattsBox Insulated Enclosures.**

For more information, send for literature ES-WB.

### NOTICE

Inquire with governing authorities for local installation requirements

### NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

\*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

## Pressure — Temperature

### ½" – 2"

Temperature Range: 33°F – 180°F (0.5°C – 82°C).

Maximum Working Pressure: 175psi (12.1 bar).

### 2½" – 3"

Temperature Range: 33°F – 110°F (0.5°C – 43°C) continuous,  
140°F (60°C) intermittent.

Maximum Working Pressure: 175psi (12.1 bar).

## Standards

ASSE Std. 1015, AWWA Std. C510

IAPMO PS31, CSA B64.5

## Approvals

† ASSE, AWWA, IAPMO, CSA, UPC



▲ Approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California.

• Models with suffix LF and S are not listed.

◆ UL Classified (without shutoff valves only) ¾" – 2"  
(except 007M3LF)

◆ UL Classified with OSY gate valves  
(2½" and 3" horizontal only.)

▼ ½" - 2" models Lead Free\* with strainer

Horizontal and vertical "flow up" approval on all sizes

## Models

### Sizes:

### ½" – 2"

### Suffix:

S – copper silicon alloy strainer  
LF – without shutoff valves  
W/Press\*\* – press inlet x press outlet (½" - 2" only)

### Prefix:


U – Union connections

### 2½" – 3"


### Suffix:

NRS – non-rising stem resilient seated gate valves  
OSY – UL/FM outside stem and yoke resilient seated gate valves  
LF – without shutoff valves  
QT-FDA – FDA epoxy coated quarter-turn ball valves

**\*\* Viega ProPress® connections are optional factory-installed fitting on each end of the approved/certified assembly.**

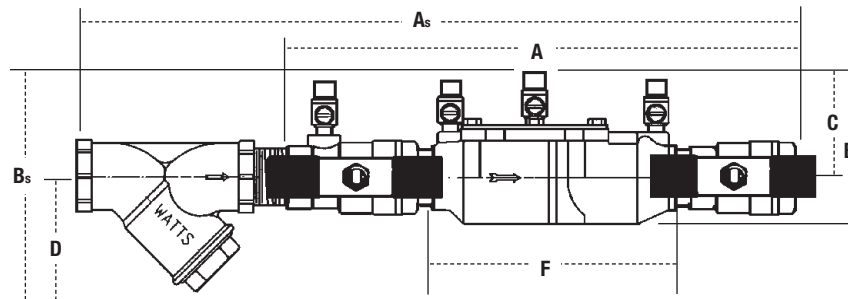

Subscript 'S' = strainer model




## Dimensions – Weights

MODEL	SIZE	DIMENSIONS												WEIGHT					
		A		B		C		D		F		G		R		T			
	<i>in.</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>lbs.</i>	<i>kgs.</i>
†▲▼ LF007QT	½	10	254	4⅝	117	2⅞ <sub>16</sub>	62	—	—	5	127	3⅝	85	2⅞ <sub>16</sub>	59	2⅞ <sub>16</sub>	52	4.5	2
†▲▼ LF007M3QT	¾	11⅞	282	4	102	3⅝	79	—	—	6⅞ <sub>16</sub>	157	3⅞ <sub>16</sub>	87	2⅞ <sub>16</sub>	54	1⅞ <sub>16</sub>	33	5	2.3
†▲▼ LF007M1QT	1	13¼	337	5⅞	130	4	102	—	—	7½	191	3⅝	85	1⅞ <sub>16</sub>	43	1⅞ <sub>16</sub>	43	12	5.4
†▲▼ LF007M2QT	1¼	16⅞	416	5	127	3⅞ <sub>16</sub>	84	—	—	9½	241	5	127	3	76	2	50	15	6.8
†▲▼ LF007M2QT	1½	16¾	425	4⅞	124	3½	89	—	—	9¾	248	5⅞ <sub>16</sub>	148	3⅞	79	2⅞ <sub>16</sub>	68	15.9	7.2
†▲▼ LF007M1QT	2	19½	495	6¼	159	4	102	—	—	13¾	340	6⅞	156	3⅞ <sub>16</sub>	87	2⅞ <sub>16</sub>	68	25.7	11.7
●▼ LF007QT-S	½	13	330	6	152	2⅞ <sub>16</sub>	62	3	76	5	127	3⅝	85	2⅞ <sub>16</sub>	59	2⅞ <sub>16</sub>	52	5.5	2.5
●▼ LF007M3QT-S	¾	14½	368	6⅞	156	3⅝	79	3	76	6⅞ <sub>16</sub>	157	3⅞ <sub>16</sub>	87	2⅞ <sub>16</sub>	54	1⅞ <sub>16</sub>	33	6.7	3.1
●▼ LF007M1QT-S	1	17⅞ <sub>16</sub>	456	7¾	197	4	102	3¼	83	7½	191	3⅝	85	1⅞ <sub>16</sub>	43	1⅞ <sub>16</sub>	43	14	6.4
●▼ LF007M2QT-S	1¼	21½	546	7⅞ <sub>16</sub>	179	3⅞ <sub>16</sub>	84	3½	83	9½	241	5	127	3	76	2	50	19	8.6
●▼ LF007M2QT-S	1½	21¾	552	7⅞ <sub>16</sub>	179	3½	89	3¼	95	9¾	248	5⅞ <sub>16</sub>	148	3⅞	79	2⅞ <sub>16</sub>	68	19.6	8.9
●▼ LF007M1QT-S	2	25¾	654	8¼	222	4	102	4	102	13¾	340	6⅞	156	3⅞ <sub>16</sub>	87	2⅞ <sub>16</sub>	68	33.5	15.2

## Dimensions – Weights

Sizes: 2½" – 3"

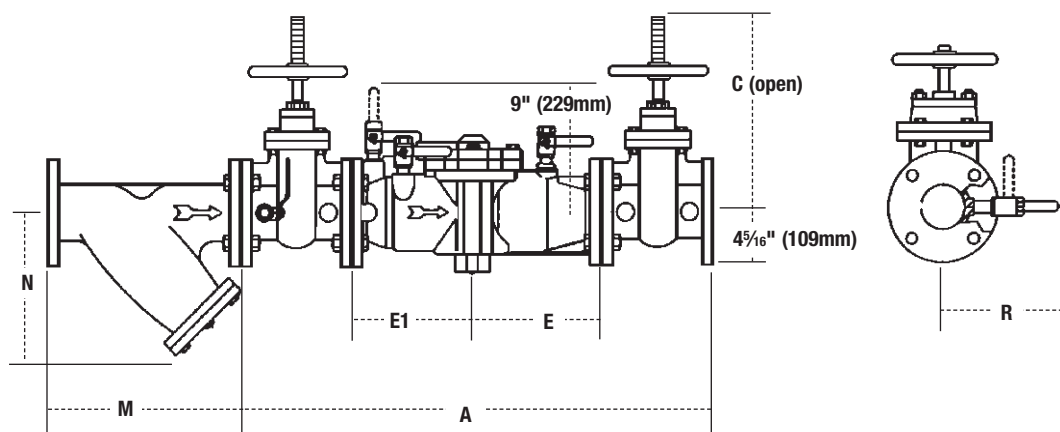


MODEL	SIZE	DIMENSIONS						WEIGHT	
	in.	A							
		in.	mm	in.	mm	in.	mm	in.	mm
LF007QT-FDA	2½	33⅛	841	6⅜	162	9⅛	230	8¾	222
▲ LF007-NRS	2½	33⅛	841	9⅜	238	9⅛	230	8¾	222
▲♦ LF007-OSY	2½	33⅛	841	16⅜	416	9⅛	230	8¾	222
LF007-QT-FDA	3	34¼	870	6⅜	162	9⅛	230	8¾	222
▲ LF007-NRS	3	34¼	870	10¼	260	9⅛	230	8¾	222
▲♦ LF007-OSY	3	34¼	870	18⅞	479	9⅛	230	8¾	222

### Strainer Dimensions

SIZE	WEIGHT			
	M	N		
in.	in.	mm	in.	mm
2½	10	254	6½	165
3	10⅛	267	7	178

## 1" LFU007M1QT

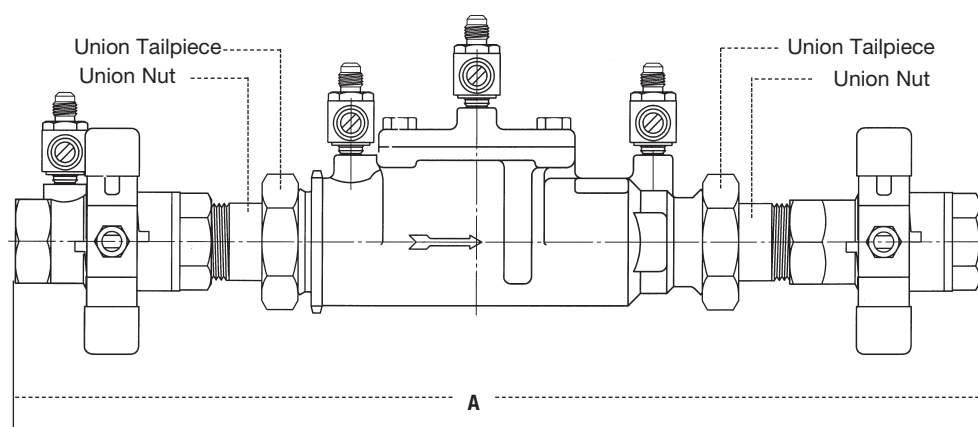

Sizes: ½" – 2"

MODEL	SIZE	DIMENSIONS	
		A	
	in.	in.	mm
LFU007QT	½	12⅛	326
LFU007M2QT	¾	13⅜	350
LFU007M2QT	1	16⅞	422
LFU007M2QT	1¼	20¾	527
LFU007M2QT	1½	21½	546
LFU007M1QT	2	24½	622

# Capacity

As compiled from documented Foundation for Cross-Connection Control and Hydraulic Research at the University of Southern California lab tests.

†† Typical maximum system flow rate (7.5 feet/sec., 2.3 meters/sec.)

\*\* UL rated flow

