

GD1471 - DOWNTOWN


GD1471 - DOWNTOWN

SPECIFICATIONS

DOOR PREP	Cross Bore 2-1/8" Edge Bore 1"
BACKSET	Adjustable to 2-3/8" or 2-3/4"
DOOR THICKNESS	1-3/8"–1-3/4" doors standard thickness Thick door service part available for up to 2-1/4"
CYLINDER	Standard SmartKey Kwikset or Weiser 5pin pin & tumbler available
FACEPLATE	1" x 2-1/4" Square, radius corner and drive-in standard
STRIKES	1-1/8" x 2-3/4" square or round corner
BOLT	1" throw
DOOR HANDING	Reversible for right or left-hand doors
ANSI/BHMA	A156.5 Grade 1
UL AVAILABILITY	Meets 20 minute
ASTM	All Weiser product meets ASTM E 331 water penetration testing


SPECIFICATIONS

PRODUCT DIMENSIONS

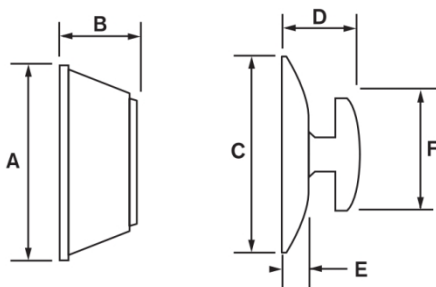


	A	B	C	D	E	F
GD 1471 – Downtown	2-5/8"	½"	2-5/8"	1-3/8"	7/16"	1-8/13"

6-WAY ADJUSTABLE LATCH

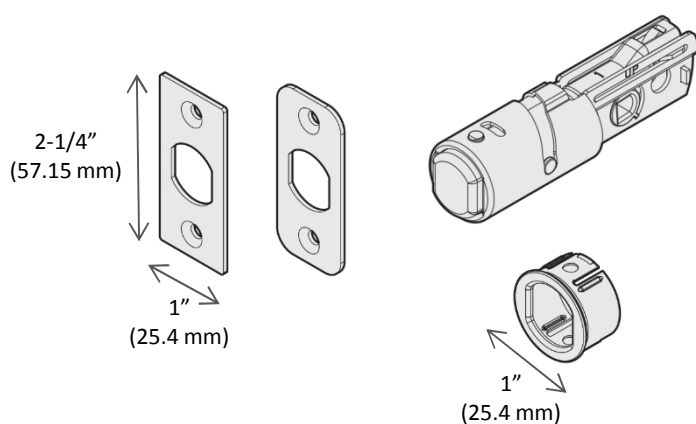


SQUARE CORNER

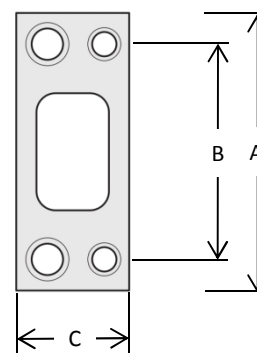

A	2-3/4" (69.85 mm)
B	2-1/8" (53.975 mm)
C	1" (28.321 mm)

RADIUS CORNER

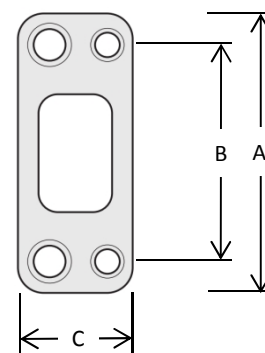

PRODUCT AVAILABILITY



VENETIAN BRONZE SATIN NICKEL POLISHED CHROME SATIN CHROME IRON BLACK

			Venetian Bronze	Satin Nickel	Polished Chrome	Satin Chrome	Iron Black
GD1471 RDT	Single Cylinder	☐	☐	☐	☐	☐	☐