

LAYTON

HALL/CLOSET



BED/BATH



KEYED ENTRY




INACTIVE

SPECIFICATIONS


DOOR PREP	Cross Bore 2-1/8" Edge Bore 1" Latch Face 1"x2-1/4"
BACKSET	Adjustable to 2-3/8" or 2-3/4" 2-3/8" optional
DOOR THICKNESS	1-3/8"–1-3/4" doors standard thickness
CYLINDER	P&T(5 pin).
FACEPLATE	1"x2-1/4" Must specify square radius or drive-in
STRIKES	2-1/4" full lip. Specify round corner or square corner
BOLT	1/2" throw. Nickel plated
DOOR HANDING	Reversible for right or left handed doors
ANSI/BHMA	A156.2 Grade 3
ADA	Yes
UL AVAILABILITY	Meets UL 3 hour fire rating for all UL functions
ASTM	All Weiser product meets ASTM E 331 water penetration testing

PRODUCT DIMENSIONS

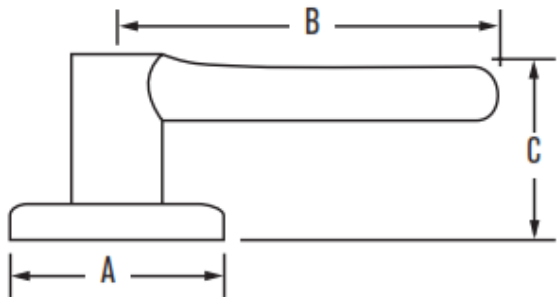


	A	B	C	C (Keyed)
Layton	2-9/16"	3-5/8"	2-3/8"	2-3/8"


FIXED FACEPLATE LATCH

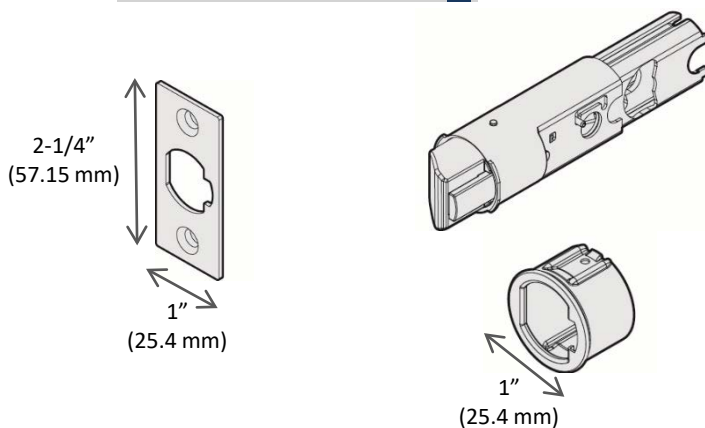

FULL LIP SQUARE CORNER




FULL LIP RADIUS CORNER



A	2-1/4" (57.15 mm)
B	1-5/8" (41.275 mm)
C	1-3/4" (44.45 mm)

PRODUCT AVAILABILITY

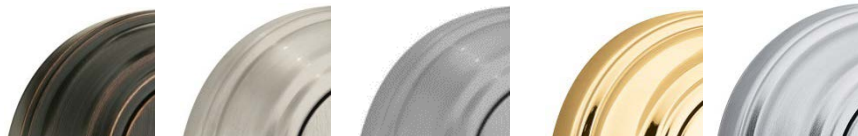

VENETIAN BRONZE SATIN NICKEL ANTIQUE NICKEL BRASS SATIN CHROME

		20 min.	3 Hour	Venetian Bronze	Satin Nickel	Antique Nickel	Brass	Satin Chrome
Passage	SL1000LY	☐	☐	☐	☐	☐	☐	☐
Privacy	SL3000LY	☐	☐	☐	☐	☐	☐	☐
Entry	SL5000LY	☐	☐	☐	☐	☐	☐	☐
Inactive	SL7000LY	☐	☐	☐	☐	☐	☐	☐