

# REINFORCING ALL YOUR BUILDING SUPPLY NEEDS


## A STRAIGHT, STRONG AND LEVEL FOUNDATION STARTS ANY PROJECT OFF RIGHT

Weyerhaeuser Distribution is your single-source solution for the best in reinforcing steel. Through partnerships with trusted suppliers, Weyerhaeuser distributes a wide selection of steel products to fit your size and length needs.

Weyerhaeuser understands the value in buying domestic and has placed our trust in purchasing primarily from US-based rebar and remesh manufacturers.

### Forming components available from Weyerhaeuser include:

- **Rebar:** Manufactured to ASTM A-615 and ASTM A-615M standards. Available in lengths from 20' to 40'.
- **Construction stakes:** High-tensile steel in round, square or flat lengths of 1' to 4'.
- **Cut Rebar:** Rebar cut into 1' to 10' lengths.
- **Wire:** Tie wire, black and galvanized annealed wire in a variety of gauges.
- **Remesh:** Manufactured to ASTM A-1064 standards. Available in roll, sheet or mini-mats in popular lengths, sizes and gauges.

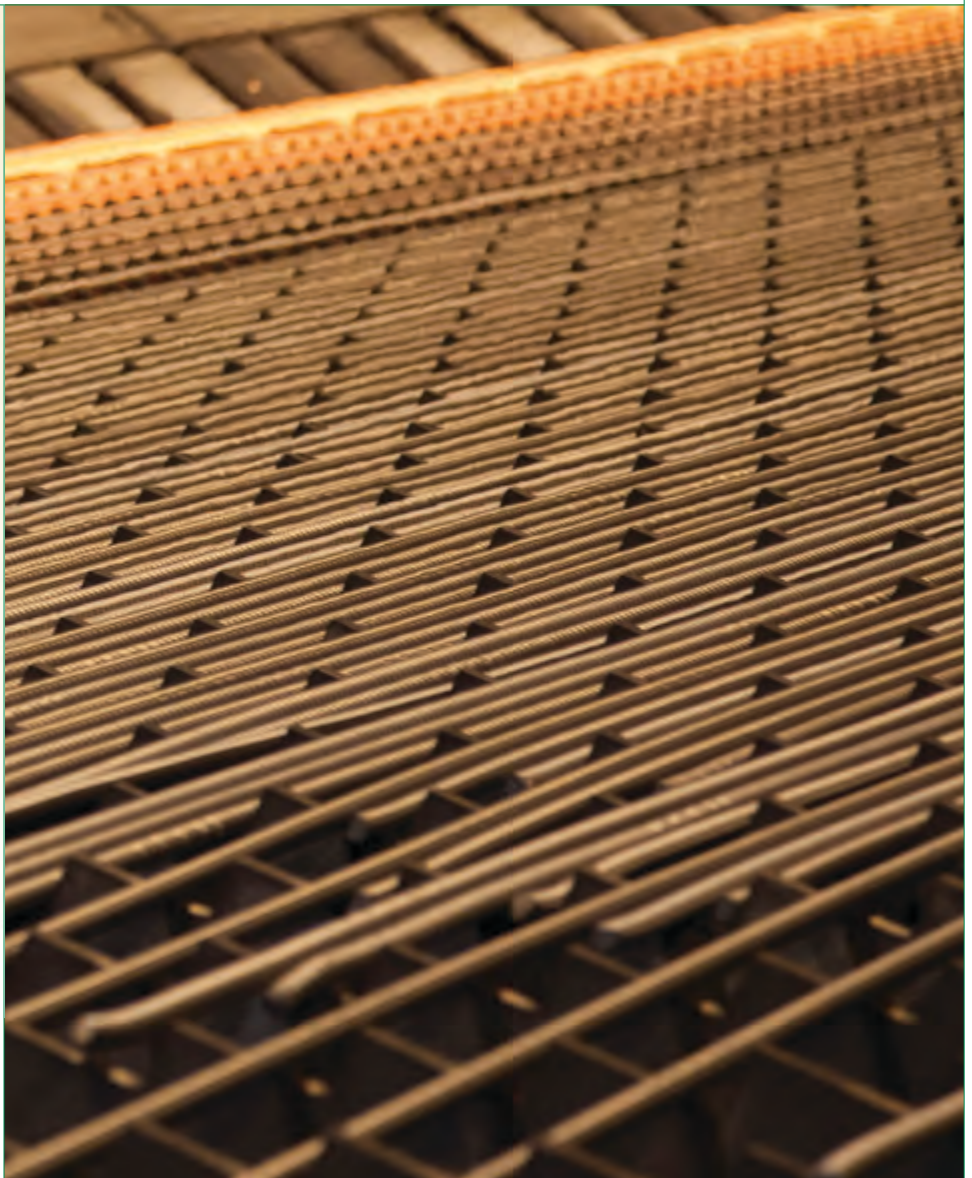

**REINFORCING STEEL FROM WEYERHAEUSER DISTRIBUTION**

# STRAIGHT AND STRONG FROM THE START

**Stop paying for commodity steel that doesn't perform.** Instead, save time, reduce costs and increase productivity by starting out with high-quality rebar from Weyerhaeuser Distribution.

**REBAR WEIGHTS**

Size	Weight per Foot	Weight per Piece (lbs)			Pieces per Bundle <sup>(1)</sup>		
		20'	30'	40'	20'	30'	40'
#3 (3/8)	0.376	7.52	11.25 <sup>(2)</sup>	15.04	266	Inquire	266
#4 (1/2)	0.668	13.36	20.04	26.72	150	150	220
#5 (5/8)	1.043	20.86	31.29	41.72	96	160	144
#6 (3/4)	1.502	30.04	45.06	60.08	68	112	84

(1) Pieces per bundle are approximate. They will vary depending upon manufacturer.

(2) Special order size; please inquire with your local Weyerhaeuser representative.

**Note:** Sizes and lengths vary by location. Consult with your Weyerhaeuser representative for availability.

**REBAR GRADES AND DESIGNATIONS**

Grade of Steel	Grade Mark	Grade Line <sup>(1)</sup>	Min. Yield	Min. Tensile
Grade 40	Blank	No line	40,000 psi	60,000 psi
Grade 60	60	One line	60,000 psi	90,000 psi
Grade A706	60	One line	60,000 psi	80,000 psi

(1) Grade lines must be at least five deformation spaces long.

**REBAR DIAMETERS**

Imperial Bar Size	Diameter (in.)
#3	0.375
#4	0.500
#5	0.625
#6	0.750
#7	0.875
#8	1.000
#9	1.128
#10	1.270
#11	1.410

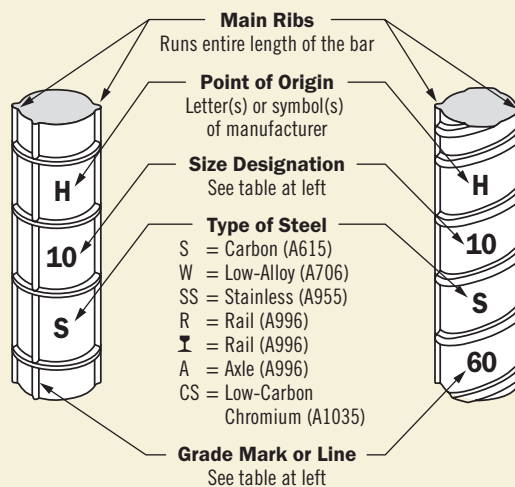


Table data and bar marking requirements provided courtesy of Concrete Reinforcing Steel Institute (CRSI).



Save time by ordering quality reinforcing steel from Weyerhaeuser—your one convenient source for all your building supply needs.

Our network of sales centers and reload facilities are positioned throughout North America:

**WEST COAST**

- Tacoma, WA
- Albany, OR
- Redding, CA
- Stockton, CA
- Fresno, CA
- Santa Clarita, CA
- Fontana, CA
- Phoenix, AZ
- Boise, ID
- Salt Lake City, UT


**EAST COAST**

- New Haven, CT\*
- Easton, PA
- Edison, NJ\*
- Baltimore, MD\*
- Richmond, VA
- Charlotte, NC
- Atlanta, GA
- Jacksonville, FL
- Tampa, FL\*

**CENTRAL**

- Denver, CO
- Dallas, TX
- Houston, TX

\* Reload facility only; no sales office at this location.

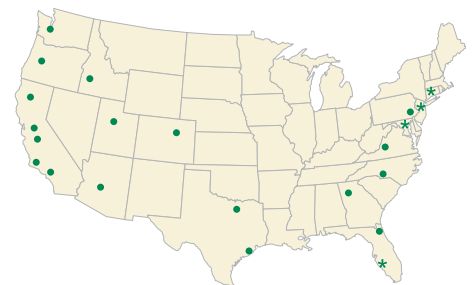


**CONTACT US** | 888.453.8358 | [WEYERHAEUSER.COM/DISTRIBUTION](http://WEYERHAEUSER.COM/DISTRIBUTION)



Weyerhaeuser is a proud supporter of US-based steel manufacturers

February 2018  
Reorder SBP-4100

 and Weyerhaeuser are registered trademarks of Weyerhaeuser NR.  
© 2018 Weyerhaeuser NR Company. All rights reserved.