

**MARBLE
LOOK**

USAGE

-  FLOOR
-  WALL
-  COUNTERTOP
-  SHOWER FLOOR
-  EXTERIOR FLOOR
-  STEPWISE™

- SPECIAL FEATURES**
-  TRU-EDGE™
 -  MADE IN THE U.S.A.
 -  LARGE FORMAT

-  MOSAIC/DECO
-  ENCAUSTIC
-  TERRAZZO
-  PAVER
-  CUSTOMIZE
-  FLEXFIT™

 PG

 LOW **S** HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:

-  12 x 24 Floor Tile
-  12 x 12 Floor Tile
-  4 x 12 Wall Tile
-  2 x 2 Mosaic

FINISHES: MATTE | POLISHED

GLAZED PORCELAIN FLOOR TILE



CALACATTA SKY CT75



CLOSE-UP



CALACATTA EMPIRE CT76




CLOSE-UP

GLAZED CERAMIC MOSAIC TILE





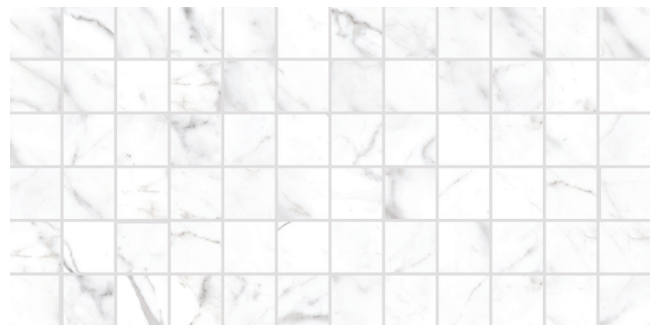

CALACATTA SKY CT75



CALACATTA EMPIRE CT76

-  SLIP RESISTANT
-  WATERPROOF
-  STAIN PROOF
-  DENT PROOF
-  SCRATCH-RESISTANT™
*Applicable to products with Matte and Textured Finishes
-  FIRE-RESISTANT™
*Not Applicable to Mesh-Mounted Mosaics
-  CLIMATEPRO™
-  SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 24 Floor Tile	11-13/16" x 23-13/16" (30.00 cm x 60.48 cm)	5/16"	15.60	8
	12 x 12 Floor Tile▼	11-13/16" x 11-13/16" (30.00 cm x 30.00 cm)	5/16"	14.55	15
	4 x 12 Wall Tile	(4-1/4" x 12-7/8") (10.91 cm x 32.77 cm)	5/16"	10.64	28
	2 x 2 Mosaic (Dot-mounted)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12

▼ Calacatta Empire CT76 only

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓**
Wet & Level – Interior Floor	≥ 0.42	✓**
Shower Floors (Residential or Light Commercial)	≥ 0.42	✓*
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓**
Pool Linings	N/A	✓*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile suitable for exterior applications in non-freezing climates, when proper installation methods are followed.



* Mosaic tile only

** Wall tile not suitable for this application.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

TRIM

Type	Number	Size	Pieces/ Carton
 Jolly	S-1/212J	1/2 x 12	12
 Bullnose	P-43C9	3 x 12	30

INSTALLATION

Grout Joint Recommendation	Shade Variation
----------------------------	-----------------

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)



Wall: 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)

Mosaic: 1/8"

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Result	Wall Result	Mosaic Result
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbs	120-230 lbs	> 250 lbs
Scratch Hardness	MOHS	8.0	4.0-6.0	8.0
Chemical Resistance	C650	Resistant	Resistant	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3	All Residential / Light Commercial
2 All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.