



Revo Tile™

REAL BEAUTY. REAL PORCELAIN. REAL FAST.

BY  daltile®

Revo=Tile™

REAL BEAUTY. REAL PORCELAIN. REAL FAST.

BY  daltile

REVOLUTIONARY

NEW PORCELAIN TILE INSTALLS

OVER 2X FASTER*

WITH **CLIC=FIT™** Technology

INSTALL IN 3 EASY STEPS...

PLACE


PLACE UNDERLAYMENT
NO MORTAR REQUIRED

CLICK

CLICK TILES TOGETHER

GROUT

GROUT IMMEDIATELY,
NO WAIT TIME



FEATURING

CLIC=FIT™
Technology

LOVE

 BEAUTY OF **REAL** PORCELAIN TILE
UNMATCHED **DURABILITY**

MAXIMUM DURABILITY
FROM THE ORIGINAL **WATERPROOF** FLOOR

- NO MORTAR, **NO MESS**
- JUST **CLICK** TILE TOGETHER
- INSTALL & GROUT THE **SAME DAY** – NO RETURN TRIP
- **EASY TO REMOVE** FOR REPAIR
- **CONSISTENT ALIGNMENT & NO LIPPAGE**
- **INSTALLS OVER** MANY EXISTING FLOORING SURFACES
- SIMPLE TEAR-OUT TO **UPDATE**
- PERFECT FOR SECOND STORY FLOORS – **REDUCED SOUND TRANSMISSION**
- **NO ACCLIMATION** REQUIRED*



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



SIMPLICLEAN™

Visit the Why Tile page at www.daltile.com for a complete list of qualifications and exclusions.

*When compared to installing 300 sq ft., 6 x 24 porcelain tile with a three-man crew using typical trade installation practices and tools, and a 3-hour rapid dry mortar cure.
*Does not require acclimation if stored in non-freezing temperatures. See installation instructions for full details.

WOOD LOOK – MATTE FINISH

6 x 36 CLICK FLOOR TILE



TOASTED PECAN
RV76

MAPLEWOOD
RV77

WHITWASH
RV78

FRENCH PRESS
RV80

DRIFTWOOD
RV81

PROVENCE
BROWN RV82

DARK WALNUT
RV83

HARBOR GREY
RV84

6 x 24 CLICK FLOOR TILE



PERSPECTIVE
GREY RV70

GOLDENHURST
RV71

SPICED WALNUT
RV72

MISSION ELM
RV73

TOASTED
BROWN RV74

ANTIQUITY
WHITE RV75

STONE LOOK – MATTE FINISH

12 x 24 CLICK FLOOR TILE



CLIFF STONE
QC02

TOWER WHITE
RV60

GRAPHITE
RV61

HEARTHSTONE
RV62

SAND DOLLAR
RV63


BRUSHED GREY
RV64

SHAKER BEIGE
RV65

LENOX GREY
RV66

MARBLE LOOK – MATTE & POLISHED FINISHES

12 x 24 CLICK FLOOR TILE

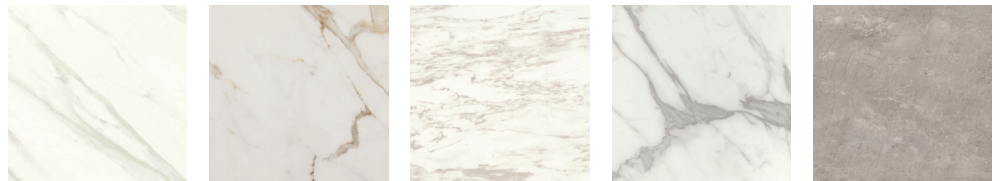

CARRARA WHITE
RV50*

CALACATTA
MARBLE QC01**

ENCHANTING
MARBLE RV52***

CALACATTA
MARVEL RV53***

EXQUISITE GREY
RV51***

* Available in Matte and Polished finishes.
** Available in Polished finish only.
*** Available in Matte finish only.

REAL TILE. REALLY EASY TO INSTALL.

Take out the guess work with these approved accessories!

- 1 **RAPIDPREP™ UNDERLAYMENT+**
THE PERFECT SUPPORT FOR YOUR FLOOR.
- 2 **CLIC-FIT™ INSTALL KIT**
ALL THE TOOLS YOU NEED TO CLICK YOUR TILE TOGETHER.
- 3 **RAPIDGROUT™+**
A FLEXIBLE, SINGLE-COMPONENT GROUT DESIGNED FOR TILE WITH CLICFIT TECHNOLOGY.
* REQUIRED FOR INSTALLATION TO COMPLY WITH WARRANTY.

CONCRETE LOOK – MATTE FINISH

12 x 24 CLICK FLOOR TILE



POWER GREY
RV90

RAPIDGROUT™ SELECTIONS:



ULTRA
WHITE D152

DOVETAIL
D196

METROPOLITAN
D195

COASTAL
GRAY D160

HIGHLAND
PEARL D145

WHISPER
BEIGE D189

SAND
DUNE D197

BRIARWOOD
D199

PEWTER
BROWN D283

GREY
MIST D198



SIZES

			Grout Joint	Thickness	Sq. Ft./ Carton	Pieces/ Carton
	6 x 36 Floor Tile▼	(5-7/8" x 35-3/8") (15.00 cm x 89.80 cm)	1/8"	1/2"	10.15	7
	6 x 24 Floor Tile▼	(6-3/16" x 23-7/8") (15.66 cm x 60.60 cm)	3/16"	7/16"	10.20	10
	12 x 24 Floor Tile*	(11-3/4" x 23-1/2") (29.86 cm x 59.74 cm)	1/8"	1/2"	9.60	5

▼ Wood Look | + Marble, Stone & Concrete Look

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

* Matte finish only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 475 lbs
Scratch Hardness	MOHS	8.0 (Matte) 6.0 (Polished)
Chemical Resistance	C650	Resistant

RevoTile features greater breaking strength and impact resistance than conventional porcelain tile.

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	③ All Residential / Light Commercial
2 All Residential Areas	4 All Residential / Commercial

ACCESSORIES

For best results and warranty compliance, use of approved underlayment and grout are required. Available wherever RevoTile is sold. See installation instructions for more information.



For warranty details, visit daltile.com.



* Tile component only

INSTALLATION – 6 x 24 WOOD LOOK

Pattern Recommendation*	Shade Variation
Floor 6 x 24: 33% Offset / 50% Offset 	High (V3)

* Straight grid installation is not approved for RevoTile.

INSTALLATION – 6 x 36 WOOD LOOK

Pattern Recommendation*	Shade Variation
Floor 6 x 36: 33% Offset 	High (V3) (RV80, RV81, RV82, RV83 & RV84) Random (V4) (RV76, RV77 & RV78)

* Straight grid installation is not approved for RevoTile.

INSTALLATION – 12 x 24 MARBLE, STONE & CONCRETE LOOKS

Pattern Recommendation*	Shade Variation
Floor 12 x 24: 33% Offset / 50% Offset 	High (V3)

* Straight grid installation is not approved for RevoTile.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match actual samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

For more information, visit daltile.com.



All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

* Tile component only

** 12 x 24 and 6 x 36 sizes only



Need help with installation?

For quick tips from our Expert Installation Team
Call 1- 855-572-CLIC (2542)

or

Visit us online at www.Daltile.com/RevoTile

7834 C.F. Hawn Freeway
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2021 Daltile (3/21)