

### EVERCLEAN 6' x 36" WHIRLPOOL

Comfortable bathing design with form-fitted backrest and molded-in armrests.

#### Model# 7236LC (specify color) Whirlpool

- Acrylic with fiberglass reinforcement
- EverClean system\*
- Self-draining pump/motor
- Ten fully adjustable Clean Jets™
  - Two fully adjustable Clean Jets Hi-Flo jets
  - Eight fully adjustable Clean Jets including two in the lumbar area
- Three side-mounted silent air volume controls
- Side-mounted On/Off control
- Complete factory installed and tested whirlpool system
- Pre-leveled tub bottom
- Designed with undermount installation option
- Ledge mounted overflow design for maximum water depth
- E-Z Install™ heater connection system (heater must be ordered separately)
- Must order Deep Soak® Max Drain (sold separately)

\* American Standard whirlpools with EverClean incorporate a patented antimicrobial additive molded directly into the water circulation piping to inhibit the growth of mold and mildew on the pipes.

#### Model# 7236L.002 Bathing Pool Only

#### Model# 7236L.068C Air Bath

- EverClean system\*
- Full body massage with 24 strategically placed air jets
- Variable speed air blower with heater
- Automatic purge with timer

#### Nominal Dimensions:

72" x 36" x 21-1/2"  
(1829 x 914 x 546mm)

#### Compliance Certifications -

#### Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density



#### Components Required:

- Bath Filler\*\*: (specify finish)
- Bath Drain: Deep Soak Max 1599.205.XXX (colors/finishes other than white)  
OR 1599.500.020 (white only)

#### Optional Components:


- Six Foot Removable EverClean Apron: Model 9271.019 (specify color)
- E-Z-Install Whirlpool Heater - EZHEAT-100 (whirlpool only)
- Tile Bead Kit: TILE-BEAD
- Air Jet Cover Kit for Air Bath  
Model: 9810.025 (color-matched)

\*\* See American Standard Faucet Selector

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

**NOTE:** E-Z-Install Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

SEE REVERSE FOR ROUGHING-IN DIMENSIONS  
AND PRODUCT SPECIFICATIONS

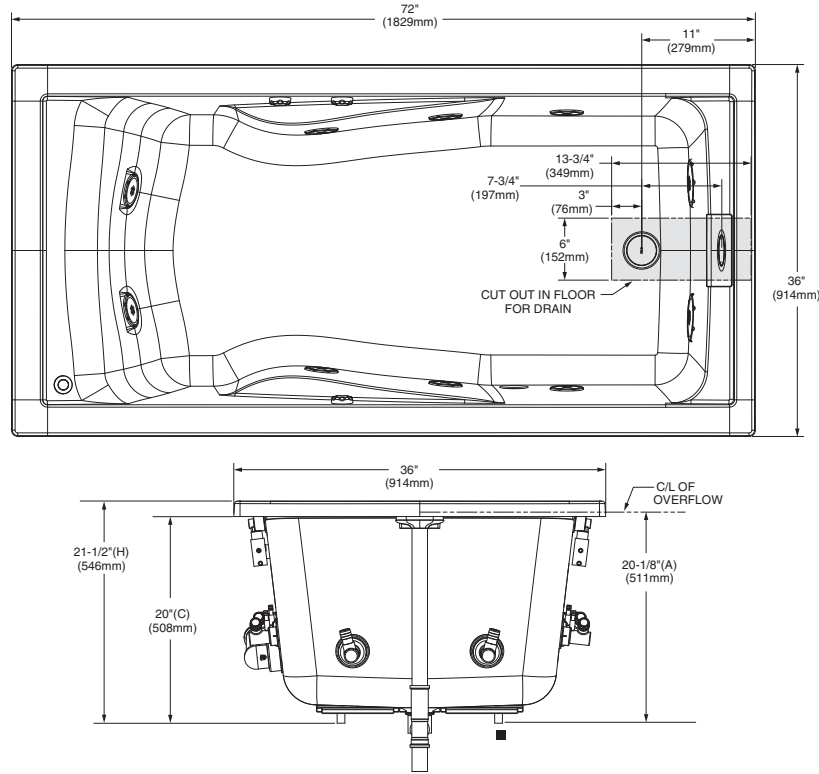

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7.

**GENERAL SPECIFICATIONS FOR 7236LC WHIRLPOOL**

INSTALLED SIZE \_\_\_\_\_ 72 x 36 x 21-1/2 In. (1829 x 914 x 546mm)  
 WEIGHT \_\_\_\_\_ 106 Lbs. (48 Kg.)  
 WEIGHT w/WATER \_\_\_\_\_ 1031 Lbs. (467 Kg.)  
 GAL. TO OVERFLOW \_\_\_\_\_ 111 Gal. (420 L)  
 WHIRLPOOL MIN. OPERATING VOL. \_\_\_\_\_ 53 Gal. (201 L)  
 BATHING WELL AT SUMP \_\_\_\_\_ 53-1/2 x 26-1/4 In. (1359 x 667mm)  
 BATHING WELL AT RIM \_\_\_\_\_ 64-1/2 x 30 In. (1638 x 762mm)  
 WATER DEPTH TO OVERFLOW \_\_\_\_\_ 18-1/2 In. (470mm)  
 FLOOR LOADING \_\_\_\_\_ 57 Lbs./Sq.Ft. (280 Kgs./Sq.m)  
 (PROJECTED AREA)

**WHIRLPOOL ELECTRICAL SPECIFICATIONS**

PUMP \_\_\_\_\_ 2.1 HPR, 14.4 AMPS, 120V.

**GENERAL SPECIFICATIONS FOR 7236L.002 BATHING POOL**

INSTALLED SIZE \_\_\_\_\_ 72 x 36 x 21-1/2 (1829 x 914 x 546mm)  
 WEIGHT \_\_\_\_\_ 91 Lbs. (41 Kg.)  
 WEIGHT w/WATER \_\_\_\_\_ 1016 Lbs. (461 Kg.)  
 GAL. TO OVERFLOW \_\_\_\_\_ 111 Gal. (420 L.)  
 BATHING WELL AT SUMP \_\_\_\_\_ 53-1/2 x 26-1/4 In. (1359 x 667mm)  
 BATHING WELL AT RIM \_\_\_\_\_ 64-1/2 x 30 In. (1638 x 762mm)  
 WATER DEPTH TO OVERFLOW \_\_\_\_\_ 18-1/2 (470mm)  
 FLOOR LOADING \_\_\_\_\_ 56 Lbs./Sq.Ft. (275 Kgs./Sq.m)  
 (PROJECTED AREA)

**AIR BATH ELECTRICAL SPECIFICATIONS**

BLOWER \_\_\_\_\_ 1.0 APR, 10AMPS, 120V

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL, DECK MOUNTED SPOUT AND INTEGRATED BATH FILLER FOR ADDITIONAL INFORMATION.

OPTIONAL 3-WALL TILING BEAD KIT No. TILE-BEAD AND APRON No. 9271.019 MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.