

OVALYN UNIVERSAL ACCESS™ SINK

- Made from vitreous china
- Unglazed rim for under counter mount
- Rear overflow
- Supplied with mounting kit (047194-0070A) and template

9482.000

Nominal Dimensions:


489 x 400mm
(19-1/4" x 15-3/4")

Bowl sizes:

425mm (16-3/4") wide
337mm (13-1/4") front to back
140mm (5-1/2") deep
102mm (4") bowl depth

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series
- 1995 National Building Code, section 3.7 and CAN/CSA-B651-M90 and OBC 3.7.

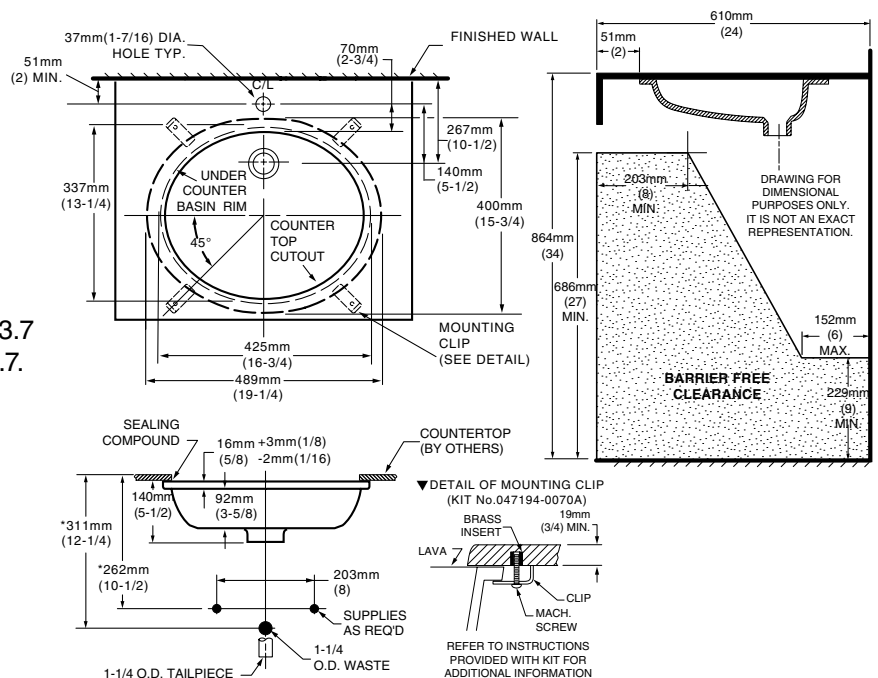

To Be Specified:

- Color: White Bone
 Linen Silver
 Fawn Beige Black
- Faucet*:
- Faucet Finish:
- Supplies:
- 1-1/4" Trap:

* See faucet section for additional models available

For Universal Design Options, top of counter may be mounted at 813mm (32") minimum from finished floor to meet ADA and ANSI A117.1 requirements. A 838mm (33") minimum mounting height is required for Ontario. Check local codes for heights and faucet handles requirements.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 51mm (2") MIN. from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED.

▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH BASIN. FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.