
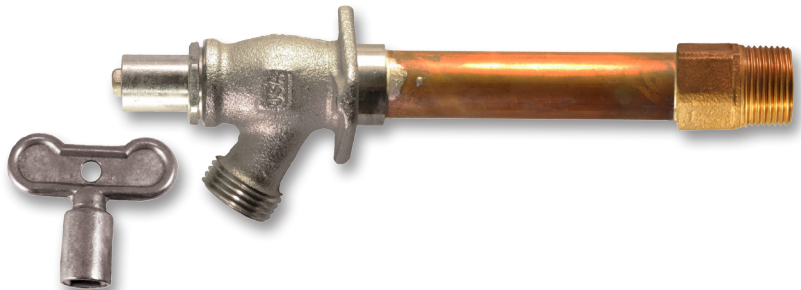


450LF Series Standard Frost-Proof Wall Hydrants

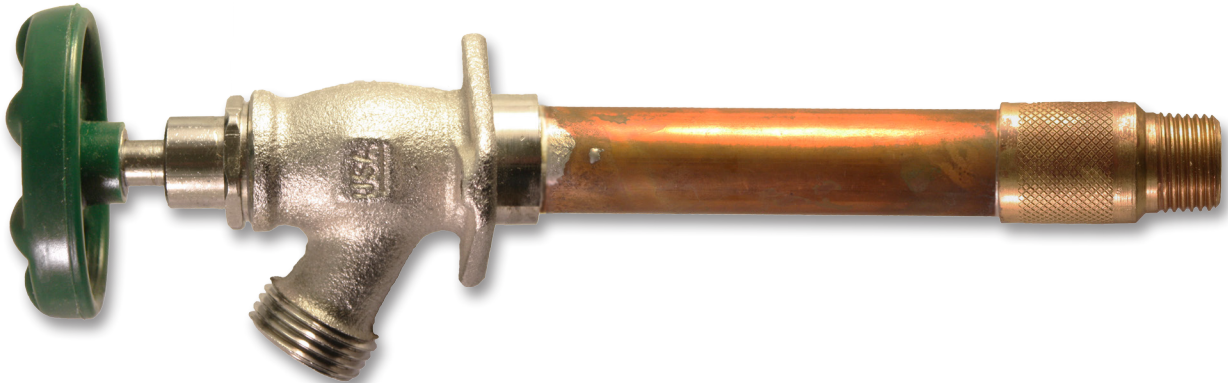

Lead Free Wall Hydrants

Standard Frost-Free design

Features & Benefits

- Heavy duty lead free bronze construction
- NSF/ANSI 372 certified lead free by IAPMO
- Maximum pressure: 125 PSI
- Maximum temperature: 140° F
- Flow rates: 13 GPM at 50 PSI
- 3-year limited warranty
- Available in loose-key models
- Available in 2, 4, 6, 8, 10, 12 & 14 inch lengths





Base Models

451 Series- 3/4" WIRSBO Inlet	452 Series- 1/2" WIRSBO Inlet	455 Series- 1/2" FIP 3/4" MIP Inlets	456 Series- 1/2" MIP & Sweat Inlets	457 Series- 3/4" PEX Inlet	458 Series- 3/4" MIP & Sweat Inlets
# 451-xxQTLF 3/4" WIRSBO style tube inlet x 3/4" hose thread outlet	# 452-xxQTLF 1/2" WIRSBO style tube inlet x 3/4" hose thread outlet	# 455-xxQTLF 1/2" FIP & 3/4" MIP inlets x 3/4" hose thread outlet	# 456-xxQTLF 1/2" MIP & copper sweat inlet x 3/4" hose thread outlet	# 457-xxQTLF 3/4" PEX style tube inlet x 3/4" hose thread outlet	# 458-xxQTLF 3/4" MIP & copper sweat inlet x 3/4" hose thread outlet
459 Series- 1/2" PEX Inlet	Loose Key Option				
# 459-xxQTLF 1/2" PEX style tube inlet x 3/4" hose thread outlet	# 45_xxLKLF Removable loose key lock-shield				

Repair & Replacement Parts

Replacement Oval Handle & Screw	Stem Rebuild Kit
# PK1295 Replacement rubber-coated green oval handle (# 2) & stainless steel screw (# 1)	# PK1000 Replacement bonnet washer (#4), seat washer & screw (#6-7) & handle screw (# 1)
Complete Stem Assembly	
# PK80xx 04, 06, 08, 10, 12, 14 - inch stem assembly (# 3-7)	

