


Cable Runway Pan


- Use to provide continuous support for cables in runway.
- See SB128 for alternate pan positioning.
- Pans can be trimmed to fit in field.
- Material: Aluminum sheet
- Finish___: Brushed Aluminum (AL),
Telco Gray Powder Coat (TG) (one side only),
or Flat Black Powder Coat (FB) (one side only)

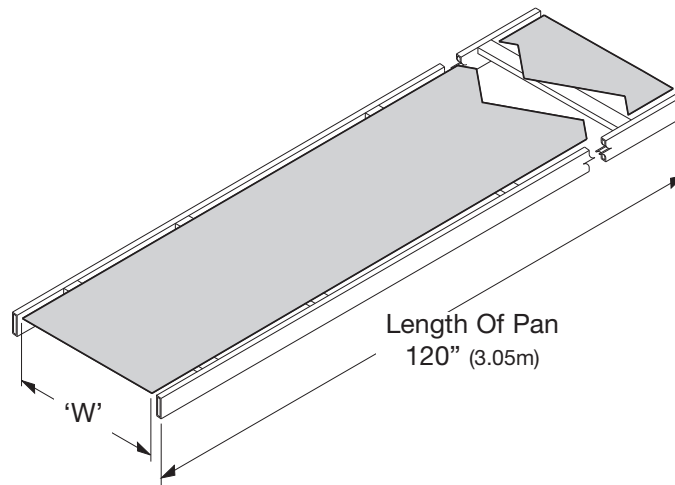

Part Number	Runway Width		'W'		Weight	
	In.	(mm)	In.	(mm)	Lbs.	(kg)
SB1906__	6"	(152)	4 ¹ / ₄ "	(108)	2.0	(0.91)
SB1909__	9"	(228)	7 ¹ / ₄ "	(184)	3.4	(1.54)
SB1912__	12"	(305)	10 ¹ / ₄ "	(260)	4.8	(2.18)
SB1915__	15"	(381)	13 ¹ / ₄ "	(336)	6.2	(2.81)
SB1918__	18"	(457)	16 ¹ / ₄ "	(413)	7.6	(3.45)
SB1920__	20"	(508)	18 ¹ / ₄ "	(463)	8.6	(3.90)
SB1924__	24"	(609)	22 ¹ / ₄ "	(565)	10.5	(4.76)
SB1930__	30"	(762)	28 ¹ / ₄ "	(717)	13.4	(6.08)
SB1936__	36"	(914)	34 ¹ / ₄ "	(870)	16.3	(7.39)

Kydex®† Runway Pan

- Use to provide continuous support for cables in runway.
- Meets UL 94 V-0
- Material: .04" (1mm) thick Kydex®†
- Colors: Gray (G)

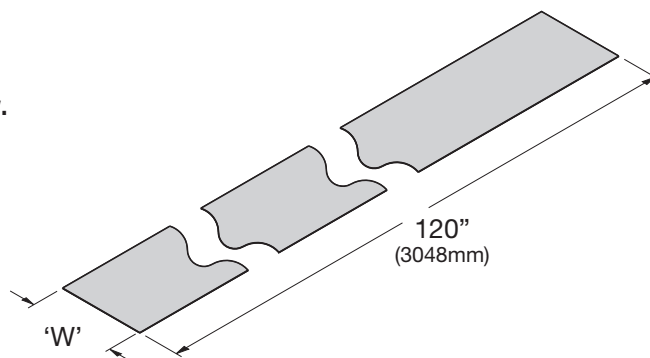


Part Number	Runway Width		'W'		Weight	
	In.	(mm)	In.	(mm)	Lbs.	(kg)
SB1906KG	6"	(152)	4 ¹ / ₄ "	(108)	1.4	(0.63)
SB1909KG	9"	(228)	7 ¹ / ₄ "	(184)	2.1	(0.95)
SB1912KG	12"	(305)	10 ¹ / ₄ "	(260)	2.8	(1.27)
SB1915KG	15"	(381)	13 ¹ / ₄ "	(336)	3.5	(1.59)
SB1918KG	18"	(457)	16 ¹ / ₄ "	(413)	4.2	(1.90)
SB1920KG	20"	(508)	18 ¹ / ₄ "	(463)	4.6	(2.08)
SB1924KG	24"	(609)	22 ¹ / ₄ "	(565)	5.6	(2.54)
SB1936KG	36"	(914)	34 ¹ / ₄ "	(870)	8.4	(3.81)

Pan Support

- Use to suspend cable runway pan from rungs of cable runway.
- Seven (7) pan supports recommended for each length, 119¹/₂" (3.05m), of cable runway.
- SB128 Series is designed for use on cable runways with 1/2" x 1" (13mm x 25mm) rungs.
- SB128U Series is designed for use on cable runways with 3/8" x 1 1/2" (9mm x 38mm) rungs.
- Material: cold finished steel wire
- Finish___: Yellow Zinc (YZ), Telco Gray Powder Coat (TG) or Flat Black Powder Coat (FB)

Part Number		Runway Width		Weight	
SB128 Series	SB128U Series	In.	(mm)	Lbs.	(kg)
SB1286	SB128U6	6"	(152)	0.10	(0.04)
SB1289	SB128U9	9"	(228)	0.12	(0.05)
SB12812	SB128U12	12"	(305)	0.14	(0.06)
SB12815	SB128U15	15"	(381)	0.16	(0.07)
SB12818	SB128U18	18"	(457)	0.19	(0.08)
SB12820	SB128U20	20"	(508)	0.20	(0.09)
SB12824	SB128U24	24"	(609)	0.23	(0.10)
SB12830	SB128U30	30"	(762)	0.27	(0.12)
SB12836	SB128U36	36"	(914)	0.31	(0.14)

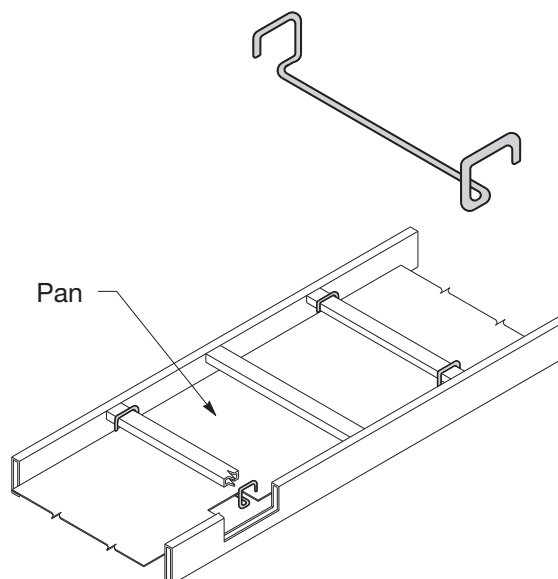

† Mark shown is property of respective owner.