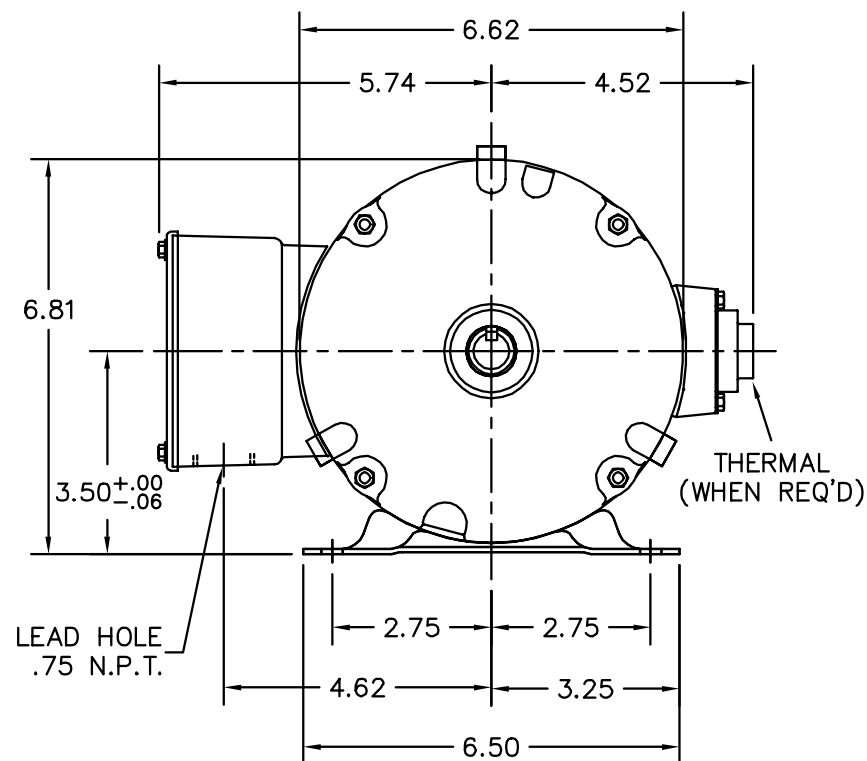
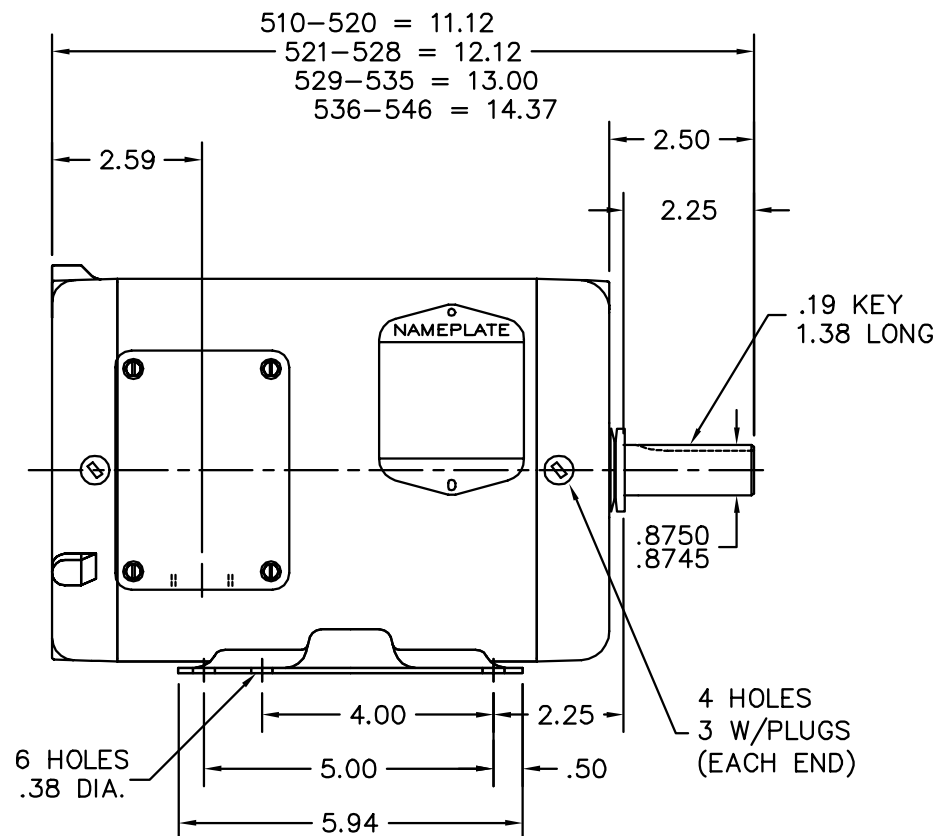


APPLY RED SEALER
 TO HOUSING BEFORE
 PRESSING IN SEAL

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: NEW

REV. LTR: -

VERSION: 00

TDR: 000000721161

FILE: \AAA\00189\373

REVISED: 11:37:54 02/13/2012

MTL: -

BY: ENALEMO

BALDOR

STD HORZ 143-5T TENV 35M WD W/.75 NPT

SH 1 of 1