


ENCLOSURE: DRIPPROOF
MOUNTING: FOOT
DRIVE METHOD: COUPLED OR BELTED

RPMAC VARIABLE SPEED ALTERNATING CURRENT MOTOR RL & URL2570Z

COOLING: FORCE VENTILATED
ACCESSORIES: PROVISIONS FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

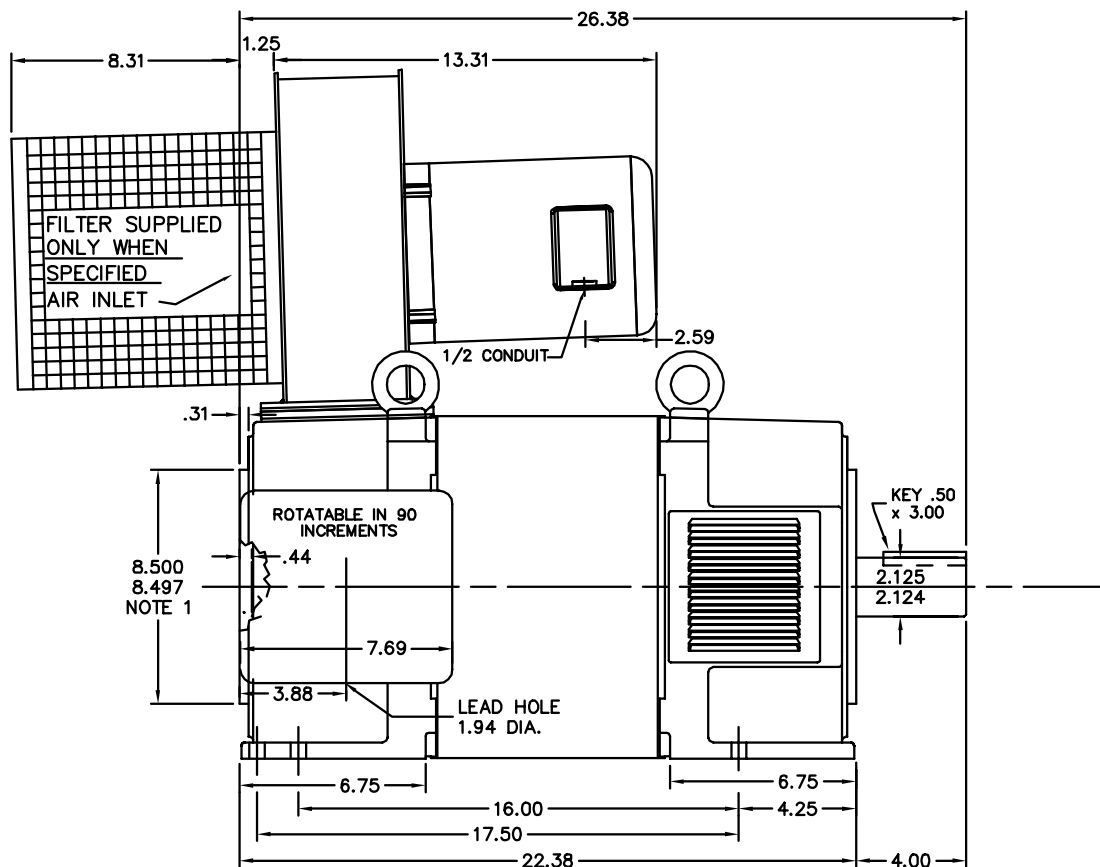

NOTE 1 TACHOMETER MOUNTING
1/2-13 TAP, .88 DEEP, ON A 7.25 DIA. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX. T.I.R.


NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.

TERMINAL BOX MAY BE LOCATED F1 OR F2 IF SPECIFIED
121 AMP STEEL TERMINAL BOX SHOWN
REFER TO 616779-50 FOR SPECIFIC TERMINAL BOX DIMENSIONS

REFER TO 616779-51 FOR SPECIFIC TACHOMETER DIMENSIONS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADDING CORRECT BLOWER MOTOR.	VERSION: 01	TDR: 000000771082
REV. LTR: A	REVISED: 09:27:34 11/28/2012	BY: RGGJGG
FILE: \RGG\00003\278		
MTL: -		

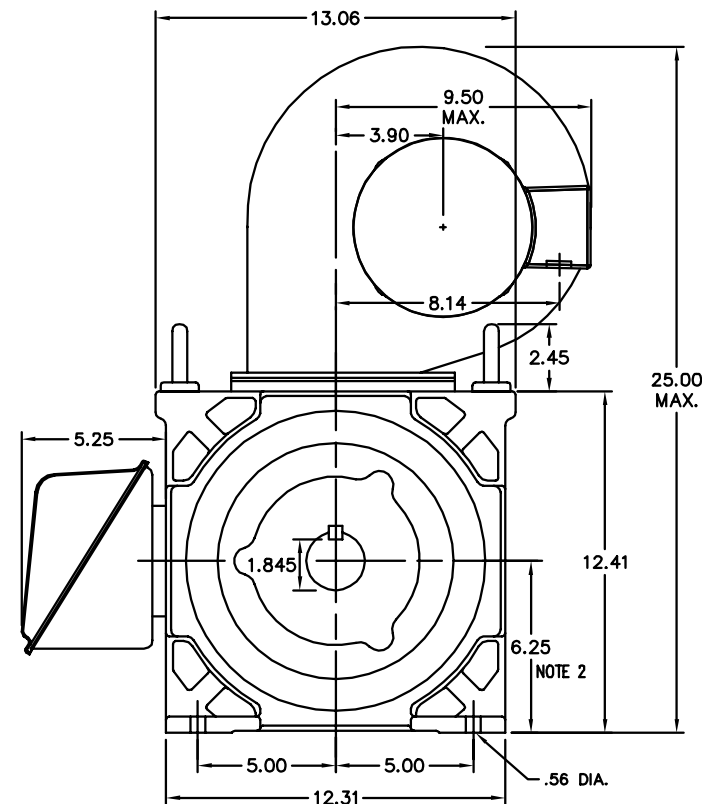

MOTOR WEIGHT 480 LBS. (MAY VARY 15%)

BLOWER ASSEMBLY CAN BE LOCATED TOP or SIDES.
BLOWER & TERMINAL BOX MAY NOT BE LOCATED ON SAME SIDE.

DIMENSIONS ARE IN INCHES SCALE 1:1

BALDOR

DIM SHT RPMAC DPFV RL & URL2570Z PROV FOR TACH

SH 1 of 1