


ENCLOSURE: DRIP PROOF
MOUNTING: FOOT
DRIVE METHOD: COUPLED OR BELTED

RPMAC VARIABLE SPEED ALTERNATING CURRENT MOTOR
RL2898Z/URL2898

COOLING: FORCE VENTILATED
ACCESSORIES: PROVISIONS FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

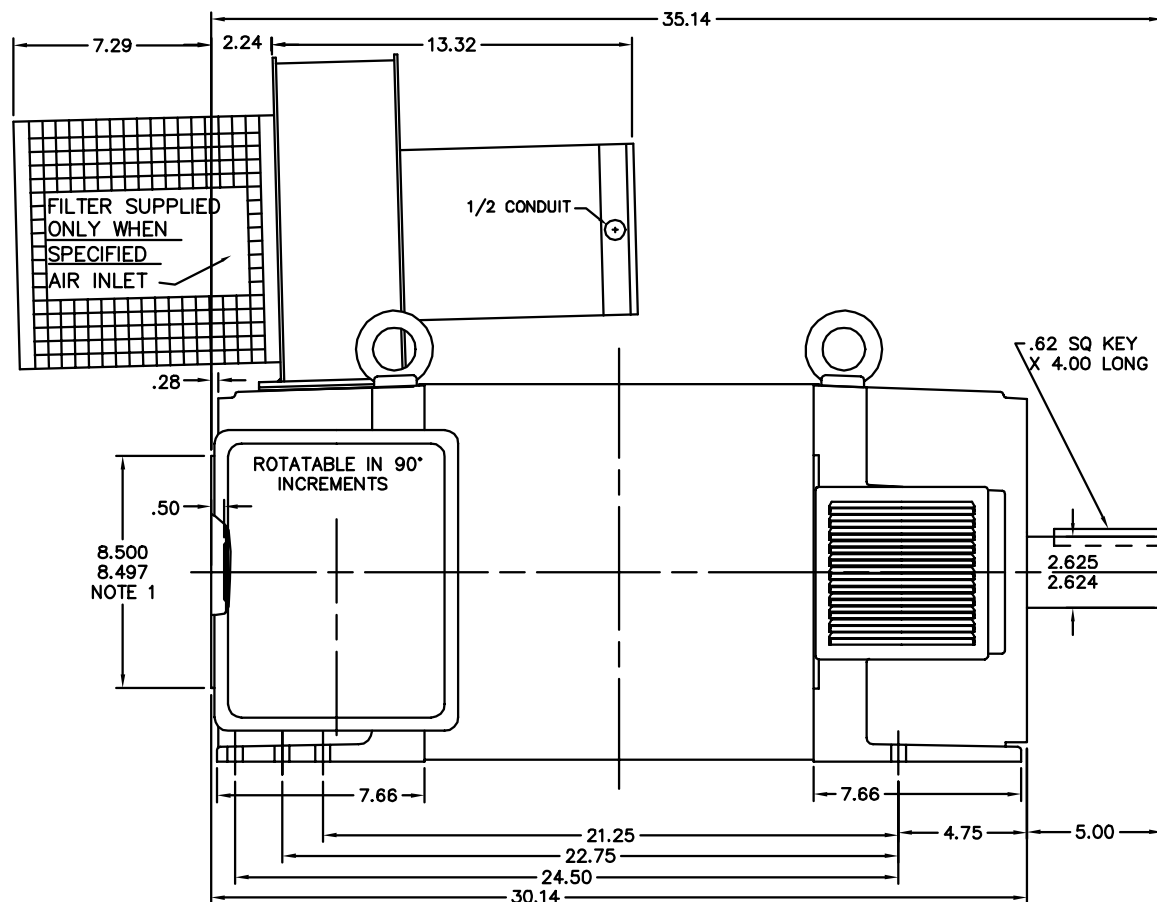


NOTE 1 TACHOMETER MOUNTING
1/2-13 TAP, .88 DEEP, ON A 7.25 DIA. BOLT CIRCLE
FACE RUNOUT AND ECCENTRICITY .004 MAX. T.I.R.

NOTE 2 SHAFT HEIGHT WILL NOT BE EXCEEDED.
SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY
REQUIRED FOR COUPLED OR GEARED MACHINES.

TERMINAL BOX MAY BE LOCATED F1 OR F2 IF SPECIFIED
305 AMP STEEL TERMINAL BOX SHOWN
REFER TO 616779-50 FOR SPECIFIC TERMINAL BOX DIMENSIONS
REFER TO 616779-51 FOR SPECIFIC TACHOMETER DIMENSIONS
MOTOR WEIGHT 930 LBS. (MAY VARY 15%)

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD FRAME URL2898 TO D/S		
REV. LTR: C	VERSION: 03	TDR: 000000737252
FILE: \RGG\00003\848	REVISED: 07:54:08 03/08/2012	BY: RGGWT
MTL: -		

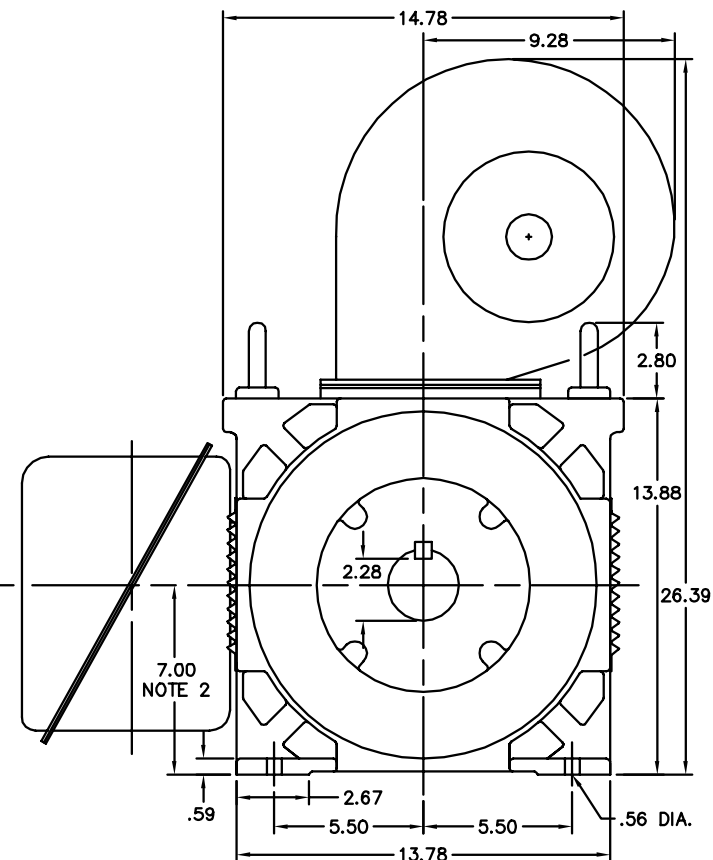

DIMENSIONS ARE IN INCHES SCALE 1:1

BALDOR

DIM SHT RL2898Z RPM AC DPFV PROV FOR TACH FT MTG

SH 1 of 1