


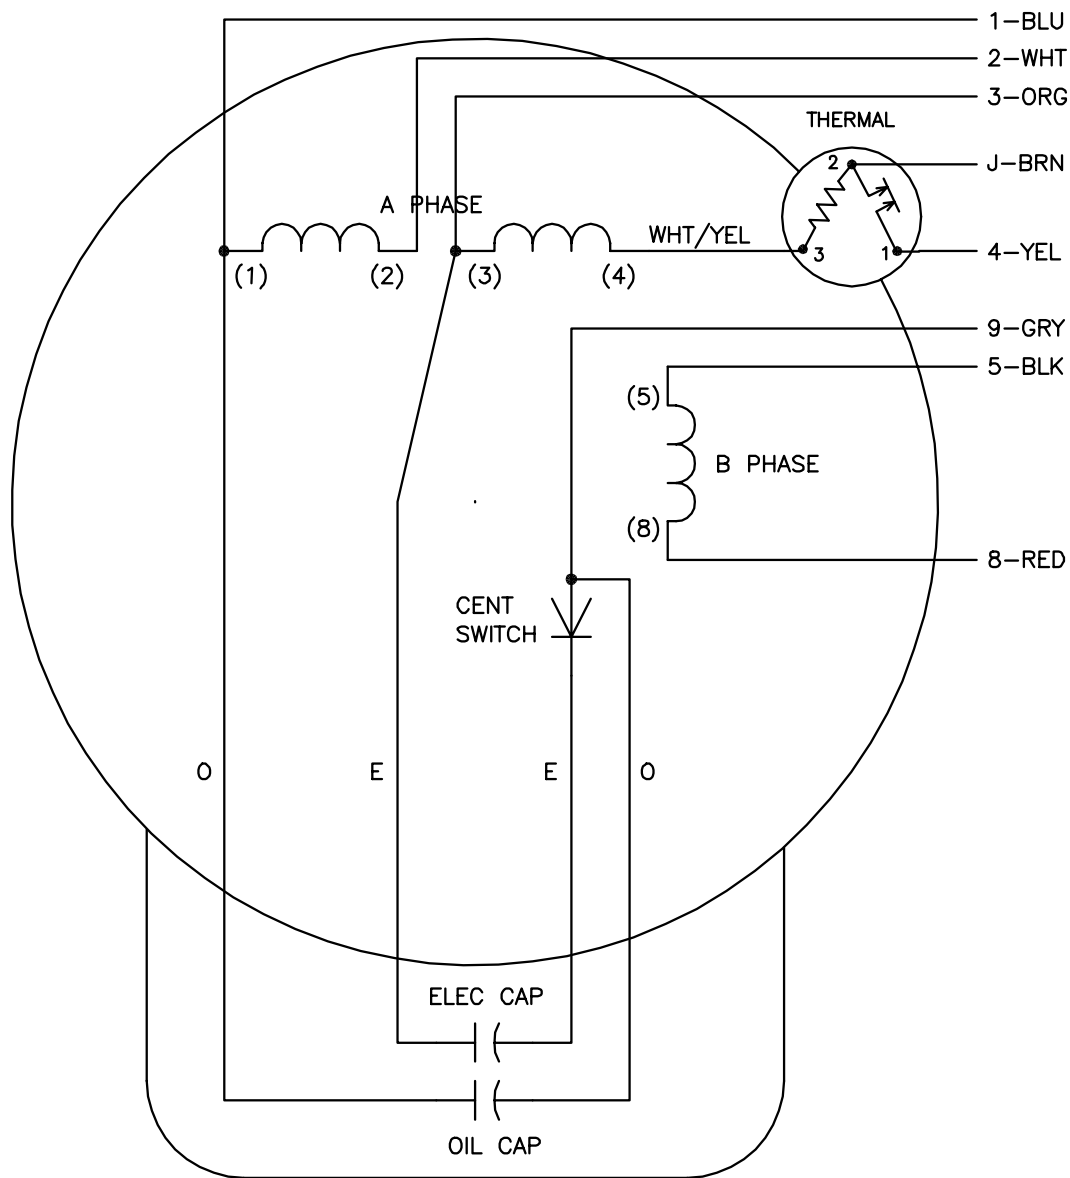

	LINE A	LINE B	JOIN	JOIN	JOIN
HIGH STD	1	4	2,3	8,9	J,5
HIGH OPP	1	4	2,3	5,9	J,8
LOW STD	1,3	4	8,9	2,J,5	—
LOW OPP	1,3	4	5,9	2,J,8	—

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE OPTIONAL THERMAL CONNECTION

REV. LTR: F

VERSION: 01

TDR: 000000373039

BALDOR ELECTRIC Co.

Z0V9100D0

FILE: \AAA\00007\411

REVISED: 10:13:25 08/11/2005

MTL: —

BY: ENJOEPO

TYPE LC, DV, REV, OIL CAP ACR. LINE, THERMAL, 8 LEADS