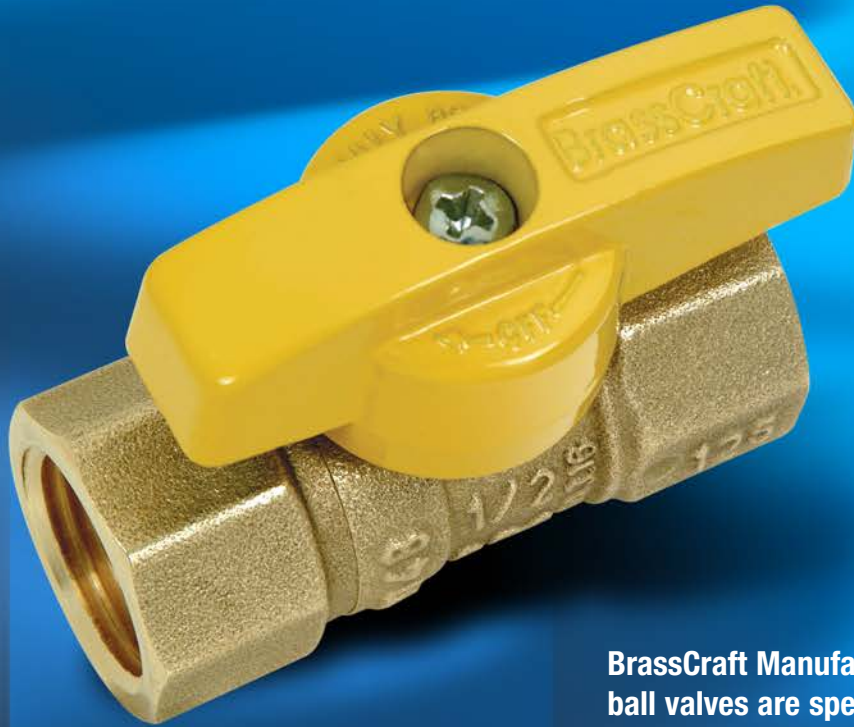


BrassCraft®

Gas Ball Valves

Experience the Difference in Quality,
Performance & Product Innovation



BrassCraft Manufacturing's exclusive line of Italian-made gas ball valves are specially engineered to provide unsurpassed product performance. From the stem to the body to the exclusive handle design, every detail has been master crafted for ease of operation and installation. Each BrassCraft® gas ball valve is manufactured to the industry's highest standards for consistent product quality and superior performance.





Available in a variety of configurations for use with natural, manufactured, mixed, liquefied-petroleum gases, and LP gas-air mixtures.


- **FORGED BRASS BODY**
Eliminates pinhole leaks commonly associated with cast products
- **PTFE SEAT RINGS**
Assures a tight seal and easy on & off operation even after long periods of inactivity
- **BLOW-OUT PROOF STEM**
Assembled from the inside with double o-ring protection to ensure safe, reliable performance
- **1/4-TURN OPERATION**
Provides easy on & off flow control
- **COMFORT-FIT GRIP**
An exclusive integration of the 'T' and lever handle designs
- **LARGE WRENCH FLATS**
Makes installation easier
- **100% LEAK TESTED**
- **CSA CERTIFIED**





For more details, or to place an order, contact your local BrassCraft Mfg. sales or customer service representative.

Part No.	Part Description	Valve Dimensions (IN)				Flow Rate SCFH	Pack Qty	Master Carton Qty	
		*D	H	L	M				
FIP x FIP									
	TBV8	1/2" FIP x 1/2" FIP	0.39	1.45	2.22	1.30	150,000	10	50
	TBV12	3/4" FIP x 3/4" FIP	0.59	1.70	2.63	1.30	400,000	10	50
	TBV16	1" FIP x 1" FIP	0.79	1.83	2.58	1.30	670,000	6	36

Part No.	Part Description	Valve Dimensions (IN)				**Capacity Btu/Hr (Watts)	Pack Qty	Master Carton Qty	
		*D	H	L	M				
FULL PORT - FIP x FIP									
	TBV12F	3/4" FIP x 3/4" FIP, Full Port 425 WOG	0.79	1.79	2.54	1.30	750,000 (219,802)	6	50

FLARE x FIP									
	TBV6-8	3/8" OD Tube x 1/2" FIP	0.28	1.45	2.30	1.30	50,000 (14,654)	10	50
	TBV6F-8	3/8" OD Tube (9/16 -24 Fine Thread) x 1/2" FIP	0.28	1.45	2.30	1.30	50,000 (14,654)	10	50
	TBV8-8	1/2" OD Tube x 1/2" FIP	0.39	1.45	2.41	1.30	100,000 (29,307)	10	50
	TBV10-8	5/8" OD Tube (15/16 -16 Thread) x 1/2" FIP	0.51	1.50	2.50	1.30	100,000 (29,307)	10	60
	TBV10-12	5/8" OD Tube (15/16 -16 Thread) x 3/4" FIP	0.51	1.50	2.50	1.30	130,000 (38,099)	10	60

ANGLE FLARE x FIP									
	TBVA6-8	3/8" OD Tube x 1/2" FIP	0.28	1.70	1.88	1.30	50,000 (14,654)	10	60
	TBVA8-8	1/2" OD Tube x 1/2" FIP	0.39	1.70	1.88	1.30	100,000 (29,307)	10	60
	TBVA10-12	5/8" OD Tube (15/16 -16 Thread) x 3/4" FIP	0.51	1.70	2.00	1.30	130,000 (38,099)	10	60

FLARE x FLARE									
	TBVF6	3/8" OD Tube x 3/8" OD Tube	0.28	1.45	2.46	1.30	50,000 (14,654)	10	50
	TBVF8	1/2" OD Tube x 1/2" OD Tube	0.39	1.45	2.74	1.30	100,000 (29,307)	10	50

* D = Minimum diameter of gas pathway through valve

** Capacity is determined with .64 specific gravity gas with energy content of 1000 Btu/Cubic Foot (37.7 MJ/M3) at .3 inches water column (75 Pa) pressure drop. Capacities stated above are minimum capacities allowed by ANSI Z21.15 – CSA 9.1. BrassCraft® valves meet or exceed these requirements.

Material Specifications:

- Body - Forged brass
- Retainer - Forged brass
- Ball - Chromium-plated brass
- Seats - PTFE
- Stem - Extruded brass
- O-ring - Viton® (high temperature rubber)*
- Handle - Aluminum
- Screw - Zinc-plated steel

* Viton® is a registered trademark of DuPont Dow Elastomers, L.L.C..

Design-Certified & Manufactured

In Accordance With:

- ANSI Z21.15 – CSA 9.1
- CGA CR91-002
- ANSI / ASME B16.44

Working Pressure /

Operating Temperature

- 1/2 PSI (32°F to 125°F)
- 5 PSI (-40°F to 125°F)
- 5 PSI (32°F to 125°F)

Committed to Quality, Driven by Innovation.



Scan for more information

BrassCraft Manufacturing Co.

39600 Orchard Hill Place
Novi, Michigan 48375-5331
TOLL-FREE: (877) 272-7755
FAX: (248) 305-6011

350 South Edgeware Road
St. Thomas, Ontario Canada N4P 4C4
TOLL-FREE: (800) 265-4322
FAX: (800) 567-9100