




**LXEN**



**LXEM**

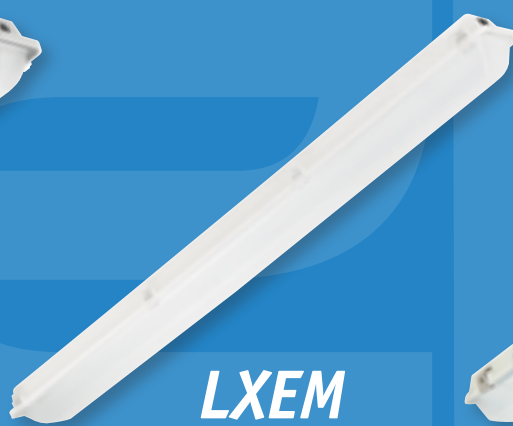

**LXEW**

## XE Family LED Enclosed & Gasketed Luminaires

*A full family of LED linear enclosed and gasketed luminaires for rough service applications*

	LXEN	LXEM	LXEW
	Narrow 4' housing fits easily into confined spaces	Mid-size and mainstream, offering the widest selection of options	An enclosed highbay/lowbay for demanding areas
Width	4"	6 <sup>7</sup> / <sub>8</sub> "	15"
Available Lengths	4'	2', 4', 8'	4'
IP65	✓	✓	✓
IP66 with standard latches	✓	✓	✓
IP67	✓	4', 8'	✓
Wet Label	✓	✓	✓
F1 Weatherability (UV resistance)	✓	✓	✓
UL Sanitation to NSF Standards	✓	✓	✓
Lumen Packages	2,000 – 4,300	3,150– 22,473	11,079 – 38,228
Fluorescent Replacement	1-T8, 2-T8, 1-T5HO	2-T8, 3-T8, 4-T8, 2-T5HO, 4-T5HO	4T-8, 6-T8, 8-T8, 4-T5HO, 6-T5HO, 8-T5HO

LXEN	MODEL	SIZE	COLOR TEMP	SHIELDING	DRIVER	VOLTAGE	OPTIONS
LXEN	LED Narrow Enclosed and Gasketed	4 4'	30 3000K 35 3500K 40 4000K 50 5000K	RFA Ribbed Frosted Acrylic	E Fixed Output ED 0-10V Dimming	U 120V- 277V	SSL Stainless Steel Tamper Resistant Ready Latches TP Tamper Proof Latches F3C15W 3 Wire 15' Wet Cord SWH Single Wet Hub 1/2" NPT Hub DWH Dual Wet Hub 1/2" NPT Hub HT Elevated Ambient to 40°C
LUMEN OUTPUT				LXEN PRODUCT AVAILABILITY			
XW Extra Low Watt LW Low Watt				Length	XW	LW	Efficacy Up To
				4'	2,000 - 2,200	3,800 - 4,300	122
Nominal lumen range represents 3000K through 5000K. Lumens vary according to color temperatures and other factors. See specific photometric test(s).							
Mounting Accessories available. See submittal sheet for details.							

LXEM																											
MODEL		SIZE		COLOR TEMP				SHIELDING		DRIVER		VOLTAGE		OPTIONS													
LXEM	LED Enclosed & Gasketed	2	2' 1,2,3,4	30	3000K			RFA	Ribbed Frosted Acrylic	E	Fixed Output	U	120V- 277V	GLR	Fast Blow Fuse												
		4	4'	35	3500K					ESD	Step Dimming	347	347V	SSL	Stainless Steel Tamper Resistant Ready Latches												
		8	8'	40	4000K			RA	Ribbed Clear Acrylic	ED	0-10V Dimming			TP	Tamper Proof Latches												
				50	5000K			DFA	Deep Frosted Acrylic	ED1	0-10V 1% Dimming <sup>6</sup>			ELL14	Emergency Battery Pack Installed, 1400 Lumens <sup>3,7</sup>												
								DCA	Deep Clear Acrylic																		
								RFP	Ribbed Frosted Polycarbonate <sup>5</sup>					F3C8W	3 Wire 8' Wet Cord												
								RP	Ribbed Clear Polycarbonate <sup>5</sup>					F3C15W	3 Wire 15' Wet Cord												
ACCESSORIES (ORDER SEPARATELY)				LUMEN OUTPUT				SENSOR KITS (Order Separately) All sensor kits include Occupancy & Daylight. Daylight activation requires setting of dip-switches on site.																			
XEHC Chain Hanger Kit (Includes 14" Chain)				VW Very Low Watt																							
XE45MB 45° Mounting Bracket <sup>10</sup>				LW Low Watt																							
XE45MBSS 45° Stainless Steel Mounting Bracket <sup>10</sup>				ML Medium Lumen				120V/ 277V																			
				HL High Lumen																							
				VL Very High Lumen																							
				XL Xtra High Lumen <sup>2</sup>																							

<sup>1</sup> VL and XL not available in 2' size.

<sup>2</sup> Not available with battery pack.

<sup>3</sup> Not available with XL lumen package.

<sup>4</sup> Not available with VL lumen package.

<sup>5</sup> 2' and 4' only. 8' not available.

<sup>6</sup> See table for availability

<sup>7</sup> Not available in 347V

<sup>8</sup> Requires 3/8" OD threaded rod by others.

<sup>9</sup> Registered trademark of Daintree Networks, used by permission.

<sup>10</sup> 2 required for 8' fixture

LXEM PRODUCT AVAILABILITY						
Length	VW	LW	ML	HL	VL	XL
2'	2,145 - 2,708	2,738 - 3,529	3,862 - 4,921	4,254 - 5,416	-	-
4'	2,802 - 3,433	3,726 - 4,922	4,533 - 5,646	5,449 - 6,763	7,086 - 8,415	9,059 - 11,237
8'	6,078 - 6,866	8,095 - 9,276	9,844 - 11,293	11,851 - 13,525	14,747 - 16,830	19,558 - 22,473
Lumens vary according to color temperatures and other factors. See specific photometric test(s).						

LXEW		4	-		-		-		-		
MODEL		SIZE	LUMEN OUTPUT			LENS		DRIVER		OPTIONS	
LXEW	Industrial Enclosed & Gasketed LED High Bay	4 4'	L	Low Watt	FA	Frost Impact Resistant Acrylic (std.)	E	Fixed Output	GLR	Fast Blow Fuse	
			M	Medium Lumen			ED	0-10V Dimming	SSL	Stainless Steel Tamper Resistant Ready Latches	
			MH	Medium High Lumen	CA	Clear Impact Resistant Acrylic			TP	Tamper Proof Latches	
			H	High Lumen					ELL14	Emergency Battery Pack Installed, 1400 Lumens <sup>2,3</sup>	
			HV	High Very High Lumen	CP	Clear UV Stabilized Polycarbonate			F3C8W	3 Wire 8' Wet Cord	
			V	Very High Lumen					F3C15W	3 Wire 15' Wet Cord	
			X	Extra High Lumen					F4C8W	4 Wire 8' Wet Cord	
									F4C15W	4 Wire 15' Wet Cord	
									F5C8W	5 Wire 8' Wet Cord	
									F5C15W	5 Wire 15' Wet Cord	
									F6C6W	6 Wire 6' Wet Cord	
									SWH	Single Wet Hub ½" NPT Hub	
									DWH	Dual Wet Hub ½" NPT Hub	
ACCESSORIES (ORDER SEPARATELY)											
LHVQM5		Aircraft Cable, 5' (Pair)									
LHVQM10		Aircraft Cable, 10' (Pair)									
XEWMHSS		Mounting Strap Hardware Kit, Stainless Steel									
XEWSBZN		Rigid Surface Mounting Bracket Kit, Zinc Plate									
XEWSBSS		Rigid Surface Mounting Bracket Kit, Stainless Steel									
XEWSBSS		Surface Mounting Bracket Kit, Stainless Steel									
Lumens vary according to color temperatures and other factors. See specific photometric test(s).											
LXEW PRODUCT AVAILABILITY											
Length	L	M	MH	H	HV	V	X				
4'	11,079 - 12,495	15,349 - 16,539	16,580 - 18,689	20,714 - 22,321	23,805 - 25,651	29,040 - 32,557	35,357 - 38,099				