NOMENCLATURE





How To Order

There are two ways to specify DODGE Bearings. Most of the product offerings have part numbers with listings shown throughout this catalog. Use of part numbers ensures accurate order processing.

When part numbers are not shown, the product may be specified by description or part name. This method is used when ordering units that include modifications or options. To order by description, use the nomenclature key shown on this page and add any special instructions to the end of the description for options not covered by the nomenclature.

DODGE Spherical Bearings are factory adjusted and pre-lubricated. For applications where extreme ambient temperatures, high speeds, or high loads are expected, a variety of specialty lubricants are available. Standard lubricant provided is Mobil Grease XHP 222, a lithium complex based grease. High temperature greases available upon request. Other special lubricants are also available upon request. Special lubricant options usually involve set-up charges, minimum quantities and list price premiums. To order, specify type of lubricant required at the end of the product name or after the standard part number.

Example: Grease 071792 or 071650 except with Mobil HTS #2 grease

or

SP2BIP108R except with Mobil Grease HTS #2 grease


For applications requiring modifications not listed, we encourage you to contact our Application Engineering Department for Bearings at 864-284-5700.

PAGE B14-2 PAGE B14-5 PAGE B14-14 PAGE B14-30	FEATURES/BENEFITS	SPECIFICATIONS	SELECTION	DIMENSIONS







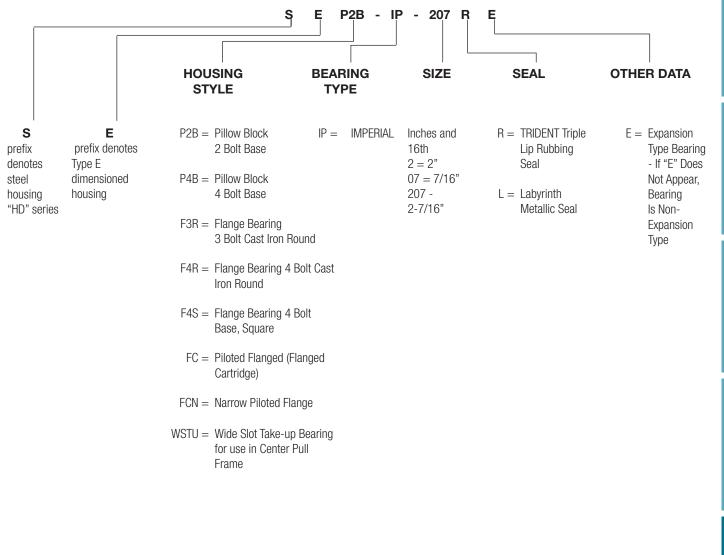

UNISPHERE II

FEATURES/BENEFITS	SPECIFICATIONS	SELECTION	DIMENSIONS
PAGE B14-2	PAGE B14-5	PAGE B14-14	PAGE B14-30