



SPECIFICATION



No. 60

for 3/4" Pitch Single Strand Chain

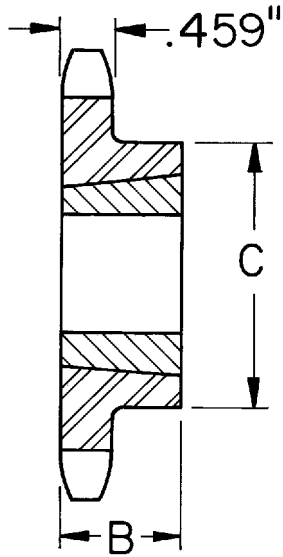

TYPE BTL

TAPER-LOCK								
No. of Teeth	Spkt. O.D.	Description ★	Part No.	Spkt. Wt. w/o Bush.	C Spkt. Hub Dia.	Bore Range		B Lgth. Thru Bore
						Min.	Max.	
11	3.005	60BTL11H-1008	100562	.6	1.81	1/2	1	.88
12	3.249	60BTL12H-1008	100563	.7	1.81			
13	3.493	60BTL13H-1210	100564◆	1.1	2.47	1/2	1-1/4	1.0
14	3.736	60BTL14H-1210	100565	1.2	2.47			
15	3.978	60BTL15H-1610	100566◆	1.4	2.94	1/2	1-11/16	1.0
16	4.220	60BTL16H-1610	100567	1.9	2.94			
17	4.462	60BTL17H-1610	100568	2.0	3.25			
18	4.703	60BTL18H-1610	100569	2.2	3.25			
19	4.945	60BTL19H-1610	100570	2.4	3.25			
20	5.186	60BTL20H-2012	100571	2.5	3.56			
21	5.426	60BTL21H-2012	100572	2.9				
22	5.666	60BTL22H-2012	100573	3.0				
23	5.907	60BTL23H-2012	100574	3.2				
24	6.147	60BTL24H-2012	100575	3.2				
25	6.387	60BTL25H-2012	100576	3.8				
26	6.627	60BTL26-2012	100577	4.1				
27	6.867	60BTL27H-2012	100676	4.2				
28	7.106	60BTL28-2012	100578	4.2				
29	7.346	60BTL29H-2012	104725	4.9				
30	7.586	60BTL30-2012	100579	5.5				
31	7.826	60BTL31-2012	104726	5.8				
32	8.065	60BTL32H-2012	100580	6.0	4.25	1/2	2-11/16	1.75
33	8.305	60BTL33H-2012	104727	6.3				
34	8.544	60BTL34-2012	104728	6.8				
35	8.783	60BTL35-2012	100581	7.0				
36	9.023	60BTL36H-2012	100582	7.0				
37	9.262	60BTL37-2012	104729	7.5				
38	9.501	60BTL38-2012	104730	8.0				
39	9.740	60BTL39-2012	104731	8.3				
40	9.980	60BTL40H-2012	100583	8.7	4.25	1/2	2-11/16	1.75
41	10.219	60BTL41-2012	104732	9.2				
42	10.458	60BTL42-2012	100584	9.7				
45	11.176	60BTL45-2012	100585	10.7				
47	11.654	60BTL47-2012	104733	12.8				
48	11.893	60BTL48-2012	100586	13.5				
50	12.371	60BTL50-2517	104734	15.4				
54	13.327	60BTL54-2517	100587	17.8				
56	13.805	60BTL56-2517	104735	19.5				
60	14.761	60BTL60-2517	100588	20.7				
70	17.150	60BTL70-2517	100589	30.0	4.25	1/2	2-11/16	1.75
72	17.628	60BTL72-2517	100590	31.6				
80	19.539	60BTL80-2517	100591	34.7				
84	20.495	60BTL84-2517	100592	44.7				

- ◆ Hub grooved for chain clearance.
- ★ "H" suffix indicates Hardened Teeth.

TAPER-LOCK SPROCKETS-Large Bore Series								
No. Teeth	Spkt. O.D.	Description ★	Part No.	Wt.	Hub Dia. C	Bore Range		B Dim.
						Min.	Max.	
21	5.426	60BTL21HL-2517	100696	3.4	4.25	1/2	2-11/16	1.75
27	6.867	60BTL27L-2517	100458	4.8	4.25	1/2	2-11/16	1.75
28	7.106	60BTL28L-2517	100459	4.8	4.25	1/2	2-11/16	1.75
30	7.756	60BTL30L-2517	100460	5.9	4.25	1/2	2-11/16	1.75
35	8.783	60BTL35L-2517	100461	7.5	4.25	1/2	2-11/16	1.75
36	9.023	60BTL36L-2517	100462	7.5	4.25	1/2	2-11/16	1.75
39	9.740	60BTL39L-2517	104598	8.8	4.25	1/2	2-11/16	1.75
40	9.980	60BTL40L-2517	100463	9.2	4.25	1/2	2-11/16	1.75

- ★ "H" suffix indicates Hardened Teeth.

FEATURES/BENEFITS PAGE PT12-2	SELECTION PAGES PT12-28 - PT12-39	RELATED PRODUCTS PAGES PT12-40 - PT12-42	ENGINEERING/TECHNICAL PAGES PT12-43 -PT12-46
----------------------------------	--------------------------------------	---	---