

► Model SST-MV

Electronic Siren



Model SST-MV is an economical electronic siren capable of producing one of four high decibel tone outputs from the same unit by featuring internal amplification and tone circuitry.

The Type 3R housing is molded from impact-resistant ASA (acrylic styrene acrylonitrile) plastic, making it resistant to ultra-violet light and ideal for indoor or outdoor use.

The Model SST-MV can be used as a stand-alone, high output, audible warning device in any application where voice paging is not required. Typical applications include emergency warning, start and dismissal, fire alarm, general alarm and evacuation.


FEATURES

- Multi-voltage design accepts 24VDC and 120/240VAC
- Produces one of four tones – wail, yelp, horn and temporal slow whoop
- Produces 107-111 dBa @ 10' (117-121 dBa @ 1m)
- Omni-directional swivel mount
- Indoor and outdoor use
- Type 3R enclosure (with WB backbox)
- UL and cUL Listed

MODEL	VOLTAGE	OPERATING CURRENT
SST-MV	24VDC	600 mA
	120VAC	210 mA
	240VAC	120 mA

TONE	DECIBELS	
	10'	1M
Wail	109.5	119.5
Yelp	111.0	121.0
Horn	107.0	117.0
Temporal Slow Whoop	111.0	121.0

Electronic Siren (SST-MV)

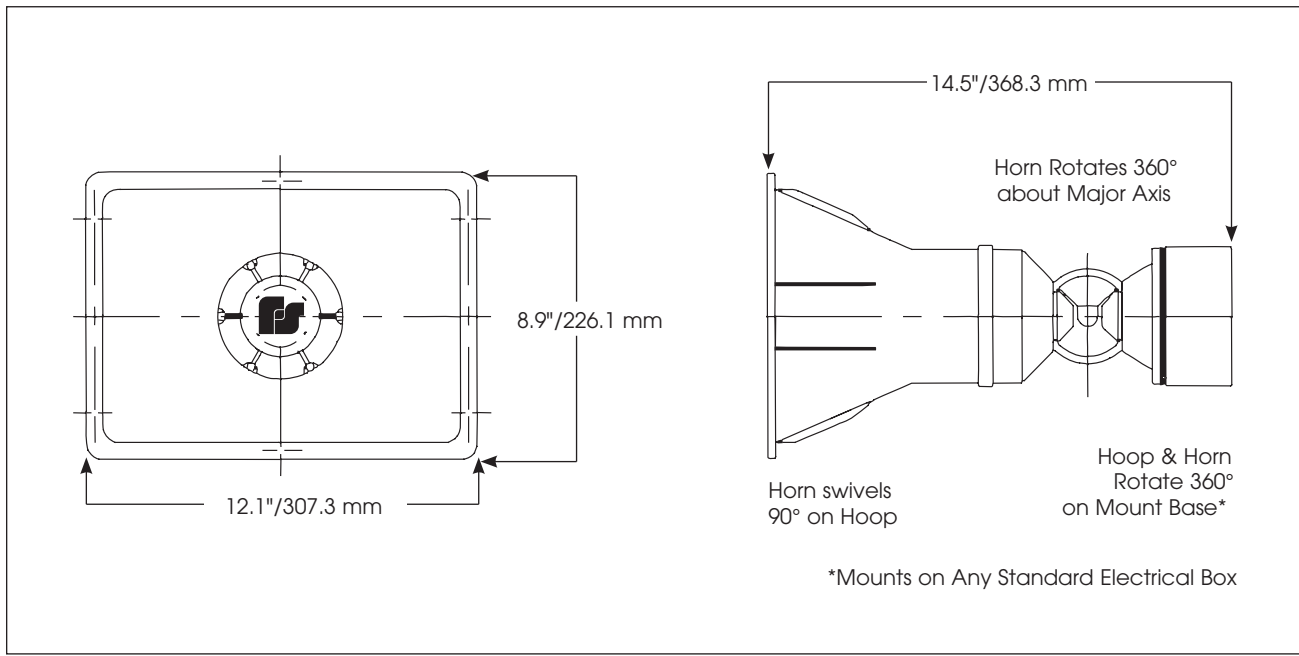

SPECIFICATIONS

Operating Temperature:	-31°F to 151°F	-35°C to 66°C
Maximum Contact Resistance		1000 Ohms
Shipping Weight:	5.2 lbs	2.4 kg
Net Weight:	4.4 lbs	2.0 kg
Height:	14.5"	368.3 mm
Width:	12.1"	307.3 mm
Depth:	8.9"	226.1 mm

HOW TO ORDER

Specify Model:
SST-MV – Siren, electronic, multi-voltage

OPTIONAL ACCESSORIES

Description	Part Number
Weatherproof Backbox	WB

REPLACEMENT PARTS

Description	Part Number
Connector, 4-Position	K140340B
Adapter (Gray)	K8476121A-04
PC Board Assembly	K2001177D-01
Gasket	K8476122A
Speaker Assembly	K8504002A