


### Standard Construction Features

Belt Type: Micro-V  
 Core Material: Oil & Heat Resistant (chloroprene)  
 Cord/Tensile: Polyester

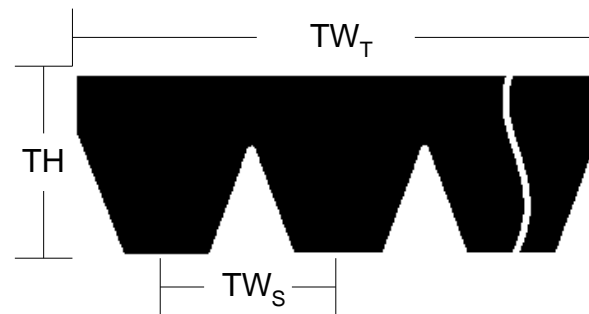

### Belt Section


Cross Section	Effective Length (in)	TW <sub>S</sub> (in)	TH (in)	TW <sub>T</sub> (in)	Strands
M - Industrial	131.00 +0.50 -1.10	3/8	1/2	3 4/5	10

### Measuring Information

\* T (lb) is per belt/rib/strand

Y (in)	T* (lb)	G min (in)	W (in)	Angle (°)	O.D. (in)	O.C. (in)	Max Ride (in)	S (in)
50.500 +0.250 -0.550	100	0.393		40	9.549	30.000	NA	0.37

Reference RMA IP-26 M Section for the industry standard governing this belt.

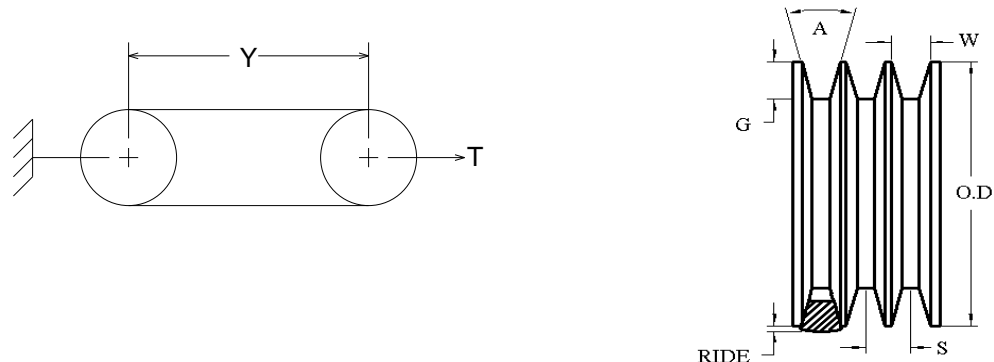

The length shall be measured by placing the belts on two sheaves of equal diameters that have been grooved in accordance with standard specifications and rotated at least three complete turns with the specified tension so that each strand receives half the total tension. The length will be that length obtained by adding the Reference Circumference of one sheave at dimension 'W' to twice the center distance (dimension 'Y').



**DesignView™**  
 Version 1.0 -  
 Belt Information Sheet

Created 22 Jun 2017 by Gates

Created for  
**Micro-V - M - Industrial**

Gates Product Number  
**9174-13110**

Customer Part Number  
**1310M10**