



The following excerpt are pages from the North American Product Technical Guide, Volume 2: Anchor Fastening, Edition 17.

Please refer to the publication in its entirety for complete details on this product including data development, product specifications, general suitability, installation, corrosion and spacing and edge distance guidelines.

US: <http://submittals.us.hilti.com/PTGVol2/>

CA: <http://submittals.us.hilti.com/PTGVol2CA/>

To consult directly with a team member regarding our anchor fastening products, contact Hilti's team of technical support specialists between the hours of 7:00am – 6:00pm CST.

US: 877-749-6337 or [HNATechnicalServices@hilti.com](mailto:HNATechnicalServices@hilti.com)

CA: 1-800-363-4458, ext. 6 or [CATechnicalServices@hilti.com](mailto:CATechnicalServices@hilti.com)

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

### 3.3.6.1 Product description

KWIK HUS-EZ (KH-EZ) anchors are comprised of a body with hex washer head. The anchor is manufactured from carbon steel and is heat treated. It has a minimum 0.0003 inch (8 µm) zinc coating in accordance with DIN EN ISO 4042. The KWIK HUS-EZ (KH-EZ) system is available in a variety of lengths with diameters of 1/4-, 3/8-, 1/2-, 5/8- and 3/4-in. The hex head is larger than the diameter of the anchor and is formed with serrations on the underside. The anchor body is formed with threads running most of the length of the anchor body. The anchor is installed in a predrilled hole with a powered impact wrench or torque wrench. The anchor threads cut into the concrete on the sides of the hole and interlock with the base material during installation. Applicable base materials include normal-weight concrete, structural lightweight concrete, lightweight concrete over metal deck, and grout-filled concrete masonry.

#### Guide specifications

Screw anchors shall be KWIK HUS-EZ as supplied by Hilti, Inc. Anchors shall be manufactured from heat treated carbon steel material, zinc plated to a minimum thickness of 8 µm. Anchor head shall display name of manufacturer, product name, diameter and length. Anchors shall be installed using a drill bit of same nominal diameter as anchor.

#### Product features

- Suitable for seismic and nonseismic loads.
- Quick and easy to install.
- Length and diameter identification clearly stamped on head facilitates quality control and inspection after installation.
- Through fixture installation improves productivity and accurate installation.
- Thread design enables quality setting and exceptional load values in wide variety of base material strengths.
- Anchor is fully removable
- Anchor size is same as drill bit size.
- Suitable for reduced edge distances and spacing.

### 3.3.6.2 Material specifications

Hilti KWIK HUS-EZ anchors are manufactured from carbon steel. The anchors are bright zinc plated to a minimum thickness of 8 µm.

### 3.3.6.3 Technical data

#### 3.3.6.3.1 ACI 318-14 Chapter 17 design

The technical data contained in this section are Hilti Simplified Design Tables. The load values were developed using the Strength Design parameters and variables of ESR-3027 and the equations within ACI 318-14 Chapter 17. For a detailed explanation of the Hilti Simplified Design Method, refer to section 3.1.8. Data tables from ESR-3027 are not contained in this section, but can be found on [www.icc-es.org](http://www.icc-es.org) or at [www.hilti.com](http://www.hilti.com).

3.3.6.1	Product description
3.3.6.2	Material specifications
3.3.6.3	Technical data
3.3.6.4	Installation instructions
3.3.6.5	Ordering information



3.3.6

#### Listings/Approvals

**ICC-ES (International Code Council)**  
 ESR-3027  
 Cracked and Uncracked Concrete  
 ESR-3056  
 Grout-filled concrete masonry

**City of Los Angeles**  
 Research Report No. 25897



#### Independent code evaluation

IBC® / IRC® 2015
IBC® / IRC® 2012
IBC® / IRC® 2009
IBC® / IRC® 2006
IBC® / IRC® 2003


### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

Table 1 - Hilti KWIK HUS-EZ specifications<sup>1</sup>

Setting information	Symbol	Units	Nominal anchor diameter											
			1/4		3/8			1/2			5/8		3/4	
Nominal bit diameter	$d_{bit}$		1/4		3/8			1/2			5/8		3/4	
Minimum nominal embedment	$h_{nom}$	in.	1-5/8	2-1/2	1-5/8	2-1/2	3-1/4	2-1/4	3	4-1/4	3-1/4	5	4	6-1/4
Minimum effective embedment	$h_{ef}$	in.	1.18	1.92	1.11	1.86	2.50	1.50	2.16	3.22	2.39	3.88	2.92	4.84
Minimum hole depth	$h_o$	in.	2	2-7/8	1-7/8	2-3/4	3-1/2	2-5/8	3-3/8	4-5/8	3-5/8	5-3/8	4-4/8	6-5/8
Fixture hole diameter	$d_h$	in.	3/8		1/2			5/8			3/4		7/8	
Anchor Length = $h_{nom} + t$	$\ell$		See ordering information											
Installation torque concrete	$T_{inst}$	ft-lb (Nm)	18 (24)		19 (26)	40 (54)		45 (61)			85 (115)		115 (155)	
Maximum impact wrench torque rating concrete <sup>2</sup>	$T_{impact,max}$	ft-lb (Nm)	114 (154)	137 (185)	114 (154)	450 (608)		137 (185)	450 (608)		450 (608)		450 (608)	
Installation torque masonry	$T_{inst}$	ft-lb (Nm)	21 (28)		22 (30)			34 (46)			38 (52)		70 (95)	
Maximum impact wrench torque rating masonry <sup>2,3</sup>	$T_{impact,max}$	ft-lb (Nm)	114 (155)		114 (155)		332 (450)	332 (450)			332 (450)		332 (450)	
Wrench size		in.	7/16		9/16			3/4			15/16		1-1/8	

- <sup>1</sup>  $T_{inst}$  is the maximum installation torque that may be applied with a torque wrench.
- <sup>2</sup> Because of variability in measurement procedures, the published torque of an impact tool may not correlate properly with the above setting torques. Over torquing can damage the anchor and/or reduce its holding capacity.
- <sup>3</sup> For more information on KWIK HUS-EZ installed in masonry, see ESR-3056 and section 3.3.6.3.3.

Figure 1 - Hilti KWIK HUS-EZ specifications

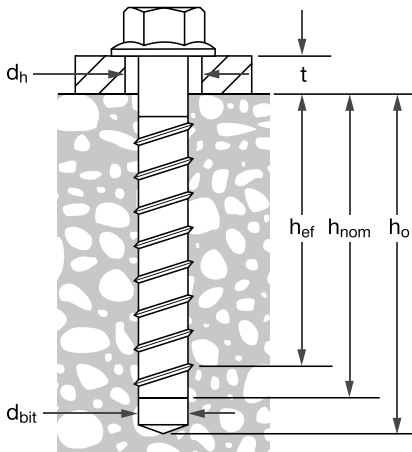

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

**Table 2 - Hilti KWIK HUS-EZ design strength with concrete/pullout failure in uncracked concrete<sup>1,2,3,4,5</sup>**

Nominal anchor diameter in.	Nominal embed. in. (mm)	Tension - $\phi N_n$				Shear - $\phi V_n$			
		$f'_c = 2,500$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 6,000$ psi lb (kN)	$f'_c = 2,500$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 6,000$ psi lb (kN)
1/4	1-5/8 (41)	585 (2.6)	620 (2.8)	675 (3.0)	765 (3.4)	1,075 (4.8)	1,180 (5.2)	1,360 (6.0)	1,670 (7.4)
	2-1/2 (64)	1,525 (6.8)	1,670 (7.4)	1,930 (8.6)	2,365 (10.5)	2,235 (9.9)	2,450 (10.9)	2,825 (12.6)	3,460 (15.4)
3/8	1-5/8 (41)	910 (4.0)	1,000 (4.4)	1,155 (5.1)	1,415 (6.3)	980 (4.4)	1,075 (4.8)	1,245 (5.5)	1,520 (6.8)
	2-1/2 (64)	1,980 (8.8)	2,165 (9.6)	2,505 (11.1)	3,065 (13.6)	2,130 (9.5)	2,335 (10.4)	2,695 (12.0)	3,300 (14.7)
	3-1/4 (83)	3,085 (13.7)	3,375 (15.0)	3,900 (17.3)	4,775 (21.2)	6,640 (29.5)	7,275 (32.4)	8,400 (37.4)	10,290 (45.8)
1/2	2-1/4 (57)	1,645 (7.3)	1,800 (8.0)	2,080 (9.3)	2,550 (11.3)	1,770 (7.9)	1,940 (8.6)	2,240 (10.0)	2,745 (12.2)
	3 (76)	2,785 (12.4)	3,050 (13.6)	3,525 (15.7)	4,315 (19.2)	3,000 (13.3)	3,285 (14.6)	3,795 (16.9)	4,645 (20.7)
	4-1/4 (108)	5,070 (22.6)	5,555 (24.7)	6,415 (28.5)	7,855 (34.9)	10,920 (48.6)	11,965 (53.2)	13,815 (61.5)	16,920 (75.3)
5/8	3-1/4 (83)	3,240 (14.4)	3,550 (15.8)	4,100 (18.2)	5,025 (22.4)	3,490 (15.5)	3,825 (17.0)	4,415 (19.6)	5,410 (24.1)
	5 (127)	6,705 (29.8)	7,345 (32.7)	8,485 (37.7)	10,390 (46.2)	14,445 (64.3)	15,825 (70.4)	18,270 (81.3)	22,380 (99.6)
3/4	4 (102)	4,380 (19.5)	4,795 (21.3)	5,540 (24.6)	6,785 (30.2)	9,430 (41.9)	10,330 (45.9)	11,930 (53.1)	14,610 (65.0)
	6-1/4 (159)	9,345 (41.6)	10,235 (45.5)	11,820 (52.6)	14,475 (64.4)	20,125 (89.5)	22,045 (98.1)	25,455 (113.2)	31,175 (138.7)

**3.3.6**
**Table 3 - Hilti KWIK HUS-EZ design strength with concrete/pullout failure in cracked concrete<sup>1,2,3,4,5</sup>**

Nominal anchor diameter in.	Nominal embed. in. (mm)	Tension - $\phi N_n$				Shear - $\phi V_n$			
		$f'_c = 2,500$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 6,000$ psi lb (kN)	$f'_c = 2,500$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 6,000$ psi lb (kN)
1/4	1-5/8 (41)	300 (1.3)	315 (1.4)	345 (1.5)	390 (1.7)	765 (3.4)	835 (3.7)	965 (4.3)	1,180 (5.2)
	2-1/2 (64)	760 (3.4)	830 (3.7)	960 (4.3)	1,175 (5.2)	1,585 (7.1)	1,735 (7.7)	2,000 (8.9)	2,450 (10.9)
3/8	1-5/8 (41)	475 (2.1)	520 (2.3)	600 (2.7)	730 (3.2)	695 (3.1)	760 (3.4)	880 (3.9)	1,080 (4.8)
	2-1/2 (64)	1,400 (6.2)	1,535 (6.8)	1,775 (7.9)	2,170 (9.7)	1,510 (6.7)	1,655 (7.4)	1,910 (8.5)	2,340 (10.4)
	3-1/4 (83)	2,185 (9.7)	2,390 (10.6)	2,765 (12.3)	3,385 (15.1)	4,705 (20.9)	5,155 (22.9)	5,950 (26.5)	7,285 (32.4)
1/2	2-1/4 (57)	1,035 (4.6)	1,135 (5.0)	1,310 (5.8)	1,605 (7.1)	1,115 (5.0)	1,220 (5.4)	1,410 (6.3)	1,725 (7.7)
	3 (76)	1,755 (7.8)	1,920 (8.5)	2,220 (9.9)	2,715 (12.1)	1,890 (8.4)	2,070 (9.2)	2,390 (10.6)	2,925 (13.0)
	4-1/4 (108)	3,190 (14.2)	3,495 (15.5)	4,040 (18.0)	4,945 (22.0)	6,875 (30.6)	7,530 (33.5)	8,695 (38.7)	10,650 (47.4)
5/8	3-1/4 (83)	2,040 (9.1)	2,235 (9.9)	2,580 (11.5)	3,165 (14.1)	2,200 (9.8)	2,410 (10.7)	2,780 (12.4)	3,405 (15.1)
	5 (127)	4,225 (18.8)	4,625 (20.6)	5,340 (23.8)	6,540 (29.1)	9,095 (40.5)	9,965 (44.3)	11,505 (51.2)	14,090 (62.7)
3/4	4 (102)	2,755 (12.3)	3,020 (13.4)	3,485 (15.5)	4,270 (19.0)	5,940 (26.4)	6,505 (28.9)	7,510 (33.4)	9,200 (40.9)
	6-1/4 (159)	5,885 (26.2)	6,445 (28.7)	7,440 (33.1)	9,115 (40.5)	12,670 (56.4)	13,880 (61.7)	16,030 (71.3)	19,630 (87.3)


- See section 3.1.8.6 to convert design strength value to ASD value.
- Linear interpolation between embedment depths and concrete compressive strengths is not permitted.
- Apply spacing, edge distance, and concrete thickness factors in table 6 to 15 as necessary. Compare to the steel values in table 4. The lesser of the values is to be used for the design.
- Tabular values are for normal weight concrete only. For lightweight concrete multiply design strength by  $\lambda_a$  as follows:  
for sand-lightweight,  $\lambda_a = 0.68$ ; for all-lightweight,  $\lambda_a = 0.60$
- Tabular values are for static loads only. Seismic design is not permitted for uncracked concrete. For seismic tension loads, multiply cracked concrete tabular values in tension by the following reduction factors:  
1/4-in diameter by 1-5/8-in nominal embedment depth -  $\alpha_{seis} = 0.60$   
All other sizes -  $\alpha_{seis} = 0.75$   
No reduction needed for seismic shear. See section 3.1.8.7 for additional information on seismic applications.

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 4 - Steel design strength for Hilti KWIK HUS-EZ anchors<sup>1,2</sup>**


Nominal anchor diameter in.	Nominal embedment in. (mm)			Tensile $\phi N_{sa}$ <sup>3</sup> lb (kN)	Shear $\phi V_{sa}$ <sup>4</sup> lb (kN)	Seismic shear $\phi V_{sa,eq}$ <sup>5</sup> lb (kN)
	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)			
1/4	1-5/8 (41)	2-1/2 (64)		3,945 (17.5)	930 (4.1)	835 (3.7)
3/8	1-5/8 (41)			5,980 (26.6)	2,200 (9.8)	2,200 (9.8)
	2-1/2 (64)	3-1/4 (83)		6,720 (29.9)	3,110 (13.8)	1,865 (8.3)
1/2	2-1/4 (57)	3 (76)	4-1/4 (108)	11,780 (52.4)	5,545 (24.7)	3,330 (14.8)
5/8	3-1/4 (83)		5 (127)	15,735 (70.0)	6,735 (30.0)	4,040 (18.0)
3/4	4 (102)	6-1/4 (159)		20,810 (92.6)	9,995 (44.5)	6,935 (30.8)

- 1 See section 3.1.8.6 to convert design strength value to ASD value.
- 2 KWIK HUS-EZ anchors are to be considered brittle steel elements.
- 3 Tensile  $\phi N_{sa} = \phi A_{se,N} f_{uta}$  as noted in ACI 318-14 Chapter 17.
- 4 Shear values determined by static shear tests with  $\phi V_{sa} < \phi 0.60 A_{se,V} f_{uta}$  as noted in ACI 318-14 Chapter 17.
- 5 Seismic shear values determined by seismic shear tests with  $\phi V_{sa,eq} < \phi 0.60 A_{se,V} f_{uta}$  as noted in ACI 318-14 Chapter 17. See section 3.1.8.7 for additional information on seismic applications.

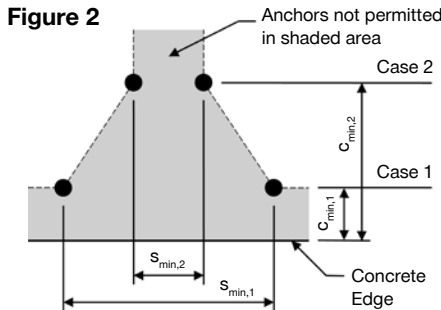

For a specific edge distance, the permitted spacing is calculated as follows:

$$s \geq s_{min,2} + \frac{(s_{min,1} - s_{min,2})}{(c_{min,1} - c_{min,2})} (c - c_{min,2})$$

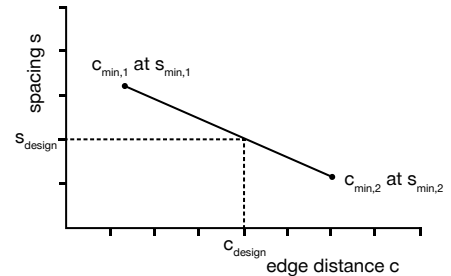

**Table 5 - Hilti KWIK HUS-EZ specifications**

Setting information	Symbol	Units	Nominal anchor diameter											
			1/4		3/8			1/2			5/8		3/4	
Effective minimum embedment	$h_{ef}$	in.	1.18	1.92	1.11	1.86	2.50	1.50	2.16	3.22	2.39	3.88	2.92	4.84
Minimum member thickness	$h_{min}$	in.	3-1/4	4.125	3-1/4	4	4-7/8	4-1/2	4 3/4	6-3/4	5	7	6	8-1/8
Case 1	$c_{min,1}$	in.	1.50						1.75					
	for $s_{min,1} \geq$	in.	3						4					
Case 2	$c_{min,2}$	in.	2	2.78	2.63	2.92	3.75	2.75	3.75	5.25	3.63	5.81	4.41	7.28
	for $s_{min,2} \geq$	in.	1.50		2.25			3						

- 1 Linear interpolation is permitted to establish an edge distance and spacing combination between Case 1 and Case 2. Linear interpolation for a specific edge distance c, where  $c_{min,1} < c < c_{min,2}$  will determine the permissible spacings.

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

**Table 6 - Load adjustment factors for 1/4-in. diameter Hilti KWIK HUS-EZ in uncracked concrete<sup>1,2</sup>**

1/4-in. KH-EZ uncracked concrete		Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$	
								⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$			
Embedment $h_{nom}$	in. (mm)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)
		Spacing (s)/edge distance ( $c_e$ )/concrete thickness (h) - in. (mm)	1-1/2 (38)	0.71	0.63	0.78	0.65	0.59	0.56	0.40	0.21	0.78	0.42
2 (51)	0.78		0.67	1.00	0.77	0.62	0.58	0.61	0.33	1.00	0.65	n/a	n/a
2-1/2 (64)	0.85		0.72		0.90	0.65	0.60	0.86	0.46		0.90	n/a	n/a
3 (76)	0.92		0.76		1.00	0.68	0.62	1.00	0.60		1.00	n/a	n/a
3-1/4 (83)	0.96		0.78			0.70	0.63		0.68			0.88	n/a
3-1/2 (89)	0.99		0.80			0.71	0.64		0.76			0.92	n/a
4 (102)	1.00		0.85			0.74	0.66		0.92			0.98	n/a
4-1/8 (105)			0.86			0.75	0.66		0.97			1.00	0.81
4-1/2 (114)			0.89			0.77	0.68		1.00				0.84
5 (127)			0.93			0.80	0.70						0.89
5-1/2 (140)			0.98			0.83	0.72						0.93
6 (152)			1.00			0.86	0.74						0.97
7 (178)						0.92	0.78						1.00
8 (203)						0.98	0.82						
9 (229)					1.00	0.86							
10 (254)						0.89							
11 (279)						0.93							
12 (305)						0.97							
14 (356)						1.00							

3.3.6

**Table 7 - Load adjustment factors for 1/4-in. diameter Hilti KWIK HUS-EZ in cracked concrete<sup>1,2</sup>**

1/4-in. KH-EZ cracked concrete		Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$	
								⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$			
Embedment $h_{nom}$	in. (mm)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)
		Spacing (s)/edge distance ( $c_e$ )/concrete thickness (h) - in. (mm)	1-1/2 (38)	0.71	0.63	0.88	0.65	0.59	0.56	0.40	0.21	0.80	0.43
2 (51)	0.78		0.67	1.00	0.77	0.62	0.58	0.62	0.33	1.00	0.66	n/a	n/a
2-1/2 (64)	0.85		0.72		0.90	0.65	0.60	0.87	0.46		0.90	n/a	n/a
3 (76)	0.92		0.76		1.00	0.68	0.62	1.00	0.60		1.00	n/a	n/a
3-1/4 (83)	0.96		0.78			0.70	0.63		0.68			0.89	n/a
3-1/2 (89)	0.99		0.80			0.71	0.64		0.76			0.92	n/a
4 (102)	1.00		0.85			0.74	0.66		0.93			0.98	n/a
4-1/8 (105)			0.86			0.75	0.66		0.97			1.00	0.81
4-1/2 (114)			0.89			0.77	0.68		1.00				0.85
5 (127)			0.93			0.80	0.70						0.89
5-1/2 (140)			0.98			0.83	0.72						0.93
6 (152)			1.00			0.86	0.74						0.98
7 (178)						0.92	0.78						1.00
8 (203)						0.98	0.82						
9 (229)					1.00	0.86							
10 (254)						0.90							
11 (279)						0.94							
12 (305)						0.98							
14 (356)						1.00							

- 1 Linear interpolation not permitted.
  - 2 When combining multiple load adjustment factors (e.g. for a 4 anchor pattern in a corner with thin concrete member) the design can become very conservative. To optimize the design, use Hilti PROFIS Anchor Design software or perform anchor calculation using design equations from ACI 318-14 Chapter 17.
  - 3 Spacing factor reduction in shear,  $f_{AV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{AV} = f_{AN}$ .
  - 4 Concrete thickness reduction factor in shear,  $f_{HV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{HV} = 1.0$ .
- ☐ If a reduction factor value is in a shaded cell, this indicates that this specific edge distance may not be permitted with a certain spacing (or vice versa). Check with table 5 and figure 2 of this section to calculate permissible edge distance, spacing and concrete thickness combinations.

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 8 - Load adjustment factors for 3/8-in. diameter Hilti KWIK HUS-EZ in uncracked concrete<sup>1,2</sup>**

3/8-in. KH-EZ uncracked concrete		Spacing factor in tension $f_{AN}$			Edge distance factor in tension $f_{RN}$			Spacing factor in shear <sup>3</sup> $f_{AV}$			Edge distance in shear						Conc. thickness factor in shear <sup>4</sup> $f_{HV}$				
											⊥ toward edge $f_{RV}$			to and away from edge $f_{RV}$							
											1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)				1-5/8 (41)	2-1/2 (64)
Spacing (s)/edge distance (c)/concrete thickness (h) - in. (mm)	Embedment $h_{nom}$	in.	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	
	(mm)																				
	1-1/2 (38)	n/a	n/a	n/a	0.58	0.63	0.57	n/a	n/a	n/a	0.49	0.25	0.08	0.58	0.50	0.17	n/a	n/a	n/a	n/a	
	2 (51)	n/a	n/a	n/a	0.76	0.75	0.66	n/a	n/a	n/a	0.75	0.38	0.13	0.76	0.75	0.26	n/a	n/a	n/a	n/a	
	2-1/4 (57)	0.84	0.70	0.65	0.86	0.81	0.70	0.65	0.60	0.55	0.90	0.46	0.16	0.90	0.81	0.31	n/a	n/a	n/a	n/a	
	2-1/2 (64)	0.88	0.72	0.67	0.95	0.88	0.75	0.67	0.61	0.55	1.00	0.54	0.18	1.00	0.88	0.37	n/a	n/a	n/a	n/a	
	3 (76)	0.95	0.77	0.70	1.00	1.00	0.85	0.71	0.63	0.56	1.00	0.71	0.24	1.00	1.00	0.48	n/a	n/a	n/a	n/a	
	3-1/4 (83)	0.99	0.79	0.72				0.90	0.72	0.64	0.57			0.80	0.27		0.54	0.95	n/a	n/a	
	3-1/2 (89)	1.00	0.81	0.73				0.95	0.74	0.65	0.58			0.89	0.30		0.61	0.98	n/a	n/a	
	4 (102)		0.86	0.77				1.00	0.78	0.68	0.59			1.00	0.37		0.74	1.00	0.84	n/a	
	4-1/2 (114)		0.90	0.80					0.81	0.70	0.60				0.44			0.88		0.89	n/a
	4-3/4 (121)		0.93	0.82					0.83	0.71	0.60				0.48			0.96		0.91	0.64
	5 (127)		0.95	0.83					0.84	0.72	0.61				0.52		1.00		0.94	0.66	
	6 (152)		1.00	0.90					0.91	0.76	0.63				0.68				1.00	0.72	
	7 (178)			0.97					0.98	0.81	0.65				0.86						0.78
	8 (203)			1.00					1.00	0.85	0.67				1.00						0.83
	9 (229)									0.90	0.69										0.88
	10 (254)									0.94	0.71										0.93
	11 (279)									0.98	0.74										0.97
	12 (305)									1.00	0.76										1.00
	14 (356)										0.80										
	16 (406)										0.84										
	18 (457)										0.89										
	20 (508)										0.93										
24 (610)										1.00											

**Table 9 - Load adjustment factors for 3/8-in. diameter Hilti KWIK HUS-EZ in cracked concrete<sup>1,2</sup>**

3/8-in. KH-EZ cracked concrete		Spacing factor in tension $f_{AN}$			Edge distance factor in tension $f_{RN}$			Spacing factor in shear <sup>3</sup> $f_{AV}$			Edge distance in shear						Conc. thickness factor in shear <sup>4</sup> $f_{HV}$				
											⊥ toward edge $f_{RV}$			to and away from edge $f_{RV}$							
											1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)				1-5/8 (41)	2-1/2 (64)
Spacing (s)/edge distance (c)/concrete thickness (h) - in. (mm)	Embedment $h_{nom}$	in.	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	
	(mm)																				
	1-1/2 (38)	n/a	n/a	n/a	0.92	0.66	0.57	n/a	n/a	n/a	0.49	0.25	0.09	0.92	0.50	0.17	n/a	n/a	n/a	n/a	
	2 (51)	n/a	n/a	n/a	1.00	0.79	0.66	n/a	n/a	n/a	0.76	0.39	0.13	1.00	0.77	0.26	n/a	n/a	n/a	n/a	
	2-1/4 (57)	0.84	0.70	0.65	1.00	0.85	0.70	0.66	0.60	0.55	0.90	0.46	0.16	1.00	0.85	0.31	n/a	n/a	n/a	n/a	
	2-1/2 (64)	0.88	0.72	0.67	1.00	0.92	0.75	0.67	0.61	0.55	1.00	0.54	0.18	1.00	0.92	0.37	n/a	n/a	n/a	n/a	
	3 (76)	0.95	0.77	0.70	1.00	1.00	0.85	0.71	0.63	0.56	1.00	0.71	0.24	1.00	1.00	0.48	n/a	n/a	n/a	n/a	
	3-1/4 (83)	0.99	0.79	0.72				0.90	0.73	0.64	0.57			0.80	0.27		0.55	0.95	n/a	n/a	
	3-1/2 (89)	1.00	0.81	0.73				0.95	0.74	0.65	0.58			0.90	0.31		0.61	0.98	n/a	n/a	
	4 (102)		0.86	0.77				1.00	0.78	0.68	0.59			1.00	0.37		0.75	1.00	0.84	n/a	
	4-1/2 (114)		0.90	0.80					0.81	0.70	0.60				0.44			0.89		0.89	n/a
	4-3/4 (121)		0.93	0.82					0.83	0.71	0.60				0.48			0.97		0.92	0.64
	5 (127)		0.95	0.83					0.85	0.72	0.61				0.52		1.00		0.94	0.66	
	6 (152)		1.00	0.90					0.92	0.77	0.63				0.69				1.00	0.72	
	7 (178)			0.97					0.98	0.81	0.65				0.86						0.78
	8 (203)			1.00					1.00	0.85	0.67				1.00						0.83
	9 (229)									0.90	0.69										0.88
	10 (254)									0.94	0.72										0.93
	11 (279)									0.99	0.74										0.97
	12 (305)									1.00	0.76										1.00
	14 (356)										0.80										
	16 (406)										0.85										
	18 (457)										0.89										
	20 (508)										0.93										
24 (610)										1.00											

1 Linear interpolation not permitted.  
 2 When combining multiple load adjustment factors (e.g. for a 4 anchor pattern in a corner with thin concrete member) the design can become very conservative. To optimize the design, use Hilti PROFIS Anchor Design software or perform anchor calculation using design equations from ACI 318-14 Chapter 17.  
 3 Spacing factor reduction in shear,  $f_{AV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{AV} = f_{AN}$ .  
 4 Concrete thickness reduction factor in shear,  $f_{HV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{HV} = 1.0$ .  
 If a reduction factor value is in a shaded cell, this indicates that this specific edge distance may not be permitted with a certain spacing (or vice versa). Check table 5 and figure 2 of this section to calculate permissible edge distance, spacing and concrete thickness combinations.

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

**Table 10 - Load adjustment factors for 1/2-in. diameter Hilti KWIK HUS-EZ in uncracked concrete<sup>1,2</sup>**

1/2-in. KH-EZ uncracked concrete	Spacing factor in tension $f_{AN}$			Edge distance factor in tension $f_{RN}$			Spacing factor in shear <sup>3</sup> $f_{AV}$			Edge distance in shear						Conc. thickness factor in shear <sup>4</sup> $f_{HV}$			
										⊥ toward edge $f_{RV}$			to and away from edge $f_{RV}$						
Embedment $h_{nom}$ in. (mm)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	
Spacing (s)/edge distance (c <sub>s</sub> )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	n/a	0.68	0.57	0.51	n/a	n/a	n/a	0.40	0.25	0.07	0.68	0.50	0.15	n/a	n/a	n/a
	2 (51)	n/a	n/a	n/a	0.75	0.62	0.54	n/a	n/a	n/a	0.48	0.31	0.09	0.75	0.61	0.18	n/a	n/a	n/a
	2-1/2 (64)	n/a	n/a	n/a	0.91	0.71	0.60	n/a	n/a	n/a	0.68	0.43	0.13	0.91	0.71	0.25	n/a	n/a	n/a
	3 (76)	0.83	0.73	0.66	1.00	0.81	0.66	0.65	0.61	0.55	0.89	0.56	0.17	1.00	0.81	0.33	n/a	n/a	n/a
	3-1/2 (89)	0.88	0.77	0.68		0.93	0.73	0.68	0.63	0.56	1.00	0.71	0.21		0.93	0.42	n/a	n/a	n/a
	4 (102)	0.94	0.81	0.71		1.00	0.80	0.71	0.65	0.57		0.87	0.26		1.00	0.52	n/a	n/a	n/a
	4-1/2 (114)	0.99	0.85	0.73			0.87	0.73	0.67	0.58		1.00	0.31			0.62	0.96	n/a	n/a
	4-3/4 (121)	1.00	0.87	0.75			0.91	0.74	0.68	0.58			0.33			0.67	0.99	0.85	n/a
	5 (127)		0.89	0.76			0.95	0.76	0.69	0.58			0.36			0.72	1.00	0.87	n/a
	6 (152)		0.96	0.81			1.00	0.81	0.73	0.60			0.47			0.95		0.95	n/a
	6-3/4 (171)		1.00	0.85				0.85	0.76	0.61			0.57			1.00		1.00	0.68
	7 (178)			0.86				0.86	0.77	0.62			0.60						0.69
	8 (203)			0.91				0.91	0.80	0.64			0.73						0.73
	9 (229)			0.97				0.96	0.84	0.65			0.87						0.78
	10 (254)			1.00				1.00	0.88	0.67			1.00						0.82
	11 (279)								0.92	0.69									0.86
	12 (305)								0.95	0.70									0.90
	14 (356)								1.00	0.74									0.97
	16 (406)									0.77									1.00
	18 (457)									0.80									
20 (508)									0.84										
> 24 (610)									0.91										

3.3.6

**Table 11 - Load adjustment factors for 1/2-in. diameter Hilti KWIK HUS-EZ in cracked concrete<sup>1,2</sup>**

1/2-in. KH-EZ cracked concrete	Spacing factor in tension $f_{AN}$			Edge distance factor in tension $f_{RN}$			Spacing factor in shear <sup>3</sup> $f_{AV}$			Edge distance in shear						Conc. thickness factor in shear <sup>4</sup> $f_{HV}$			
										⊥ toward edge $f_{RV}$			to and away from edge $f_{RV}$						
Embedment $h_{nom}$ in. (mm)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	2-1/4 (57)	3 (76)	4-1/4 (108)	
Spacing (s)/edge distance (c <sub>s</sub> )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	n/a	0.82	0.66	0.55	n/a	n/a	n/a	0.45	0.28	0.08	0.82	0.57	0.17	n/a	n/a	n/a
	2 (51)	n/a	n/a	n/a	0.90	0.72	0.58	n/a	n/a	n/a	0.55	0.35	0.10	0.90	0.70	0.21	n/a	n/a	n/a
	2-1/2 (64)	n/a	n/a	n/a	1.00	0.83	0.65	n/a	n/a	n/a	0.77	0.49	0.14	1.00	0.83	0.29	n/a	n/a	n/a
	3 (76)	0.83	0.73	0.66	1.00	0.94	0.72	0.67	0.62	0.56	1.00	0.64	0.19	1.00	0.94	0.38	n/a	n/a	n/a
	3-1/2 (89)	0.88	0.77	0.68		1.00	0.79	0.70	0.64	0.56		0.80	0.24		1.00	0.48	n/a	n/a	n/a
	4 (102)	0.94	0.81	0.71		1.00	0.87	0.72	0.66	0.57		0.98	0.29		1.00	0.59	n/a	n/a	n/a
	4-1/2 (114)	0.99	0.85	0.73			0.95	0.75	0.69	0.58		1.00	0.35			0.70	1.00	n/a	n/a
	4-3/4 (121)	1.00	0.87	0.75			0.99	0.77	0.70	0.59			0.38			0.76		0.88	n/a
	5 (127)		0.89	0.76			1.00	0.78	0.71	0.59			0.41			0.82		0.91	n/a
	6 (152)		0.96	0.81			1.00	0.84	0.75	0.61			0.54			1.00		0.99	n/a
	6-3/4 (171)		1.00	0.85				0.88	0.78	0.62			0.64					1.00	0.70
	7 (178)			0.86				0.89	0.79	0.63			0.68						0.72
	8 (203)			0.91				0.95	0.83	0.65			0.83						0.77
	9 (229)			0.97				1.00	0.87	0.67			0.99						0.81
	10 (254)			1.00					0.91	0.68			1.00						0.86
	11 (279)								0.95	0.70									0.90
	12 (305)								0.99	0.72									0.94
	14 (356)								1.00	0.76									1.00
	16 (406)									0.79									
	18 (457)									0.83									
20 (508)									0.87										
> 24 (610)									0.94										

- Linear interpolation not permitted.
  - When combining multiple load adjustment factors (e.g. for a 4 anchor pattern in a corner with thin concrete member) the design can become very conservative. To optimize the design, use Hilti PROFIS Anchor Design software or perform anchor calculation using design equations from ACI 318-14 Chapter 17.
  - Spacing factor reduction in shear,  $f_{AV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{AV} = f_{AN}$ .
  - Concrete thickness reduction factor in shear,  $f_{HV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{HV} = 1.0$ .
- ☐ If a reduction factor value is in a shaded cell, this indicates that this specific edge distance may not be permitted with a certain spacing (or vice versa). Check table 5 and figure 2 of this section to calculate permissible edge distance, spacing and concrete thickness combinations.



### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 12 - Load adjustment factors for 5/8-in. diameter Hilti KWIK HUS-EZ in uncracked concrete<sup>1,2</sup>**

5/8-in. KH-EZ uncracked concrete		Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$	
								⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$			
Embedment $h_{nom}$	in. (mm)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)
		Spacing (s)/edge distance ( $c_e$ )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	0.62	0.51	n/a	n/a	0.24	0.06	0.47	0.13
2 (51)	n/a		n/a	0.67	0.54	n/a	n/a	0.29	0.08	0.57	0.15	n/a	n/a
2-1/2 (64)	n/a		n/a	0.76	0.59	n/a	n/a	0.40	0.11	0.76	0.21	n/a	n/a
3 (76)	0.71		0.63	0.86	0.65	0.61	0.55	0.53	0.14	0.86	0.28	n/a	n/a
3-1/2 (89)	0.74		0.65	0.97	0.70	0.63	0.55	0.66	0.18	0.97	0.35	n/a	n/a
4 (102)	0.78		0.67	1.00	0.76	0.65	0.56	0.81	0.22	1.00	0.43	n/a	n/a
4-1/2 (114)	0.81		0.69		0.83	0.66	0.57	0.97	0.26		0.52	n/a	n/a
5 (127)	0.85		0.71		0.89	0.68	0.58	1.00	0.30		0.60	0.85	n/a
5-1/2 (140)	0.88		0.74		0.96	0.70	0.58		0.35		0.70	0.89	n/a
6 (152)	0.92		0.76		1.00	0.72	0.59		0.40		0.80	0.93	n/a
7 (178)	0.99		0.80			0.75	0.61		0.50		1.00	1.00	0.65
8 (203)	1.00		0.84			0.79	0.62		0.61				0.69
9 (229)			0.89			0.83	0.64		0.73				0.74
10 (254)			0.93			0.86	0.65		0.86				0.78
11 (279)			0.97			0.90	0.67		0.99				0.81
12 (305)			1.00			0.94	0.68		1.00				0.85
14 (356)						1.00	0.71						0.92
16 (406)							0.74						0.98
18 (457)						0.77						1.00	
20 (508)						0.80							
24 (610)						0.86							
> 30 (762)						0.95							

**Table 13 - Load adjustment factors for 5/8-in. diameter Hilti KWIK HUS-EZ in cracked concrete<sup>1,2</sup>**

5/8-in. KH-EZ cracked concrete		Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$	
								⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$			
Embedment $h_{nom}$	in. (mm)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)	3-1/4 (83)	5 (127)
		Spacing (s)/edge distance ( $c_e$ )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	0.63	0.51	n/a	n/a	0.27	0.07	0.53	0.14
2 (51)	n/a		n/a	0.68	0.54	n/a	n/a	0.33	0.09	0.65	0.17	n/a	n/a
2-1/2 (64)	n/a		n/a	0.77	0.59	n/a	n/a	0.46	0.12	0.77	0.24	n/a	n/a
3 (76)	0.71		0.63	0.87	0.65	0.62	0.55	0.60	0.16	0.87	0.32	n/a	n/a
3-1/2 (89)	0.74		0.65	0.98	0.70	0.64	0.56	0.75	0.20	0.98	0.40	n/a	n/a
4 (102)	0.78		0.67	1.00	0.76	0.66	0.57	0.92	0.25	1.00	0.49	n/a	n/a
4-1/2 (114)	0.81		0.69		0.83	0.68	0.57	1.00	0.29		0.59	n/a	n/a
5 (127)	0.85		0.71		0.89	0.70	0.58		0.34		0.69	0.89	n/a
5-1/2 (140)	0.88		0.74		0.96	0.72	0.59		0.40		0.79	0.93	n/a
6 (152)	0.92		0.76		1.00	0.74	0.60		0.45		0.90	0.97	n/a
7 (178)	0.99		0.80			0.78	0.61		0.57		1.00	1.00	0.68
8 (203)	1.00		0.84			0.82	0.63		0.69				0.72
9 (229)			0.89			0.86	0.65		0.83				0.77
10 (254)			0.93			0.89	0.66		0.97				0.81
11 (279)			0.97			0.93	0.68		1.00				0.85
12 (305)			1.00			0.97	0.70						0.89
14 (356)						1.00	0.73						0.96
16 (406)							0.76						1.00
18 (457)						0.79							
20 (508)						0.83							
24 (610)						0.89							
> 30 (762)						0.99							

1 Linear interpolation not permitted.  
 2 When combining multiple load adjustment factors (e.g. for a 4 anchor pattern in a corner with thin concrete member) the design can become very conservative. To optimize the design, use Hilti PROFIS Anchor Design software or perform anchor calculation using design equations from ACI 318-14 Chapter 17.  
 3 Spacing factor reduction in shear,  $f_{AV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{AV} = f_{AN}$ .  
 4 Concrete thickness reduction factor in shear,  $f_{HV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{HV} = 1.0$ .  
 If a reduction factor value is in a shaded cell, this indicates that this specific edge distance may not be permitted with a certain spacing (or vice versa). Check with table 5 and figure 2 of this section to calculate permissible edge distance, spacing and concrete thickness combinations.

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

**Table 14 - Load adjustment factors for 3/4-in. diameter Hilti KWIK HUS-EZ in uncracked concrete<sup>1,2</sup>**

3/4-in. KH-EZ uncracked concrete		Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$	
								⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$			
Embedment $h_{nom}$	in. (mm)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)
Spacing (s)/edge distance ( $c_a$ )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	0.57	0.48	n/a	n/a	0.10	0.05	0.19	0.10	n/a	n/a
	2 (51)	n/a	n/a	0.61	0.50	n/a	n/a	0.12	0.06	0.23	0.12	n/a	n/a
	2-1/2 (64)	n/a	n/a	0.68	0.54	n/a	n/a	0.16	0.08	0.33	0.17	n/a	n/a
	3 (76)	0.67	0.60	0.76	0.58	0.56	0.54	0.21	0.11	0.43	0.22	n/a	n/a
	3-1/2 (89)	0.70	0.62	0.84	0.62	0.57	0.55	0.27	0.14	0.54	0.28	n/a	n/a
	4 (102)	0.73	0.64	0.93	0.67	0.58	0.55	0.33	0.17	0.66	0.34	n/a	n/a
	4-1/2 (114)	0.76	0.65	1.00	0.72	0.59	0.56	0.39	0.20	0.79	0.41	n/a	n/a
	5 (127)	0.79	0.67		0.76	0.60	0.56	0.46	0.24	0.92	0.48	n/a	n/a
	5-1/2 (140)	0.81	0.69		0.81	0.61	0.57	0.53	0.28	1.00	0.55	n/a	n/a
	6 (152)	0.84	0.71		0.86	0.62	0.58	0.61	0.31		0.63	0.69	n/a
	7 (178)	0.90	0.74		0.97	0.64	0.59	0.77	0.40		0.79	0.75	n/a
	8 (203)	0.96	0.78		1.00	0.66	0.60	0.94	0.48		0.97	0.80	n/a
	8-1/8 (206)	0.96	0.78			0.66	0.60	0.96	0.50		0.99	0.80	0.65
	9 (229)	1.00	0.81			0.68	0.62	1.00	0.58		1.00	0.85	0.68
	10 (254)		0.84			0.70	0.63		0.68			0.89	0.72
	11 (279)		0.88			0.72	0.64		0.78			0.94	0.75
	12 (305)		0.91			0.74	0.65		0.89			0.98	0.79
	14 (356)		0.98			0.78	0.68		1.00			1.00	0.85
	16 (406)		1.00			0.82	0.71						0.91
	18 (457)					0.86	0.73						0.96
20 (508)					0.90	0.76						1.00	
24 (610)					0.98	0.81							
30 (762)					1.00	0.89							
> 36 (914)						0.96							

**3.3.6**
**Table 15 - Load adjustment factors for 3/4-in. diameter Hilti KWIK HUS-EZ in cracked concrete<sup>1,2</sup>**

3/4-in. KH-EZ cracked concrete		Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$	
								⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$			
Embedment $h_{nom}$	in. (mm)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)	4 (102)	6-1/4 (159)
Spacing (s)/edge distance ( $c_a$ )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	0.57	0.48	n/a	n/a	0.11	0.06	0.22	0.11	n/a	n/a
	2 (51)	n/a	n/a	0.61	0.50	n/a	n/a	0.13	0.07	0.27	0.14	n/a	n/a
	2-1/2 (64)	n/a	n/a	0.68	0.54	n/a	n/a	0.19	0.10	0.37	0.19	n/a	n/a
	3 (76)	0.67	0.60	0.76	0.58	0.57	0.54	0.24	0.13	0.49	0.25	n/a	n/a
	3-1/2 (89)	0.70	0.62	0.85	0.63	0.58	0.55	0.31	0.16	0.61	0.32	n/a	n/a
	4 (102)	0.73	0.64	0.93	0.67	0.59	0.56	0.38	0.19	0.75	0.39	n/a	n/a
	4-1/2 (114)	0.76	0.65	1.00	0.72	0.60	0.56	0.45	0.23	0.90	0.46	n/a	n/a
	5 (127)	0.79	0.67		0.77	0.61	0.57	0.52	0.27	1.00	0.54	n/a	n/a
	5-1/2 (140)	0.81	0.69		0.81	0.62	0.58	0.60	0.31		0.63	n/a	n/a
	6 (152)	0.84	0.71		0.87	0.63	0.58	0.69	0.36		0.71	0.72	n/a
	7 (178)	0.90	0.74		0.97	0.65	0.60	0.87	0.45		0.90	0.78	n/a
	8 (203)	0.96	0.78		1.00	0.67	0.61	1.00	0.55		1.00	0.83	n/a
	8-1/8 (206)	0.96	0.78			0.68	0.61		0.56			0.84	0.67
	9 (229)	1.00	0.81			0.70	0.63		0.66			0.88	0.71
	10 (254)		0.84			0.72	0.64		0.77			0.93	0.75
	11 (279)		0.88			0.74	0.65		0.89			0.98	0.78
	12 (305)		0.91			0.76	0.67		1.00			1.00	0.82
	14 (356)		0.98			0.80	0.70						0.89
	16 (406)		1.00			0.85	0.72						0.95
	18 (457)					0.89	0.75						1.00
20 (508)					0.93	0.78							
24 (610)					1.00	0.84							
30 (762)						0.92							
> 36 (914)						1.00							

1 Linear interpolation not permitted.

2 When combining multiple load adjustment factors (e.g. for a 4 anchor pattern in a corner with thin concrete member) the design can become very conservative. To optimize the design, use Hilti PROFIS Anchor Design software or perform anchor calculation using design equations from ACI 318-14 Chapter 17.

 3 Spacing factor reduction in shear,  $f_{AV}$  assumes an influence of a nearby edge. If no edge exists, then  $f_{AV} = f_{AN}$ .

 4 Concrete thickness reduction factor in shear,  $f_{HV}$  assumes an influence of a nearby edge. If no edge exists, then  $f_{HV} = 1.0$ .

If a reduction factor value is in a shaded cell, this indicates that this specific edge distance may not be permitted with a certain spacing (or vice versa). Check with table 5 and figure 2 of this section to calculate permissible edge distance, spacing and concrete thickness combinations.

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 16 - Hilti KWIK HUS-EZ in the soffit of uncracked lightweight concrete over metal deck<sup>1,2,3,4,5,6,7</sup>**

Nominal anchor diameter in.	Nominal embedment in. (mm)	Installation in lower flute				Installation in upper flute			
		Tension - $\phi N_n$		Shear - $\phi V_n$		Tension - $\phi N_n$		Shear - $\phi V_n$	
		$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)
1/4	1-5/8 (41)	545 (2.4)	595 (2.6)	725 (3.2)	725 (3.2)	670 (3.0)	730 (3.2)	725 (3.2)	725 (3.2)
	2-1/2 (64)	1,220 (5.4)	1,410 (6.3)	1,325 (5.9)	1,325 (5.9)	1,275 (5.7)	1,470 (6.5)	1,960 (8.7)	1,960 (8.7)
3/8	1-5/8 (41)	845 (3.8)	975 (4.3)	905 (4.0)	905 (4.0)	970 (4.3)	1,120 (5.0)	2,200 (9.8)	2,200 (9.8)
	2-1/2 (64)	1,455 (6.5)	1,680 (7.5)	905 (4.0)	905 (4.0)	1,900 (8.5)	2,195 (9.8)	3,655 (16.3)	3,655 (16.3)
	3-1/4 (83)	2,550 (11.3)	2,945 (13.1)	2,165 (9.6)	2,165 (9.6)	n/a	n/a	n/a	n/a
1/2	2-1/4 (57)	850 (3.8)	980 (4.4)	965 (4.3)	965 (4.3)	905 (4.0)	1,045 (4.6)	4,710 (21.0)	4,710 (21.0)
	3 (76)	1,990 (8.9)	2,300 (10.2)	1,750 (7.8)	1,750 (7.8)	n/a	n/a	n/a	n/a
	4-1/4 (108)	3,485 (15.5)	4,025 (17.9)	2,155 (9.6)	2,155 (9.6)	n/a	n/a	n/a	n/a
5/8	3-1/4 (83)	2,715 (12.1)	3,135 (13.9)	2,080 (9.3)	2,080 (9.3)	n/a	n/a	n/a	n/a
	5 (127)	6,170 (27.4)	7,125 (31.7)	2,515 (11.2)	2,515 (11.2)	n/a	n/a	n/a	n/a
3/4	4 (102)	2,715 (12.1)	3,135 (13.9)	2,255 (10.0)	2,255 (10.0)	n/a	n/a	n/a	n/a


**Table 17 - Hilti KWIK HUS-EZ in the soffit of cracked lightweight concrete over metal deck<sup>1,2,3,4,5,6</sup>**

Nominal anchor diameter in.	Nominal embedment in. (mm)	Installation in lower flute				Installation in upper flute			
		Tension - $\phi N_n^7$		Shear - $\phi V_n^{7,8}$		Tension - $\phi N_n^7$		Shear - $\phi V_n^{7,8}$	
		$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)	$f'_c = 3,000$ psi lb (kN)	$f'_c = 4,000$ psi lb (kN)
1/4	1-5/8 (41)	280 (1.2)	305 (1.4)	725 (3.2)	725 (3.2)	340 (1.5)	370 (1.6)	725 (3.2)	725 (3.2)
	2-1/2 (64)	605 (2.7)	700 (3.1)	1,325 (5.9)	1,325 (5.9)	635 (2.8)	735 (3.3)	1,960 (8.7)	1,960 (8.7)
3/8	1-5/8 (41)	525 (2.3)	605 (2.7)	905 (4.0)	905 (4.0)	770 (3.4)	890 (4.0)	2,200 (9.8)	2,200 (9.8)
	2-1/2 (64)	1,035 (4.6)	1,195 (5.3)	905 (4.0)	905 (4.0)	1,345 (6.0)	1,555 (6.9)	3,655 (16.3)	3,655 (16.3)
	3-1/4 (83)	1,805 (8.0)	2,085 (9.3)	2,165 (9.6)	2,165 (9.6)	n/a	n/a	n/a	n/a
1/2	2-1/4 (57)	535 (2.4)	620 (2.8)	965 (4.3)	965 (4.3)	640 (2.8)	740 (3.3)	4,710 (21.0)	4,710 (21.0)
	3 (76)	1,255 (5.6)	1,450 (6.4)	1,750 (7.8)	1,750 (7.8)	n/a	n/a	n/a	n/a
	4-1/4 (108)	2,195 (9.8)	2,535 (11.3)	2,155 (9.6)	2,155 (9.6)	n/a	n/a	n/a	n/a
5/8	3-1/4 (83)	1,710 (7.6)	1,975 (8.8)	2,080 (9.3)	2,080 (9.3)	n/a	n/a	n/a	n/a
	5 (127)	3,885 (17.3)	4,485 (20.0)	2,515 (11.2)	2,515 (11.2)	n/a	n/a	n/a	n/a
3/4	4 (102)	1,710 (7.6)	1,975 (8.8)	2,255 (10.0)	2,255 (10.0)	n/a	n/a	n/a	n/a

- See section 3.1.8.6 to convert design strength value to ASD value.
- Linear interpolation between embedment depths and concrete compressive strengths is not permitted.
- Tabular value is for one anchor per flute. Minimum spacing along the length of the flute is  $3 \times h_{nom}$  (nominal embedment).
- Tabular values are lightweight concrete and no additional reduction factor is needed.
- No additional reduction factors for spacing or edge distance need to be applied.
- Comparison to steel values in table 4 is not required. Values in tables 16 and 17 control.
- Tabular values are for static loads only. Seismic design is not permitted for uncracked concrete. For seismic tension loads, multiply cracked concrete tabular values in tension only by  $\alpha_{v,seis} = 0.75$ . See section 3.1.8.7 for additional information on seismic applications.
- For the following anchor sizes, an additional factor for seismic shear must be applied to the cracked concrete tabular values for seismic conditions:  
 1/4-inch diameter -  $\alpha_{v,seis} = 0.75$   
 3/8-inch diameter -  $\alpha_{v,seis} = 0.60$   
 1/2-inch diameter -  $\alpha_{v,seis} = 0.60$   
 5/8-inch diameter -  $\alpha_{v,seis} = 0.60$   
 3/4-inch diameter -  $\alpha_{v,seis} = 0.70$

### KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6


Figure 3 – Installation of Hilti KWIK HUS-EZ (KH-EZ) in soffit of concrete over steel deck floor and roof assemblies<sup>1</sup>

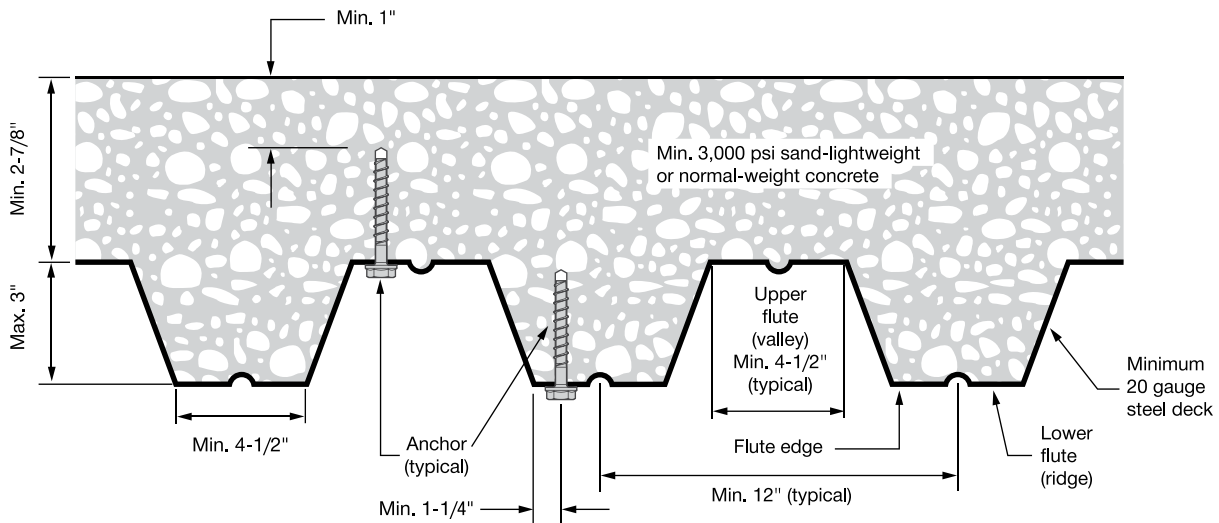

1 Anchors may be placed in the upper or lower flute of the steel deck profile provided the minimum concrete cover above the drilled hole is satisfied. Anchors in the lower flute may be installed with a maximum 1-inch offset in either direction from the center of the flute. The offset distance may be increased proportionally for profiles with lower flute widths greater than those shown provided the minimum lower flute edge distance is also satisfied.

3.3.6

Figure 4 – Installation of Hilti KWIK HUS-EZ on the top of sand-lightweight concrete over metal floor and roof assemblies

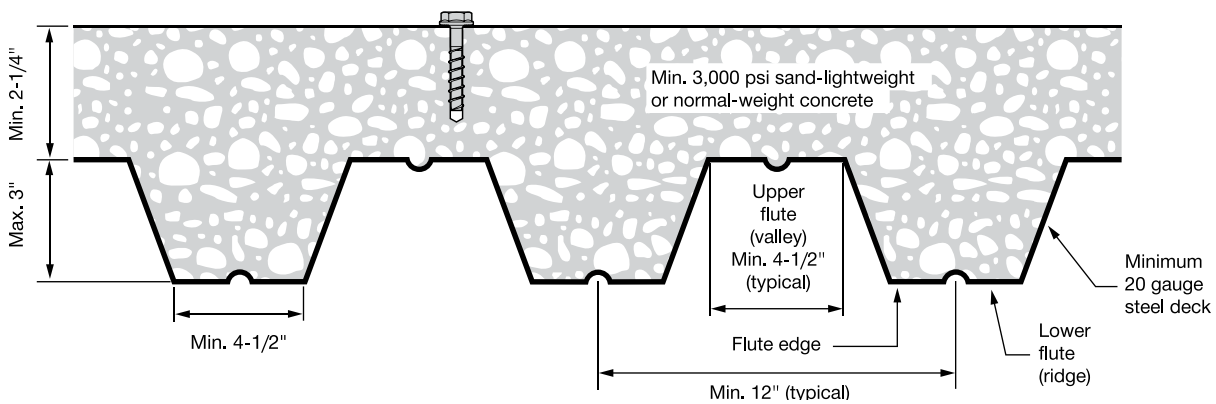

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 18 - Hilti KWIK HUS-EZ in the top of uncracked concrete over metal deck<sup>1,2,3,4,5</sup>**

Nominal anchor diameter in.	Nominal embed. depth in. (mm)	Tension - $\phi N_n$		Shear - $\phi V_n$	
		$f'_c = 3,000$ psi (20.7 MPa) lb (kN)	$f'_c = 4,000$ psi (27.6 MPa) lb (kN)	$f'_c = 3,000$ psi (20.7 MPa) lb (kN)	$f'_c = 4,000$ psi (27.6 MPa) lb (kN)
1/4	1-5/8 (41)	620 (2.8)	675 (3.0)	1,180 (5.2)	1,360 (6.0)
3/8	1-5/8 (41)	1,000 (4.4)	1,155 (5.1)	1,075 (4.8)	1,245 (5.5)

**Table 19 - Hilti KWIK HUS-EZ in the top of cracked concrete over metal deck<sup>1,2,3,4,5</sup>**

Nominal anchor diameter in.	Nominal embed. depth in. (mm)	Tension - $\phi N_n$		Shear - $\phi V_n$	
		$f'_c = 3,000$ psi (20.7 MPa) lb (kN)	$f'_c = 4,000$ psi (27.6 MPa) lb (kN)	$f'_c = 3,000$ psi (20.7 MPa) lb (kN)	$f'_c = 4,000$ psi (27.6 MPa) lb (kN)
1/4	1-5/8 (41)	315 (1.4)	345 (1.5)	835 (3.7)	965 (4.3)
3/8	1-5/8 (41)	520 (2.3)	600 (2.7)	760 (3.4)	880 (3.9)

- 1 See section 3.1.8.6 to convert design strength value to ASD value.
- 2 Linear interpolation between embedment depths and concrete compressive strengths is not permitted.
- 3 Apply spacing, edge distance, and concrete thickness factors in tables 20 and 21 as necessary. Compare to the steel values in table 4. The lesser of the values is to be used for the design.
- 4 Tabular values are for normal weight concrete only. For lightweight concrete multiply design strength by  $\lambda_a$  as follows:  
for sand-lightweight,  $\lambda_a = 0.68$ ; for all-lightweight,  $\lambda_a = 0.60$
- 5 Tabular values are for static loads only. Seismic design is not permitted for uncracked concrete. For seismic tension loads, multiply cracked concrete tabular values in tension by the following reduction factors:  
1/4-inch diameter -  $\alpha_{N,seis} = 0.60$   
3/8-inch diameter -  $\alpha_{N,seis} = 0.75$ .  
No reduction needed for seismic shear. See section 3.1.8.7 for additional information on seismic applications.

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

**Table 20 - Load adjustment factors for Hilti KWIK HUS-EZ in the top of uncracked concrete over metal deck<sup>1,2</sup>**

1/4-in. and 3/8-in. KH-EZ uncracked concrete over metal deck	Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$		
							⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$				
Anchor diameter $d_a$ (in. (mm))	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	
Nominal embed. $h_{nom}$ (in. (mm))	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	
Spacing (s)/edge distance ( $c_e$ )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	0.44	0.58	n/a	n/a	0.44	0.58	0.44	0.58	n/a	n/a
	2 (51)	n/a	n/a	0.50	0.67	n/a	n/a	0.50	0.67	0.50	0.67	n/a	n/a
	2-1/2 (64)	n/a	n/a	0.63	0.83	n/a	n/a	0.63	0.83	0.63	0.83	0.78	0.83
	3 (76)	0.92	0.95	0.75	1.00	0.68	0.71	0.75	1.00	0.75	1.00	0.85	0.91
	3-1/4 (83)	0.96	0.99	0.81		0.70	0.72	0.81		0.81			
	3-1/2 (89)	0.99	1.00	0.88		0.71	0.74	0.88		0.88			
	4 (102)	1.00		1.00		0.74	0.78	1.00		1.00			
	4-1/2 (114)					0.77	0.81						
	5 (127)					0.80	0.84						
	5-1/2 (140)					0.83	0.88						
	6 (152)					0.86	0.91						
	6-1/2 (165)					0.89	0.95						
7 (178)					0.92	0.98							
7-1/2 (191)					0.95	1.00							
8 (203)					0.98								
9 (229)					1.00								

3.3.6

**Table 21 - Load adjustment factors for Hilti KWIK HUS-EZ in the top of cracked concrete over metal deck<sup>1,2</sup>**

1/4-in. and 3/8-in. KH-EZ uncracked concrete over metal deck	Spacing factor in tension $f_{AN}$		Edge distance factor in tension $f_{RN}$		Spacing factor in shear <sup>3</sup> $f_{AV}$		Edge distance in shear				Conc. thickness factor in shear <sup>4</sup> $f_{HV}$		
							⊥ toward edge $f_{RV}$		to and away from edge $f_{RV}$				
Anchor diameter $d_a$ (in. (mm))	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	1/4 (6.4)	3/8 (9.5)	
Nominal embed. $h_{nom}$ (in. (mm))	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	1-5/8 (41)	
Spacing (s)/edge distance ( $c_e$ )/concrete thickness (h) - in. (mm)	1-3/4 (44)	n/a	n/a	0.99	1.00	n/a	n/a	0.51	0.62	0.99	1.00	n/a	n/a
	2 (51)	n/a	n/a	1.00		n/a	n/a	0.62	0.76	1.00		n/a	n/a
	2-1/2 (64)	n/a	n/a			n/a	n/a	0.87	1.00			0.78	0.83
	3 (76)	0.92	0.95			0.68	0.71	1.00				0.85	0.91
	3-1/4 (83)	0.96	0.99			0.70	0.73						
	3-1/2 (89)	0.99	1.00			0.71	0.74						
	4 (102)	1.00				0.74	0.78						
	4-1/2 (114)					0.77	0.81						
	5 (127)					0.80	0.85						
	5-1/2 (140)					0.83	0.88						
	6 (152)					0.86	0.92						
	6-1/2 (165)					0.89	0.95						
7 (178)					0.92	0.98							
7-1/2 (191)					0.95	1.00							
8 (203)					0.98								
9 (229)					1.00								

- Linear interpolation not permitted.
  - When combining multiple load adjustment factors (e.g. for a 4 anchor pattern in a corner with thin concrete member) the design can become very conservative. To optimize the design, use Hilti PROFIS Anchor Design software or perform anchor calculation using design equations from ACI 318-14 Chapter 17.
  - Spacing factor reduction in shear,  $f_{AV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{AV} = f_{AN}$ .
  - Concrete thickness reduction factor in shear,  $f_{HV}$ , assumes an influence of a nearby edge. If no edge exists, then  $f_{HV} = 1.0$ .
- ☐ - For concrete thickness greater than or equal to 3-1/4-inches, the anchor can be designed using either table 2 or table 3 of this section.

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

#### 3.3.6.3.2 Canadian Limit State design

Limit State Design of anchors is described in the provisions of CSA A23.3-14 Annex D for post-installed anchors tested and assessed in accordance with ACI 355.2 for mechanical anchors and ACI 355.4 for adhesive anchors. This section contains the Limit State Design tables with unfactored characteristic loads that are based on the published loads in ICC Evaluation Services ESR-3027. These tables are followed by factored resistance tables. The factored resistance tables have characteristic design loads that are prefactored by the applicable reduction factors for a single anchor with no anchor-to-anchor spacing or edge distance adjustments for the convenience of the user of this document. All the figures in the previous ACI 318-14 Chapter 17 design section are applicable to Limit State Design and the tables will reference these figures.

For a detailed explanation of the tables developed in accordance with CSA A23.3-14 Annex D, refer to Section 3.1.8. Technical assistance is available by contacting Hilti Canada at (800) 363-4458 or at [www.hilti.com](http://www.hilti.com).

**Table 22 - Steel resistance for Hilti KWIK HUS-EZ carbon steel screw anchor<sup>1,2</sup>**

Nominal anchor diameter in.	Nominal embedment in. (mm)		Tensile $N_{sar}^3$ lb (kN)	Shear $V_{sar}^4$ lb (kN)	Seismic shear $V_{sar,eq}^5$ lb (kN)	
1/4	1-5/8 (41)	2-1/2 (64)	3,370 (15.0)	855 (3.8)	770 (3.4)	
3/8	1-5/8 (41)		5,475 (24.4)	2,025 (9.0)	2,025 (9.0)	
	2-1/2 (64)	3-1/4 (83)	6,150 (27.4)	2,865 (12.7)	1,720 (7.7)	
1/2	2-1/4 (57)	3 (76)	4-1/4 (108)	10,780 (48.0)	5,110 (22.7)	3,065 (13.6)
5/8	3-1/4 (83)	5 (127)	14,405 (64.1)	6,200 (27.6)	3,720 (16.5)	
3/4	4 (102)	6-1/4 (159)	19,050 (84.7)	9,205 (40.9)	6,385 (28.4)	

1 See section 3.1.8.6 to convert design strength value to ASD value.

2 Hilti KWIK HUS-EZ carbon steel screw anchors are to be considered brittle steel elements.

3 Tensile  $N_{sar} = A_{se,N} \phi_s f_{uta} R$  as noted in CSA A23.3-14 Annex D.

4 Shear determined by static shear tests with  $V_{sar} < A_{se,V} \phi_s 0.6 f_{uta} R$  as noted in CSA A23.3-14 Annex D.

5 Seismic shear values determined by seismic shear tests with  $V_{sar,eq} < A_{se,V} \phi_s 0.6 f_{uta} R$  as noted in CSA A23.3-14 Annex D. See section 3.1.8.7 for additional information on seismic applications.

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

**Table 23 - Hilti KWIK HUS-EZ design information in accordance with CSA A23.3-14 Annex D<sup>1</sup>**


Design parameter	Symbol	Units	Nominal anchor diameter												Ref A23.3-14	
			1/4		3/8			1/2			5/8		3/4			
Nominal anchor diameter	$d_a$	in. (mm)	0.25 (6.4)		0.375 (9.5)			0.5 (12.7)			0.625 (15.9)		0.75 (19.1)			
Effective embedment <sup>2</sup>	$h_{ef}$	in. (mm)	1.18 (30)	1.92 (49)	1.11 (28)	1.86 (47)	2.50 (64)	1.52 (39)	2.16 (55)	3.22 (82)	2.39 (61)	3.88 (99)	2.92 (74)	4.84 (123)		
Min. nominal embedment <sup>2</sup>	$h_{nom}$	in. (mm)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)	3-1/4 (83)	2-1/4 (57)	3 (76)	4-1/4 (108)	3-1/4 (83)	5 (127)	4 (102)	6-1/4 (159)		
Minimum concrete thickness <sup>3</sup>	$h_{min}$	in. (mm)	3-1/4 (83)	4-1/8 (105)	3-1/4 (83)	4 (102)	4-3/4 (121)	4-1/2 (114)	4-3/4 (121)	6-3/4 (171)	5 (127)	7 (178)	6 (152)	8-1/8 (206)		
Critical edge distance	$c_{ac}$	in. (mm)	2 (51)	2.78 (71)	2.63 (67)	2.92 (74)	3.75 (95)	2.75 (70)	3.75 (95)	5.25 (133)	3.63 (92)	5.82 (148)	4.41 (112)	7.28 (185)		
Minimum spacing at critical edge distance	$s_{min,cac}$	in. (mm)	1.5 (38)			2.25 (57)			3 (76)							
Minimum edge distance	$c_{min}$	in. (mm)	1.50 (38)						1.75 (44)							
Minimum anchor spacing at minimum edge distance	for $s >$	in. (mm)	3.0 (76)									4 (102)				
Minimum hole depth in concrete	$h_0$	in. (mm)	2 (51)	2-7/8 (73)	1-7/8 (48)	2-3/4 (70)	3-1/2 (89)	2-5/8 (67)	3-3/8 (86)	4-5/8 (117)	3-5/8 (92)	5-3/8 (137)	4-3/8 (111)	6-5/8 (168)		
Minimum specified ultimate strength	$f_{uta}$	psi (N/mm <sup>2</sup> )	125,000 (860)		106,975 (738)	120,300 (829)		112,540 (776)			90,180 (622)		81,600 (563)			
Effective tensile stress area	$A_{se,N}$	in <sup>2</sup> (mm <sup>2</sup> )	0.045 (29.0)		0.086 (55.5)			0.161 (103.9)			0.268 (172.9)		0.392 (252.9)			
Steel embed. material resistance factor for reinforcement	$\phi_s$	-	0.85												8.4.3	
Resistance modification factor for tension, steel failure modes <sup>4</sup>	R	-	0.70												D.5.3	
Resistance modification factor for shear, steel failure modes <sup>4</sup>	R	-	0.65												D.5.3	
Factored steel resistance in tension	$N_{sar}$	lb (kN)	3,370 (15.0)		5,475 (24.4)	6,150 (27.4)		10,780 (48.0)			14,405 (64.1)		19,050 (84.7)		D.6.1.2	
Factored steel resistance in shear	$V_{sar}$	lb (kN)	855 (3.8)		2,030 (9.0)	2,865 (12.7)		5,110 (22.7)			6,200 (27.6)		9,205 (40.9)		D.7.1.2	
Factored steel resistance in shear, seismic	$V_{sar,eq}$	lb (kN)	770 (3.4)		2,030 (9.0)	1,720 (7.7)		3,065 (13.6)			3,720 (16.5)		6,385 (28.4)			
Coeff. for factored conc. breakout resistance, uncracked concrete	$k_{c,uncr}$	lb	10						11.25						D.6.2.2	
Coeff. for factored conc. breakout resistance, cracked concrete	$k_{c,cr}$	-	7												D.6.2.2	
Modification factor for anchor resistance, tension, uncracked concrete <sup>5</sup>	$\psi_{c,N}$	-	1.0												D.6.2.6	
Anchor category	-	-	3			1									D.5.3 (c)	
Concrete material resistance factor	$\phi_c$	-	0.65												8.4.2	
Resistance modification factor for tension and shear, concrete failure modes, Condition B <sup>6</sup>	R	-	0.75			1.00									D.5.3 (c)	
Factored pullout resistance in 20 MPa uncracked concrete <sup>7</sup>	$N_{pr,uncr}$	lb (kN)	675 (3.0)	1640 (7.3)	NA										D.6.3.2	
Factored pullout resistance in 20 MPa cracked concrete <sup>7</sup>	$N_{pr,cr}$	lb (kN)	340 (1.5)	810 (3.6)	515 (2.3)	NA									D.6.3.2	
Factored seismic pullout resistance in 20 MPa cracked concrete <sup>7</sup>	$N_{pr,eq}$	lb (kN)	275 (1.2)	810 (3.6)	515 (2.3)	NA									D.6.3.2	


**3.3.6**

- Design information in this table is taken from ICC-ES ESR-3027, dated February, 2016, tables 2, 3, and 4, and converted for use with CSA A23.3-14 Annex D.
- See figure 1 of this section.
- For concrete over metal deck applications where the concrete thickness over the top flute is less than  $h_{min}$  in this table, see figure 4 and tables 28 and 29 of this section.
- The KWIK HUS-EZ is considered a brittle steel element as defined by CSA A23.3-14 Annex D section D.2.
- For all design cases,  $\psi_{c,N} = 1.0$ . The appropriate coefficient for breakout resistance for cracked concrete ( $k_{c,cr}$ ) or uncracked concrete ( $k_{c,uncr}$ ) must be used.
- For use with the load combinations of CSA A23.3-14 chapter 8. Condition B applies where supplementary reinforcement in conformance with CSA A23.3-14 section D.5.3 is not provided, or where pullout or pryout strength governs. For cases where the presence of supplementary reinforcement can be verified, the resistance modification factors associated with Condition A may be used.
- For all design cases,  $\psi_{c,p} = 1.0$ . NA (not applicable) denotes that this value does not control for design. See section 4.1.4 of ESR-3027 for additional information.



### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 24 - Hilti KWIK HUS-EZ carbon steel screw anchor factored resistance with concrete/pullout failure in uncracked concrete<sup>1,2,3,4,5</sup>**



Nominal anchor diameter in.	Effective embed. in. (mm)	Nominal embed. in. (mm)	Tension - $N_t$				Shear - $V_r$			
			$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 25$ MPa (3,625 psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)	$f'_c = 40$ MPa (5,800 psi) lb (kN)	$f'_c = 20$ MPa (2,900 psi) lb (kN)	$f'_c = 25$ MPa (3,625 psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)	$f'_c = 40$ MPa (5,800 psi) lb (kN)
1/4	1.18 (30)	1-5/8 (41)	665 (3.0)	710 (3.2)	750 (3.3)	820 (3.6)	805 (3.6)	900 (4.0)	985 (4.4)	1,135 (5.1)
	1.92 (49)	2-1/2 (64)	1,645 (7.3)	1,840 (8.2)	2,015 (9.0)	2,325 (10.4)	2,225 (9.9)	2,490 (11.1)	2,725 (12.1)	3,145 (14.0)
3/8	1.11 (28)	1-5/8 (41)	980 (4.4)	1,095 (4.9)	1,200 (5.3)	1,385 (6.2)	980 (4.4)	1,095 (4.9)	1,200 (5.3)	1,385 (6.2)
	1.86 (47)	2-1/2 (64)	2,120 (9.4)	2,375 (10.6)	2,600 (11.6)	3,000 (13.3)	2,120 (9.4)	2,375 (10.6)	2,600 (11.6)	3,000 (13.3)
	2.50 (64)	3-1/4 (83)	3,305 (14.7)	3,695 (16.4)	4,050 (18.0)	4,675 (20.8)	3,305 (14.7)	3,695 (16.4)	4,050 (18.0)	4,675 (20.8)
1/2	1.52 (39)	2-1/4 (57)	1,765 (7.8)	1,970 (8.8)	2,160 (9.6)	2,495 (11.1)	1,765 (7.8)	1,970 (8.8)	2,160 (9.6)	2,495 (11.1)
	2.16 (55)	3 (76)	2,990 (13.3)	3,340 (14.9)	3,660 (16.3)	4,225 (18.8)	2,990 (13.3)	3,340 (14.9)	3,660 (16.3)	4,225 (18.8)
	3.22 (82)	4-1/4 (108)	5,440 (24.2)	6,080 (27.0)	6,660 (29.6)	7,690 (34.2)	10,875 (48.4)	12,160 (54.1)	13,320 (59.3)	15,380 (68.4)
5/8	2.39 (61)	3-1/4 (83)	3,475 (15.5)	3,890 (17.3)	4,260 (18.9)	4,920 (21.9)	3,475 (15.5)	3,890 (17.3)	4,260 (18.9)	4,920 (21.9)
	3.88 (99)	5 (127)	7,195 (32.0)	8,040 (35.8)	8,810 (39.2)	10,170 (45.2)	14,385 (64.0)	16,085 (71.5)	17,620 (78.4)	20,345 (90.5)
3/4	2.92 (74)	4 (102)	4,695 (20.9)	5,250 (23.4)	5,750 (25.6)	6,640 (29.5)	9,390 (41.8)	10,500 (46.7)	11,505 (51.2)	13,280 (59.1)
	4.84 (123)	6-1/4 (159)	10,020 (44.6)	11,205 (49.8)	12,275 (54.6)	14,170 (63.0)	20,040 (89.2)	22,410 (99.7)	24,545 (109.2)	28,345 (126.1)

**Table 25 - Hilti KWIK HUS-EZ carbon steel screw anchor factored resistance with concrete/pullout failure in cracked concrete<sup>1,2,3,4,5</sup>**



Nominal anchor diameter in.	Effective embed. in. (mm)	Nominal embed. in. (mm)	Tension - $N_t$				Shear - $V_r$			
			$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 25$ MPa (3,625 psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)	$f'_c = 40$ MPa (5,800 psi) lb (kN)	$f'_c = 20$ MPa (2,900 psi) lb (kN)	$f'_c = 25$ MPa (3,625 psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)	$f'_c = 40$ MPa (5,800 psi) lb (kN)
1/4	1.18 (30)	1-5/8 (41)	340 (1.5)	360 (1.6)	385 (1.7)	415 (1.9)	565 (2.5)	630 (2.8)	690 (3.1)	795 (3.5)
	1.92 (49)	2-1/2 (64)	815 (3.6)	910 (4.1)	1,000 (4.4)	1,155 (5.1)	1,560 (6.9)	1,740 (7.7)	1,910 (8.5)	2,205 (9.8)
3/8	1.11 (28)	1-5/8 (41)	510 (2.3)	570 (2.5)	620 (2.8)	720 (3.2)	685 (3.0)	765 (3.4)	840 (3.7)	970 (4.3)
	1.86 (47)	2-1/2 (64)	1,485 (6.6)	1,660 (7.4)	1,820 (8.1)	2,100 (9.3)	1,485 (6.6)	1,660 (7.4)	1,820 (8.1)	2,100 (9.3)
	2.50 (64)	3-1/4 (83)	2,315 (10.3)	2,590 (11.5)	2,835 (12.6)	3,275 (14.6)	2,315 (10.3)	2,590 (11.5)	2,835 (12.6)	3,275 (14.6)
1/2	1.52 (39)	2-1/4 (57)	1,095 (4.9)	1,225 (5.5)	1,345 (6.0)	1,550 (6.9)	1,095 (4.9)	1,225 (5.5)	1,345 (6.0)	1,550 (6.9)
	2.16 (55)	3 (76)	1,860 (8.3)	2,080 (9.2)	2,275 (10.1)	2,630 (11.7)	1,860 (8.3)	2,080 (9.2)	2,275 (10.1)	2,630 (11.7)
	3.22 (82)	4-1/4 (108)	3,385 (15.1)	3,785 (16.8)	4,145 (18.4)	4,785 (21.3)	6,765 (30.1)	7,565 (33.7)	8,290 (36.9)	9,570 (42.6)
5/8	2.39 (61)	3-1/4 (83)	2,165 (9.6)	2,420 (10.8)	2,650 (11.8)	3,060 (13.6)	2,165 (9.6)	2,420 (10.8)	2,650 (11.8)	3,060 (13.6)
	3.88 (99)	5 (127)	4,475 (19.9)	5,005 (22.3)	5,480 (24.4)	6,330 (28.2)	8,950 (39.8)	10,005 (44.5)	10,965 (48.8)	12,660 (56.3)
3/4	2.92 (74)	4 (102)	2,920 (13.0)	3,265 (14.5)	3,580 (15.9)	4,130 (18.4)	5,845 (26.0)	6,535 (29.1)	7,155 (31.8)	8,265 (36.8)
	4.84 (123)	6-1/4 (159)	6,235 (27.7)	6,970 (31.0)	7,635 (34.0)	8,820 (39.2)	12,470 (55.5)	13,945 (62.0)	15,275 (67.9)	17,635 (78.4)

- 1 See section 3.1.8.6 to convert factored resistance value to ASD value.
- 2 Linear interpolation between embedment depths and concrete compressive strengths is not permitted.
- 3 Apply spacing, edge distance, and concrete thickness factors in tables 6 to 15 as necessary. Compare to the steel values in table 22. The lesser of the values is to be used for the design.
- 4 Tabular values are for normal-weight concrete only. For lightweight concrete multiply design strength by  $\lambda_a$  as follows: for sand-lightweight,  $\lambda_a = 0.68$ ; for all-lightweight,  $\lambda_a = 0.60$
- 5 Tabular values are for static loads only. Seismic design is not permitted for uncracked concrete. For seismic tension loads, multiply cracked concrete tabular values in tension by the following reduction factors:  
 1/4-in diameter by 1-5/8-in nominal embedment depth -  $\alpha_{N,seis} = 0.60$   
 All other sizes -  $\alpha_{N,seis} = 0.75$   
 No reduction needed for seismic shear. See section 3.1.8.7 for additional information on seismic applications.

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

**Table 26 - Hilti KWIK HUS-EZ in the soffit of uncracked lightweight concrete over metal deck<sup>1,2,3,4,5,6,7</sup>**


Nominal anchor diameter in.	Nominal embedment in. (mm)	Installation in lower flute				Installation in upper flute			
		Tension - $N_r$		Shear - $V_r$		Tension - $N_r$		Shear - $V_r$	
		$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)	$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)	$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)	$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)
1/4	1-5/8 (41)	585 (2.6)	660 (2.9)	665 (3.0)	665 (3.0)	720 (3.2)	810 (3.6)	665 (3.0)	665 (3.0)
	2-1/2 (64)	1,200 (5.3)	1,470 (6.5)	1,220 (5.4)	1,220 (5.4)	1,255 (5.6)	1,535 (6.8)	1,805 (8.0)	1,805 (8.0)
3/8	1-5/8 (41)	830 (3.7)	1,020 (4.5)	835 (3.7)	835 (3.7)	950 (4.2)	1,165 (5.2)	2,030 (9.0)	2,030 (9.0)
	2-1/2 (64)	1,430 (6.4)	1,755 (7.8)	835 (3.7)	835 (3.7)	1,865 (8.3)	2,285 (10.2)	3,365 (15.0)	3,365 (15.0)
	3-1/4 (83)	2,505 (11.1)	3,070 (13.7)	1,990 (8.9)	1,990 (8.9)	n/a	n/a	n/a	n/a
1/2	2-1/4 (57)	835 (3.7)	1,020 (4.5)	885 (3.9)	885 (3.9)	890 (4.0)	1,090 (4.8)	4,335 (19.3)	4,335 (19.3)
	3 (76)	1,955 (8.7)	2,395 (10.7)	1,615 (7.2)	1,615 (7.2)	n/a	n/a	n/a	n/a
	4-1/4 (108)	3,425 (15.2)	4,195 (18.7)	1,985 (8.8)	1,985 (8.8)	n/a	n/a	n/a	n/a
5/8	3-1/4 (83)	2,670 (11.9)	3,270 (14.5)	1,915 (8.5)	1,915 (8.5)	n/a	n/a	n/a	n/a
	5 (127)	6,070 (27.0)	7,430 (33.1)	2,315 (10.3)	2,315 (10.3)	n/a	n/a	n/a	n/a
3/4	4 (102)	2,670 (11.9)	3,270 (14.5)	2,075 (9.2)	2,075 (9.2)	n/a	n/a	n/a	n/a


**3.3.6**
**Table 27 - Hilti KWIK HUS-EZ in the soffit of cracked lightweight concrete over metal deck<sup>1,2,3,4,5,6,7,8</sup>**


Nominal anchor diameter in.	Nominal embedment in. (mm)	Installation in lower flute				Installation in upper flute			
		Tension - $N_r$		Shear - $V_r$		Tension - $N_r$		Shear - $V_r$	
		$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)	$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)	$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)	$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350psi) lb (kN)
1/4	1-5/8 (41)	300 (1.3)	340 (1.5)	665 (3.0)	665 (3.0)	365 (1.6)	445 (2.0)	665 (3.0)	665 (3.0)
	2-1/2 (64)	595 (2.6)	730 (3.2)	1,220 (5.4)	1,220 (5.4)	625 (2.8)	765 (3.4)	1,805 (8.0)	1,805 (8.0)
3/8	1-5/8 (41)	520 (2.3)	635 (2.8)	835 (3.7)	835 (3.7)	755 (3.4)	930 (4.1)	2,030 (9.0)	2,030 (9.0)
	2-1/2 (64)	1,015 (4.5)	1,245 (5.5)	835 (3.7)	835 (3.7)	1,325 (5.9)	1,620 (7.2)	3,365 (15.0)	3,365 (15.0)
	3-1/4 (83)	1,775 (7.9)	2,175 (9.7)	1,990 (8.9)	1,990 (8.9)	n/a	n/a	n/a	n/a
1/2	2-1/4 (57)	525 (2.3)	640 (2.8)	885 (3.9)	885 (3.9)	630 (2.8)	770 (3.4)	4,335 (19.3)	4,335 (19.3)
	3 (76)	1,235 (5.5)	1,510 (6.7)	1,615 (7.2)	1,615 (7.2)	n/a	n/a	n/a	n/a
	4-1/4 (108)	2,155 (9.6)	2,640 (11.7)	1,985 (8.8)	1,985 (8.8)	n/a	n/a	n/a	n/a
5/8	3-1/4 (83)	1,680 (7.5)	2,060 (9.2)	1,915 (8.5)	1,915 (8.5)	n/a	n/a	n/a	n/a
	5 (127)	3,820 (17.0)	4,680 (20.8)	2,315 (10.3)	2,315 (10.3)	n/a	n/a	n/a	n/a
3/4	4 (102)	1,680 (7.5)	2,060 (9.2)	2,075 (9.2)	2,075 (9.2)	n/a	n/a	n/a	n/a

- See section 3.1.8.6 to convert design strength value to ASD value.
- Linear interpolation between embedment depths and concrete compressive strengths is not permitted.
- Tabular value is for one anchor per flute. Minimum spacing along the length of the flute is  $3 \times h_{nom}$  (nominal embedment).
- Tabular values are lightweight concrete and no additional reduction factor is needed.
- No additional reduction factors for spacing or edge distance need to be applied.
- Comparison of the tabular values to the steel strength is not necessary. Tabular values control.
- Tabular values are for static loads only. Seismic design is not permitted for uncracked concrete. For seismic tension loads, multiply cracked concrete tabular values in tension by the following reduction factors:  
 1/4-in diameter by 1-5/8-in nominal embedment depth -  $\alpha_{N,seis} = 0.60$   
 All other sizes -  $\alpha_{N,seis} = 0.75$ .  
 See section 3.1.8.7 for additional information on seismic applications.
- For the following anchor sizes, an additional factor for seismic shear must be applied to the cracked concrete tabular values for seismic conditions:  
 1/4-inch diameter -  $\alpha_{V,seis} = 0.75$   
 3/8-inch diameter -  $\alpha_{V,seis} = 0.60$   
 1/2-inch diameter -  $\alpha_{V,seis} = 0.60$   
 5/8-inch diameter -  $\alpha_{V,seis} = 0.60$   
 3/4-inch diameter -  $\alpha_{V,seis} = 0.70$

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 28 - Hilti KWIK HUS-EZ carbon steel screw anchor factored resistance**   
 in the top of uncracked concrete over metal deck<sup>1,2,3,4,5</sup>

Nominal anchor diameter in.	Effective embed. in. (mm)	Nominal embed. in. (mm)	Tension - $N_r$		Shear - $V_r$	
			$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)	$f'_c = 20$ MPa (2,900 psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)
1/4	1.18 (30)	1-5/8 (41)	665 (3.0)	750 (3.3)	805 (3.6)	985 (4.4)
3/8	1.11 (28)	1-5/8 (41)	980 (4.4)	1,200 (5.3)	980 (4.4)	1,200 (5.3)

**Table 29 - Hilti KWIK HUS-EZ carbon steel screw anchor factored resistance**   
 in the top of cracked concrete over metal deck<sup>1,2,3,4,5</sup>

Nominal anchor diameter in.	Effective embed. in. (mm)	Nominal embed. in. (mm)	Tension - $N_r$		Shear - $V_r$	
			$f'_c = 20$ MPa (2,900psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)	$f'_c = 20$ MPa (2,900 psi) lb (kN)	$f'_c = 30$ MPa (4,350 psi) lb (kN)
1/4	1.18 (30)	1-5/8 (41)	340 (1.5)	385 (1.7)	565 (2.5)	690 (3.1)
3/8	1.11 (28)	1-5/8 (41)	510 (2.3)	620 (2.8)	685 (3.0)	840 (3.7)

- 1 See Section 3.1.8.6 to convert design strength value to ASD value.
- 2 Linear interpolation between embedment depths and concrete compressive strengths is not permitted.
- 3 Apply spacing, edge distance, and concrete thickness factors in tables 20 and 21 as necessary. Compare to the steel values in table 22. The lesser of the values is to be used for the design.
- 4 Tabular values are for normal-weight concrete only. For lightweight concrete multiply design strength by  $\lambda_a$  as follows:  
for sand-lightweight,  $\lambda_a = 0.68$ ; for all-lightweight,  $\lambda_a = 0.60$
- 5 Tabular values are for static loads only. Seismic design is not permitted for uncracked concrete. For seismic tension loads, multiply cracked concrete tabular values in tension by the following reduction factors:  
1/4-inch diameter -  $\alpha_{N,seis} = 0.60$   
3/8-inch diameter -  $\alpha_{N,seis} = 0.75$ .  
No reduction needed for seismic shear. See section 3.1.8.7 for additional information on seismic applications.

## KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

### 3.3.6.3.3 Allowable Stress Design for masonry

**Table 30 – Allowable tension loads for Hilti KWIK HUS-EZ installed in grout-filled masonry walls (lb)<sup>1,2,3,4,5</sup>**

Nominal anchor diameter in.	Embedment in. <sup>6</sup>	Loads @ c <sub>cr</sub> and s <sub>cr</sub>	Spacing			Edge distance
			Critical - s <sub>cr</sub> in. <sup>7</sup>	Minimum - s <sub>min</sub> in. <sup>7</sup>	Load reduction factor at s <sub>min</sub> <sup>8</sup>	Critical - c <sub>cr</sub> in. <sup>9</sup>
1/4	1-5/8 <sup>10</sup>	530	4	2	0.70	4
	2-1/2 <sup>11</sup>	910		4	1.00	
3/8	1-5/8 <sup>11</sup>	535	4	2	0.70	4
	2-1/2	895	6	4	0.80	
	3-1/4	1,210				
1/2	2-1/4	710	4	2	0.60	4
	3	1,110	8	4		
	4-1/4	1,515				
5/8	3-1/4	1,155	10	4	0.60	4
	5	1,735				
3/4	4	1,680	12	4	0.60	4
	6-1/4	2,035				

**3.3.6**
**Table 31 – Allowable shear loads for Hilti KWIK HUS-EZ installed in grout-filled masonry walls (lb)<sup>1,2,3,4,5</sup>**

Nominal anchor diameter in.	Embedment in. <sup>6</sup>	Load at c <sub>cr</sub> and s <sub>cr</sub>	Spacing			Edge distance			
			Critical - s <sub>cr</sub> in. <sup>7</sup>	Minimum - s <sub>min</sub> in. <sup>7</sup>	Load reduction factor at s <sub>min</sub> <sup>8</sup>	Critical - c <sub>cr</sub> in. <sup>9</sup>	Minimum - c <sub>min</sub> in. <sup>9</sup>	Load reduction factor at c <sub>min</sub>	
								perpendicular to edge	parallel to edge
1/4	1-5/8	675	4	4	1.00	4	4	1.00	1.00
	2-1/2	840						1.00	1.00
3/8	1-5/8	1,140	6	4	0.94	6	4	0.61	1.00
	2-1/2	1,165						0.70	1.00
	3-1/4	1,190						0.70	1.00
1/2	2-1/4	1,845	8	4	0.88	8	4	0.50	1.00
	3	2,055						0.45	0.94
	4-1/4	2,745						0.40	0.89
5/8	3-1/4	3,040	10	4	0.36	10	4	0.36	0.82
	5	3,485						0.34	0.92
3/4	4	3,040	10	4	0.36	10	4	0.36	0.82
	6-1/4	3,485						0.34	0.92

- All values are for anchors installed in fully grouted masonry with minimum masonry prism strength of 1,500 psi. Concrete masonry units may be lightweight, medium-weight or normal-weight.
- Anchors may not be installed within one inch in any direction of a vertical joint.
- Linear interpolation of load values between minimum spacing s<sub>min</sub> and critical spacing s<sub>cr</sub> and between minimum edge distance c<sub>min</sub> and critical edge distance c<sub>cr</sub> is permitted.
- For combined loading: For 1/4-in. -  $\frac{T_{\text{applied}}}{T_{\text{allowable}}} + \frac{V_{\text{applied}}}{V_{\text{allowable}}} \leq 1$  For 3/8- through 3/4-in. -  $\left(\frac{T_{\text{applied}}}{T_{\text{allowable}}}\right)^{5/3} + \left(\frac{V_{\text{applied}}}{V_{\text{allowable}}}\right)^{5/3} \leq 1$
- See figure 5 for anchor locations.
- Embedment depth is measured from the outside face of the concrete masonry embedment.
- Critical spacing s<sub>cr</sub> is the anchor spacing where full load values may be used. The minimum spacing s<sub>min</sub> is the minimum spacing for which values are available and installation is recommended. Spacing is measured from the center of one anchor to the center of the adjacent anchor.
- Load reduction factors are multiplicative, both spacing and edge distance load reduction factors must be considered. Load values for anchors installed at less than c<sub>cr</sub> or s<sub>cr</sub> must be multiplied by the appropriate load reduction factor based on actual edge distance (c) or spacing (s).
- The critical edge distance c<sub>cr</sub> is the edge distance where full load values may be used. The minimum edge distance c<sub>min</sub> is the minimum edge distance for which values are available and installation is recommended. For tension, c<sub>cr</sub> equals c<sub>min</sub>. Edge distance is measured from the center of the anchor to the closest edge.
- Load values must be reduced by 21% for installations within 1-1/4 inches of the bed joint.
- Load values must be reduced by 13% for installations within 1-1/4 inches of the bed joint.

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

**Table 32 – Hilti KWIK HUS-EZ allowable loads installed in top-of-grout-filled concrete masonry walls or horizontal members of wall openings<sup>1,2,3</sup>**

Nominal anchor diameter in.	Minimum embedment depth in.	Edge distance <sup>4</sup> in.	Critical spacing <sup>5</sup> in.	Minimum end distance <sup>6</sup> in.	Tension lb	Shear lb	
						Load direction	
						Parallel to edge of masonry wall	Perpendicular to edge of masonry wall
1/4	1 5/8	1 1/2	4	4	205	180	135
		3 3/4			205	275	275
	2 1/2	1 1/2			355	345	155
		3 3/4			390	415	330
3/8	1 5/8	1 1/2	6	6	245	345	175
		3 3/4			245	345	345
	3 1/4	1 1/2			465	490	200
		3 3/4			540	800	625
1/2	2 1/4	1 3/4	8	8	390	460	200
		3 3/4			610	525	500
	4 1/4	1 3/4			540	885	245
		3 3/4			750	1275	550
5/8	5	1 3/4	10	10	975	930	245
		3 3/4			975	2190	630
3/4	6 1/4	3 3/4	12	12	975	2430	630

**Table 33 – Hilti KWIK HUS-EZ allowable loads installed in end-of-wall or vertical members of wall openings<sup>1,2,3</sup>**

Nominal anchor diameter in.	Minimum embedment depth in.	Edge distance <sup>4</sup> in.	Critical spacing <sup>5</sup> in.	Minimum end distance <sup>6</sup> in.	Tension lb	Shear lb	
						Load direction	
						Parallel to edge of masonry wall	Perpendicular to edge of masonry wall
1/4	1 5/8	1 1/2	4	4	360	525	205
		3 3/4			380	595	585
	2 1/2	1 1/2			590	610	225
		3 3/4			755	635	585
3/8	1 5/8	1 1/2	6	6	355	725	215
		3 3/4			465	1010	825
	3 1/4	1 1/2			565	875	240
		3 3/4			1020	1195	1050
1/2	2 1/4	1 3/4	8	8	500	855	260
		3 3/4			525	1100	1050
	4 1/4	1 3/4			650	925	280
		3 3/4			1150	1240	1050
5/8	5	3 3/4	10	10	1605	2215	1050
3/4	6 1/4	3 3/4	12	12	1865	2550	1050

1 All values are for anchors installed in fully grouted concrete masonry with minimum masonry prism strength of 1,500 psi. Concrete masonry units may be lightweight, medium-weight or normal-weight conforming to ASTM C90. Allowable loads are calculated using safety factor of 5.

2 See figure 6 and 7 for allowable anchor installation locations on the top of grout-filled concrete masonry walls. Anchors may not be installed within one inch of a vertical joint. See figure 7 for anchor installation locations in end-of-wall and vertical members of wall openings.


3 Anchors may not be installed within one inch in any direction of a vertical joint.

4 For load values at edge distances between listed values linear interpolation is permitted.

5 Critical spacing equals minimum spacing.

6 Minimum end distance applicable to top-of-wall and end-of-wall and does not apply for wall openings such as windows.


# KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor 3.3.6

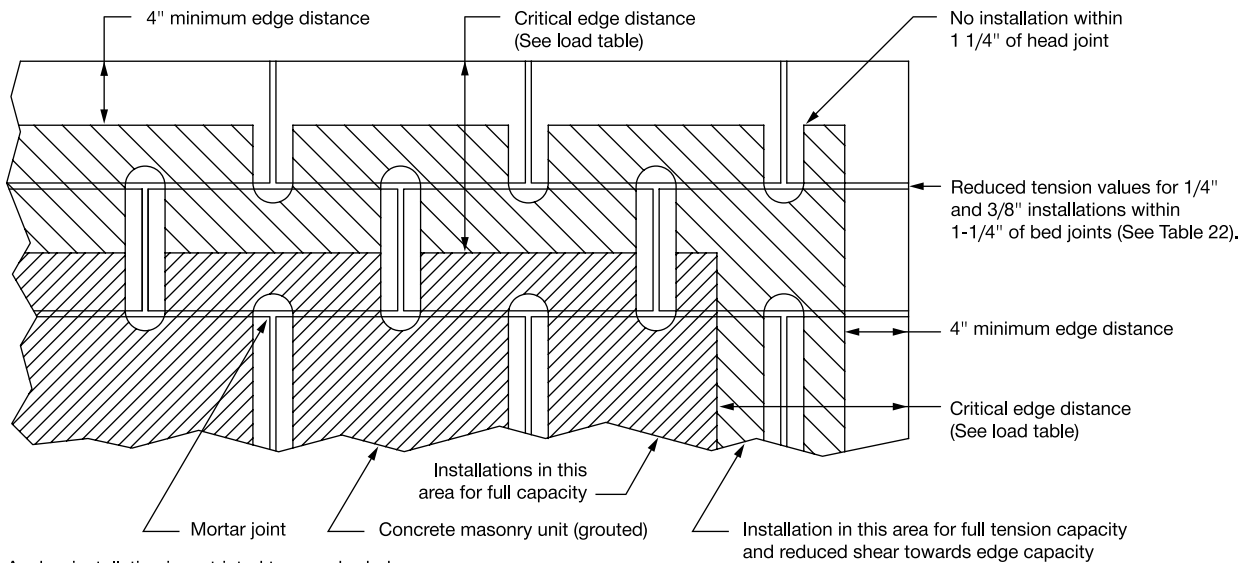


Anchor installation is restricted to non-shaded areas

**Figure 5 – Acceptable locations (shaded areas) for Hilti KWIK HUS-EZ anchors in grout-filled concrete masonry**

3.3.6

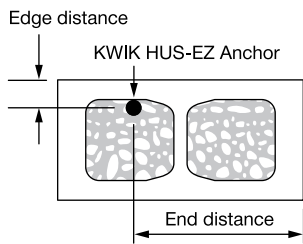

**Figure 6 – Edge and end distances for the Hilti KWIK HUS-EZ anchor installed in the top of CMU masonry wall construction**

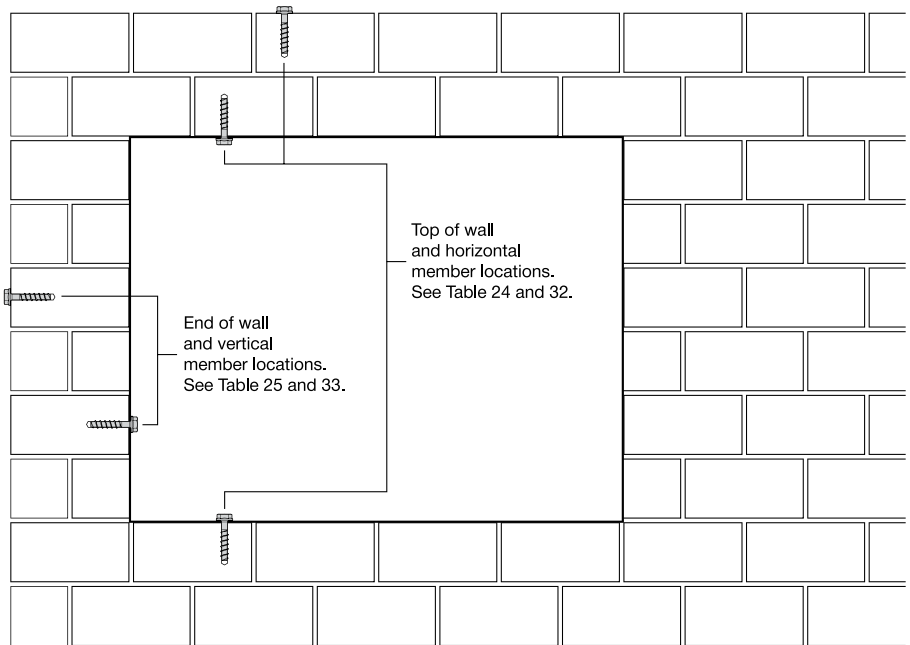

**Figure 7 – Anchor locations in end of wall or wall opening applications**

### 3.3.6 KWIK HUS-EZ (KH-EZ) Carbon Steel Screw Anchor

#### 3.3.6.4 Installation instructions

Installation Instructions For Use (IFU) are included with each product package. They can also be viewed or downloaded online at [www.hilti.com](http://www.hilti.com). Because of the possibility of changes, always verify that downloaded IFU are current when used. Proper installation is critical to achieve full performance. Training is available on request. Contact Hilti Technical Services for applications and conditions not addressed in the IFU.

#### 3.3.6.5 Ordering Information



#### Order Information

Description	Hole Diameter	Total Length without Anchor Head	Minimum Embedment Depth	Qty (pcs) / Box
KH-EZ 1/4"x1-7/8"	1/4"	1-7/8"	1-5/8"	100
KH-EZ 1/4"x2-5/8"	1/4"	2-5/8"	2-1/2"	100
KH-EZ 1/4"x3"	1/4"	3"	2-1/2"	100
KH-EZ 1/4"x3-1/2"	1/4"	3-1/2"	2-1/2"	100
KH-EZ 1/4"x4"	1/4"	4"	2-1/2"	100
KH-EZ 3/8"x1-7/8"	3/8"	1-7/8"	1-5/8"	50
KH-EZ 3/8"x2-1/8"	3/8"	2-1/8"	1-5/8"	50
KH-EZ 3/8"x3"	3/8"	3"	2-1/2"	50
KH-EZ 3/8"x3-1/2"	3/8"	3-1/2"	2-1/2"	50
KH-EZ 3/8"x4"	3/8"	4"	3-1/4"	50
KH-EZ 3/8"x5"	3/8"	5"	3-1/4"	30
KH-EZ 1/2"x2-1/2"	1/2"	2-1/2"	2-1/4"	30
KH-EZ 1/2"x3"	1/2"	3"	2-1/4"	30
KH-EZ 1/2"x3-1/2"	1/2"	3-1/2"	3"	25
KH-EZ 1/2"x4"	1/2"	4"	3"	25
KH-EZ 1/2"x4-1/2"	1/2"	4-1/2"	4 1/4"	25
KH-EZ 1/2"x5"	1/2"	5"	4 1/4"	25
KH-EZ 1/2"x6"	1/2"	6"	4-1/4"	25
KH-EZ 5/8"x3-1/2"	5/8"	3-1/2"	3-1/4"	15
KH-EZ 5/8"x4"	5/8"	4"	3-1/4"	15
KH-EZ 5/8"x5-1/2"	5/8"	5-1/2"	3-1/4"	15
KH-EZ 5/8"x6-1/2"	5/8"	6-1/2"	3-1/4"	15
KH-EZ 5/8"x8"	5/8"	8"	3-1/4"	15
KH-EZ 3/4"x4-1/2"	3/4"	4-1/2"	4"	10
KH-EZ 3/4"x5-1/2"	3/4"	5-1/2"	4"	10
KH-EZ 3/4"x7"	3/4"	7"	4"	10
KH-EZ 3/4"x8"	3/4"	8"	4"	10
KH-EZ 3/4"x9"	3/4"	9"	4"	10