

Ground Fault Products
15A, 125V
Circuit Guard® GFCI Receptacles



Features

- Ground fault EOL indicator
- Automatic self-grounding staple
- Open terminal design accepts fork terminals
- Limits improper access to energized contacts

Ordering Information

Description	Device Color	UPC	Catalog Number
Flush, nylon face, back and side wired	White	883778114663	GFTR15W

Listings

Meets UL498 for receptacles
UL943 Class A for GFCIs UL File E41978
CSA Certified


Specifications

Trip Level	4 to 6 mA
Trip Time	.025 second nominal
Frequency	60 Hz
Codes	Meets all NEC® and CEC requirements

Performance

Electrical	
Amperage	15A/20A, 20A Feed Thru
Max. Interrupting Capacity	10,000A
Voltage	120V AC +10% - 15% (102V to 132V)

Environmental	
Maximum Humidity	0.95
Operating Temperature	-35°C to 66°C or -30°F to 150°F.

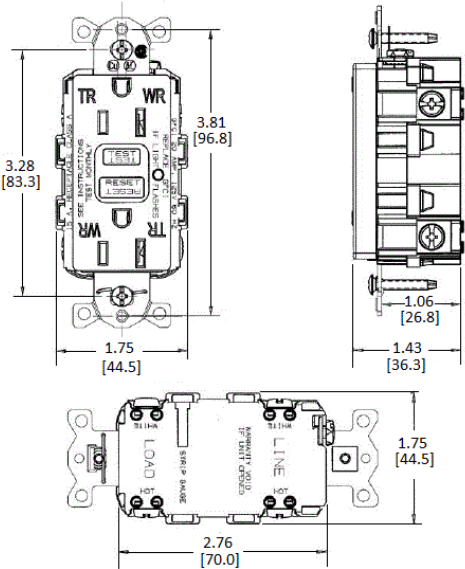

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

