

Twist-Lock® Devices  
30A, 125V AC, 2 Pole, 3 Wire Grounding  
Valise® Connector

HUBBELL



Features

- Powerful cord grips prevent conductor slippage and strain on wiring terminals
- Totally insulated impact and crush resistant nylon body

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Yellow nylon.	.590"-.930" (15.0-23.6)	783585235981	HBL2613VY

Listings


Listed to UL 498  
Fed.Spec. W-C-596  
Certified to CSA C22.2 No.42

Specifications

Housing	Yellow nylon
Contacts	Brass
Terminal Screws	#8 - 32 Steel (Philips / Slotted / Robertson)
Terminal Clamps	Steel - Nickel plated
Clamp Screws	#8 - 32 Steel - Zinc plated (Philips / Slotted / Robertson)

Performance

<b>Electrical</b>	
Current Interrupting	Certified for full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Terminal Accommodation	#14 AWG- #8 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
<b>Environmental</b>	
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperature	Maximum continuous 75°C, minimum -40°C (w/o impact)

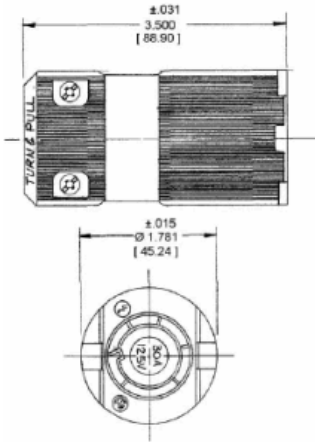

Accessories

Plug	HBL2613VY
Plug	HBL2611VY
Flanged Inlet	HBL2616
Weatherproof Boot	HBL60CM32V

Resources

Customer Use Drawing
eCatalog

