

Twist-Lock® Devices

Mechanical Interlock Replacement Part

Replacement Ground Block



Ordering Information


Description Mechanical Interlock Replacement Part	UPC 783585955148	Catalog Number HBL30RGB
Product Type Replacement Ground Block		

Standards

Listed to UL Standard
CSA Certified TYPE 4, 4X and TYPE 12K Enclosure Rating

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current voltage
Dielectric Voltage Electrical	Withstands 3,000V Min Operations
Mechanical	
Product Identification	Identification and ratings are part of the external label and receptacle face
Terminal Identification	In accordance with UL, CSA
Environmental	
Flammability	Meets UL 94V0 material classification
Moisture Resistance	IP66 suitability
Operating Temperature	Maximum continuous +75°C; Minimum continuous -40°C
UV Resistance	All exposed materials are UV stabilized
In accordance with UL 746C	
Mechanical	Mounting
Mechanical 10,000 cycles;	
Mechanical	Impact Resistance

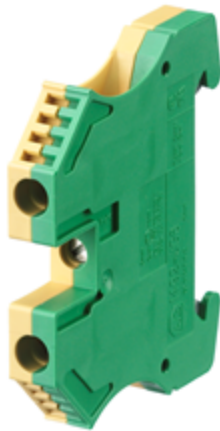

Accessories

Enclosure Accommodation	Hubbell 30A Non-Fused Switched Enclosures and
-------------------------	--

Online Resources

eCatalog

