

Twist-Lock® Devices  
15A, 250V, 2 Pole, 3 Wire Grounding  
Valise® Connector

HUBBELL



Features

- Two captive multiple drive assembly screws
- Totally insulated impact and crush resistant nylon body
- Powerful cord grips prevent conductor slippage and strain on wiring terminals

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Yellow nylon.	.220"-.660" (5.6-16.8)	783585236674	HBL4579VY

Listings

Listed to UL 498  
Fed.Spec. W-C-596  
Certified to CSA C22.2 No.42

Specifications

Housing	Nylon
Cable Inserts	Polyphenylene Oxide
Blades	Brass
Terminal Screws	#6-32 Brass (Phillips / Slotted / Robertson)
Terminal Clamp	Cold rolled steel – nickel plated
Assembly Screws	Steel - Zinc plated

Performance


<b>Electrical</b>	
Current Interrupting	Certified for full rated current
Dielectric Voltage	Withstand 2,000V minimum

<b>Mechanical</b>	
Terminal Accommodation	#18 AWG - #12 AWG stranded copper wire only.

<b>Environmental</b>	
Flammability	HB or better per UL 94 or CSA 22.2 No. 0.6
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C Minimum -40°C (w/o impact)
Terminal Identification	Terminals identified in accordance with UL 498



15A 250V  
NEMA L6-15R  
UL/CSA

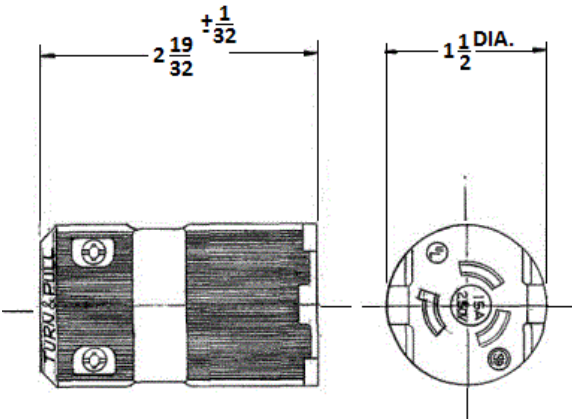

Accessories

Plug	HBL4573VY
------	-----------

Resources

Customer Use Drawing
eCatalog

