

Non-NEMA Twist-Lock® Devices  
 10A, 250V/15A, 125V, 3 Pole, 3 Wire  
 Non-Grounding  
 Insulgrip® Plug

# HUBBELL



## Features

- Individually molded face for each blade configuration keeps debris out of plug interior
- Ribbed nylon housing is impact and chemical resistant
- Roomy wiring chamber provides ample space for wiring

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Yellow and white nylon, Multiple drive screws	.230"-.720" (5.8-18.3)	783585178806	HBL7567CY

## Listings

Fed.Spec.W-C-596  
 Certified to CSA C22.2 No.42

## Specifications

Blade/Contact Carrier	Natural (white) nylon
Terminal Retainer	Clear polycarbonate
Housing	Black nylon
Cord Clamp	Natural (white) nylon
Blades/Contacts	Brass
Grounding Screw	Brass (green finish)

## Performance

### Electrical

Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum


### Mechanical

Terminal Accommodation	#18 AWG - #10 AWG stranded copper wire only.
------------------------	----------------------------------------------

Terminal Identification	Terminals identified in accordance with UL 498
-------------------------	------------------------------------------------

### Environmental

Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

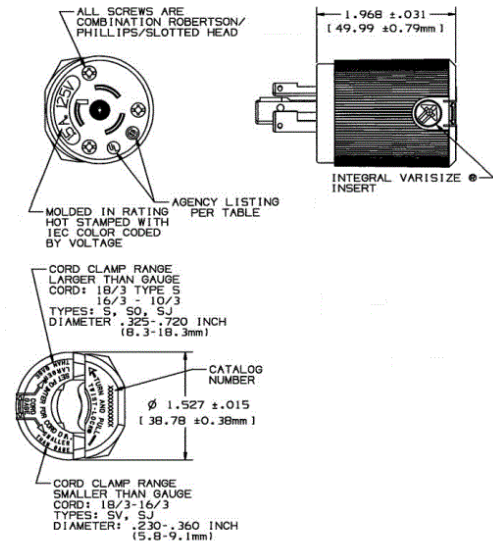

## Accessories

Connector	HBL7565CY
Duplex Receptacle	HBL7580
Single Receptacle	HBL7582
Stainless Steel Flanged Receptacle	HBL7557

## Resources

Customer Use Drawing  
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

