

Aluminum Compression Splice Kits


Aluminum Flood-Seal™ Compression Splice Kits

Dissipate heat and make perfect watertight seals

- Dissipates heat, centers the watertight insulating cover and seals perfectly every time
- Fits snugly for maximum heat dissipation, no tape required
- Install connectors on up to 4/0 cable in only 10 in. of space using UT 3 M or UT 3 tools
- Prevents oxidation and keeps out moisture
- Exceeds ANSI C119.4 requirements and is RUS Accepted



RRK 500

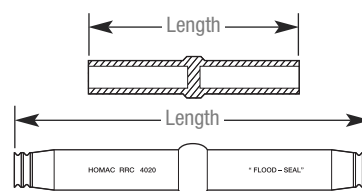

Cat. No.	Colour Code	Wire Size		Connector Length	Insulator Length	Installing Dies	Strip Length
		From	To				
RRK 4	Orange	#4	#4	2	5-1/2	1/2 (3)	1
RRK 2	Red	#2	#2	3	5-1/2	5/8 (5)	1-1/2
RRK 24	Red/Orange	#2	#4				
RRK 1	Red	#1	#1				
RRK 10	Yellow	1/0	1/0				
RRK 102	Yellow/Red		#2				
RRK 20	Grey	2/0	2/0				
RRK 201	Grey/Red		#1				
RRK 202			#2				
RRK 2010	Grey/Yellow		1/0				
RRK 30	Black	3/0	3/0	4-1/4	7-1/4	5/8 (7)	2-1/4
RRK 3010	Black/Yellow		1/0			5/8 (5)	
RRK 3020	Black/Grey		2/0				
RRK 40	Pink	4/0	4/0			5/8 (7)	
RRK 4010	Pink/Yellow		1/0				
RRK 4020	Pink/Grey		2/0				
RRK 4030	Pink/Black		3/0				
RRK 40-840	Pink		4/0				
RRK 250	—	250	250	4-1/2	7-1/2	840, 249, 11A	2-1/4
RRK 300		300	300				
RRK 350		350	350			840, TX, 76, 249, 11A	
RRK 350300			300				
RRK 35040			4/0				
RRK 500			500			500	

For copper splice kits, add "CU" suffix to the catalogue number.



Aluminum Compression Splice Kits

Aluminum Heat-Shrink Compression Splice Kits

Heat-shrink tubing creates sealed, watertight splices

- Dissipates heat, centers the watertight insulating cover and seals perfectly every time
- Crimp the two pieces of wire together, then heat the splice with a hot-air gun to get a fully sealed, watertight repair splice
- Prevents oxidation and keeps out moisture
- Exceeds ANSI C119.4 requirements and is RUS Accepted



RRK 40 HS

Cat. No.	Colour Code	Wire Size		Connector Length	Insulator Length	Installing Dies	Strip Length
		From	To				
RRK 4 HS	Orange	#4	#4	2	5-1/2	1/2 (3)	1
RRK 2 HS	Red	#2	#2	3	5-1/2	5/8 (5)	1-1/2
RRK 24 HS	Red/Orange	#2	#4				
RRK 1 HS	Red	#1	#1				
RRK 10 HS	Yellow	1/0	1/0				
RRK 102 HS	Yellow/Red		#2				
RRK 20 HS	Grey	2/0	2/0				
RRK 201 HS	Grey/Red		#1				
RRK 202 HS			#2				
RRK 2010 HS	Grey/Yellow		1/0				
RRK 30 HS	Black	3/0	3/0	4-1/4	7-1/4	5/8 (7)	2-1/4
RRK 3010 HS	Black/Yellow		1/0			5/8 (5)	
RRK 3020 HS	Black/Grey		2/0				
RRK 40 HS	Pink	4/0	4/0			5/8 (7)	
RRK 4010 HS	Pink/Yellow		1/0				
RRK 4020 HS	Pink/Grey		2/0				
RRK 4030 HS	Pink/Black		3/0				
RRK 40-840 HS	—		4/0				
RRK 250 HS		250	250	4-1/2	7-1/2	840, 249, 11A	2-1/4
RRK 300 HS		300	300				
RRK 350 HS		350	350				
RRK 350300 HS			300				
RRK 35040 HS			4/0				
RRK 500 HS		500	500			6-3/4	

Aluminum Compression Splice Kits

Aluminum Flood-Seal™ Compression Splice Kits

Dual-rated kits approved for a wide range of aluminum or copper connections

- Ensure a fully insulated, watertight repair splice, no tape required
- Prevents oxidation and keeps out moisture



Cat. No.	Connector Wire Size		Splice Cover
	from	to	
FSK 4	#4	#4	FSS 20
FSK 2	#2	#2	
FSK 1	#1	#1	
FSK 1/0	1/0	1/0	
FSK 1/0 R 2		#2	
FSK 2/0 R 1/0	2/0	1/0	
FSK 2/0		2/0	FSS 350
FSK 4/0 R 2/0	4/0		
FSK 3/0	3/0	3/0	
FSK 4/0	4/0	4/0	
FSK 250	250	250	
FSK 300	300	300	

For kits with copper splices or with open-ended splice covers, please consult your Thomas & Betts representative.

Cat. No.	Connector Wire Size		Splice Cover
	from	to	
FSK 350 R 4/0	350	4/0	FSS 500
FSK 350		350	
FSK 400	400	400	
FSK 500 R 4/0	500	4/0	
FSK 500 R 350		350	
FSK 500		500	
FSK 600	600	600	FSS 1000
FSK 750	750	750	
FSK 750 R 500		500	
FSK 1000 R 500	1000	500	
FSK 1000 R 750		750	
FSK 1000		1000	

Aluminum Compression Splice Kits

In-Line Compression Splice Kits

Dual-rated kits include submersible splice cover

- Crimp the two pieces together, then heat the splice with a hot-air gun to get a fully sealed, watertight repair splice
- Fits snugly for maximum heat dissipation
- Ensures a fully insulated, watertight repair splice
- Approved for a wide range of aluminum or copper connections
- Prevents oxidation and keeps out moisture



ULSK 500 HS



ULSK 4/0

Heat-Shrink ULSK-HS, Pre-Sized Heat-Shrink Tubing Included



Cat. No.	Conductor Size
ULSK 6 HS	#6
ULSK 4 HS	#4
ULSK 2 HS	#2
ULSK 1 HS	#1
ULSK 1/0 HS	1/0
ULSK 2/0 HS	2/0
ULSK 3/0 HS	3/0
ULSK 4/0 HS	4/0
ULSK 250 HS	250
ULSK 300 HS	300
ULSK 350 HS	350
ULSK 400 HS	400
ULSK 500 HS	500
ULSK 600 HS	600
ULSK 750 HS	750
ULSK 800 HS	800
ULSK 1000 HS	1000

For reducing kits, please consult your Thomas & Betts representative.

Flood-Seal™ ULSK Series



Cat. No.	Conductor Size	Splice Cover
ULSK 8	#8	FSS 20
ULSK 6	#6	
ULSK 4	#4	
ULSK 2	#2	
ULSK 1	#1	
ULSK 1/0	1/0	FSS 350
ULSK 2/0	2/0	
ULSK 3/0	3/0	
ULSK 4/0	4/0	
ULSK 250	250	
ULSK 300	300	FSS 500 L
ULSK 350	350	
ULSK 400	400	
ULSK 500	500	
ULSK 600	600	
ULSK 750	750	FSS 1000
ULSK 800	800	
ULSK 1000	1000	