

Single Pole Devices and Temporary Power

150A, 600V AC/250V DC

Female Plugs



Features

- Extra Long non-conductive inner sleeve
- Turn and Lock Symbol aids in the mating of devices
- Easily Identifiable Cable with cut off points for secure fit



Ordering Information

Description	Device Color	UPC	Catalog Number
150A, thermoplastic elastomer, cable size #8 - #2 AWG	White	783585458380	HBL15FW

Standards


UL and cUL Listed  
UL Enclosure Types 3R, 4X, 12  
National Electric Code (NEC), ANSI/NFPA 70

Specifications

Base Compound	Thermoplastic Elastomer (TPE)
Contact Material	Brass
Retaining Screw Material	Nylon

Performance

<b>Electrical</b>	
Amperage Rating	150A Maximum
Voltage Ratings	600V AC Maximum; 250V DC Maximum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of device
Terminal Accommodation	#8 to #2 AWG

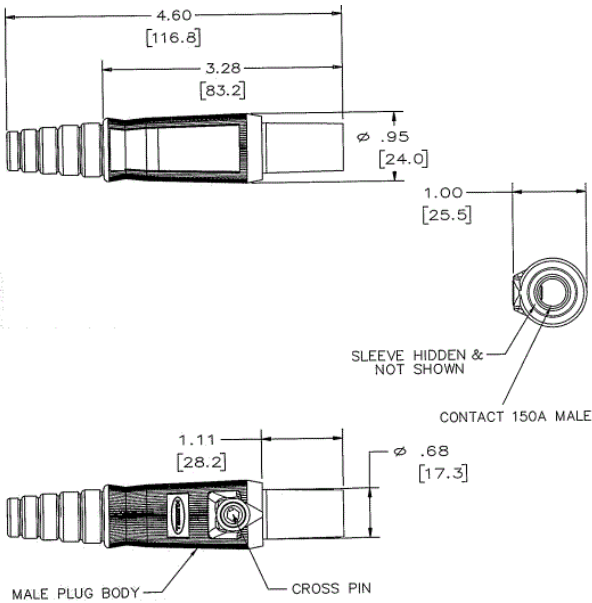

Online Resources

eCatalog

