


Catalog Number	Description	Catalog Numl	oer	Description
1 HBL50010IV	HBL500 Series 10 ft. Base and Cover	5 HBL511IV	· F	90° Flat Elbow
2 HBL500TFIV	Transition Fitting Wiremold® V500 Raceway to Hubbell HBL500 Series Raceway	6 HBL5738IV	(4)	Round Fixture Box with Solid Base
3 HBL504IV	Mounting Strap	7 HBL517IV		Internal Elbow
4 HBL5715IV	Tee	8 HBL5748IV		One-Gang Device Box

Wiremold® is a registered trademark of The Wiremold Company.

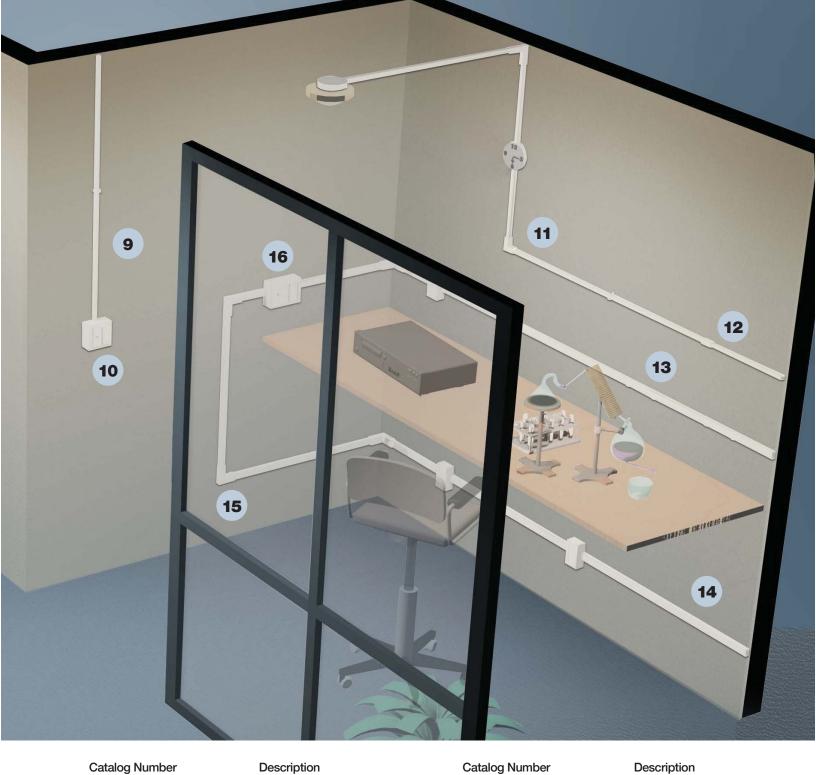

Catalog Number	Description	Catalog Number
9 HBL75010IV	HBL750 Series 10 ft. Base and Cover	13 HBL20GB606IV
10 HBL5744S2IV	Two-Gang Deep Device Box	14 HBL2000BCIV
11 HBL711IV	90° Flat Elbow	15 HBL2011IV
12 HBL750TFIV	Transition Fitting Wiremold® V700 Raceway to Hubbell HBL750 Series Raceway	16 HBL20482IV
\A/'	The AME and All Order	

HBL2000 Series Base 00BCIV and Cover 90° Flat Elbow 1IV 182IV Two-Gang Device Box

Wiremold® is a registered trademark of The Wiremold Company.

Metal PlugTrak® 6 ft. Base

on 6 in. Center

and Cover with 10 Receptacles

### HBL500, HBL750, HBL2000 and PlugTrak® Metal Raceway



#### Innovative Box Design

- Hubbell Handi-Screw eliminates difficult to install long screws for easier installation.
- Rounded corners eliminate sharp edges.
- One seam construction provides "clean" look.
- Box design allows standard wall plates to be mounted flush with virtually no perimeter profile exposed.





#### **Enhanced Datacom Capabilities**

- Allows up to five Category 5e, three Category 6, or two Category 6a cables.
- Available with 1.5 in. Category 6 and 6a bend radious fittings.
- Largest single channel low profile raceway available in its class.
- Ideal for datacom and oversized neutral applications.
- HBL750 Series exclusive to Hubbell.



#### **Transition Fitting**

- UL Classified to transition from Wiremold<sup>®</sup> Metal Surface Raceway to Hubbell Metal Raceway.
- Complete line of transition fittings for HBL500, HBL750 and HBL2000 Series Metal Raceway.



Wiremold® V700 to Hubbell HBL750 Series utilizing Hubbell transition fitting.



# Metal PlugTrak® Featuring Exclusive Receptacle Design

- Gray or ivory scratch resistant finish.
- Multiple spacing configurations.
- Hubbell designed and manufactured single receptacle.
- Insulation displacement wiring provides superior wire retention.
- Mates with HBL2000 Series Metal Raceway.
- Available in 3 ft., 5 ft. and 6 ft. lengths.



Wiremold® is a registered trademark of The Wiremold Company.



#### HBL500 and HBL750 Single Channel Metal Raceway

#### **HBL500 Series Metal Raceway**

#### **Base and Cover**

Available in 5 ft. (1.5m) lengths, packed 50 ft. (15m) per carton and 10 ft. (3m) lengths, packed 100 ft. (30m) per carton. **HBL5701C** coupling furnished with each length.




Catalog Number
HBL5005IV
HBL50010IV
A: .53" (13.46)
B: .76" (19.30)

Lengin	Color
5 ft.	Ivory
10 ft.	Ivory

#### **HBL750 Series Metal Raceway**

#### **Base and Cover**

Available in 5 ft. (1.5m) lengths, packed 50 ft. (15m) per carton and 10 ft. (3m) lengths, packed 100 ft. (30m) per carton. **HBL5701C** coupling furnished with each length.




# Catalog Number HBL7505IV HBL75010IV A: .85" (21.59) B: .76" (19.30)

Length	Color
5 ft.	lvory
10 ft.	lvory

#### Switch and Receptacle Boxes\*

#### Switch and Receptacle Box

For standard switches and receptacles. Single gang box base has two ½ in. trade size KOs. Two gang box base has a rectangular KO and concentric ½ in. and ¾ in. trade size KOs. Three through six gang box bases have one ½ in. trade size KO per gang. Use catalog number HBL5791 for connecting ½ in. EMT to all HBL5700 Series rectangular boxes.

















#### One-Gang HBL5748IV

A: 4.54" (115.32) B: 2.82" (71.63) C: 1.75" (44.45)

#### Two-Gang HBL57482IV

A: 4.54" (115.32) B: 4.64" (117.86) C: 1.75" (44.45)

## Three-Gang HBL57483IV

A: 4.54" (115.32) B: 6.45" (163.88) C: 1.75" (44.45)

#### Four-Gang HBL57484IV

A: 4.54" (115.32) B: 8.26" (209.91) C: 1.75" (44.45)

#### Five-Gang HBL57485IV

A: 4.54" (115.32) B: 10.01" (255.93) C: 1.75" (44.45)


#### Six-Gang HBL57486IV

A: 4.54" (115.32) B: 11.89" (301.96) C: 1.75" (44.45)



#### Switch and Receptacle Boxes\*


Shallow Switch and Receptacle Box For shallow switches and receptacles. Single gang box base has two ½ in. trade size KOs. Two gang box base has a rectangular KO and concentric ½ in. and ¾ in. trade size KOs. Three gang box base has three ½ in. trade size KOs.





#### One-Gang HBL5747IV


A: 4.54" (115.32) B: 2.82" (71.63) C: 1.375" (35.00)





#### Two-Gang **HBL57472IV**

A: 4.54" (115.32) B: 4.64" (117.86) C: 1.375" (35.00)






#### Three-Gang **HBL57473IV**

A: 4.54" (115.32) B: 6.45" (163.88) C: 1.375" (35.00)

#### Deep Switch and Receptacle Box


For deep devices or applications where additional room is beneficial. Single gang box base has two ½ in. trade size KOs. Two gang box base has a rectangular KO and concentric ½ in. and ¾ in. trade size KOs. Three gang box base has three ½ in, trade size KOs.





#### One-Gang HBL5744SIV


A: 4.54" (115.32) B: 2.82" (71.63) C: 2.25" (57.00)





#### Two-Gang **HBL5744S2IV**


A: 4.54" (115.32) B: 4.64" (117.86) C: 2.25" (57.00)






#### Three-Gang **HBL5744S3IV**

A: 4.54" (115.32) B: 6.45" (163.88) C: 2.25" (57.00)



For deep devices (such as momentary contact switches) or applications where additional room is beneficial. Single gang box base has two ½ in. trade size KOs. Two gang box base has a rectangular KO and concentric ½ in. and ¾ in. trade size KOs. Three gang box base has three ½ in. trade size KOs.













#### One-Gang HBL5744IV

A: 4.54" (115.32) B: 2.82" (71.63) C: 2.75" (70.00)

#### Two-Gang **HBL57442IV**

A: 4.54" (115.32) B: 4.64" (117.86) C: 2.75" (70.00)


#### Three-Gang **HBL57443IV**

A: 4.54" (115.32) B: 6.45" (163.88) C: 2.75" (70.00)

\*Notes: For datacom applications, box selection is dependent on depth of connectors (jacks). See pages 54-55 for datacom product selection. Use catalog number HBL5791 for connecting ½ in. EMT to all HBL5700 Series rectangular boxes.

3L500 and HBL750 Single Channel	Metal Racewa	ay		
Specialty Boxes*			Catalog Number	Color
Extension Box or extensions from exisiting flush switch ad receptacle boxes	C B		HBL5751IV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.375" (35.00) HBL5751AIV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.75" (44.45)	lvory
Blank Extension Box or extensions from existing flush switch and receptacle boxes where it is desired to ank original outlet.	A A		HBL5760IV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.13" (28.70)	Ivory
Low Profile Switch and Receptacle Box or low profile switches and receptacles. ase has ½ in. trade size KOs.	A A C C B		HBL5748SIV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.13" (28.70)	lvory
Combination Switch and Receptacle Box For connecting to surface runs of ½ in. trade conduit, one raceway twistout on each side a three raceway twistouts on top and bottom.	% n l⇔   ₹   :		HBL5745IV A: 4.54" (115.32) B: 2.82" (71.63) C: 1.375" (35.00)	Ivory
Utility Box For use as a tee, cross, pull box, junction box or blank box. Base has ½ in. trade size KOs.			HBL57242IV A: 4.12" (104.78) B: 2.00" (50.80) C: 1.39" (35.31)	Ivory
Alarm Device Box For surface mounting of alarm devices and safety signals. Fits 4 in. (102.00) square boxe	A A B		HBL5752IV HBL5752R A: 4.54" (115.32) B: 4.64" (117.86) C: 1.375" (35.00)	Ivory Red
Extra Deep Alarm Device Box For surface mounting of alarm devices and safety signals. Cover is 2.75 in. (70.00) deep. Fits 4 in. (102.00) square boxes.	A A B		HBL5753IV HBL5753R A: 4.54" (115.32) B: 4.64" (117.86) C: 2.75" (70.00)	Ivory Red
Distribution Box Twistouts permit use of three parallel racewaruns on each side. Cover takes devices with			<b>HBL5735IV</b> A: 4.54" (115.32) B: 4.64" (117.86)	lvory

runs on each side. Cover takes devices with  $\mathfrak{P}^{\circ}|_{\mathfrak{D}}$ mounting screw centers of 2.75 in. (70.00), 3.5 in. (89.00), 4.0625 in. (103.00) and canopy fixture not larger than 4.625 in. (117.00). Can be used with 5 HBL5736IV (blank cover) to create junction box.





B: 4.64" (117.86) C: 1.375" (35.00)

<sup>\*</sup>Note: Use catalog number **HBL5791** for connecting ½ in. EMT to all HBL5700 Series rectangular boxes.



6.375 inches

HBL5739AIV


A: 1.02" (26.00)

B: 6.375" (162.00)

#### Round Extension and Fixture Boxes\*

Extension Box with Open Base

For mounting on 3.25 in. (83.00) or 4 in. (102.00) conduit boxes or other recessed outlets.



HBL5737IV A: 1.02" (26.00) B: 4.75" (120.65)

4.75 inches



**HBL5738IV** HBL5738AIV A: 1.02" (26.00) A: 1.02" (26.00)



**Outside Diameter** 

5.50 inches

HBL5737AIV

A: 1.02" (26.00)


B: 5.50" (140.00)

**HBL5739IV** A: 1.02" (26.00) B: 6.375" (162.00)



#### Fixture Box with Solid Base

To hang fixtures. Cover takes any device with mounting screw centers of 2.75 in. (70.00), 3.5 in. (89.00) and 4.06 in. (103.00). Can be used as a pull or junction box when used with HBL5736IV (blank cover).



B: 4.75" (120.65)

**Catalog Number** 


A: 1.02" (26.00) B: 3.00" (76.00)



#### Other Round Boxes and Covers\*

#### **Outlet Box**

For devices with mounting screw centers of 1.47 in. (37.00), 1.63 in. (41.00), 1.69 in. (44.00) or 1.84 in. (46.00). Will take device that mounts on G or H type conduit fittings.





## HBL5733IV

Color Ivory


Color

Ivory

Ivory

#### **Blank Cover**

For use with HBL5733IV. Has 1/2 in. trade size KO in center.






#### HBL5731IV

A: .24" (6.10) B: 2.40" (60.96) Ivory

#### **Blank Cover**

For use with HBL5735IV, HBL5737IV, HBL5737AIV, HBL5739AIV, HBL5738IV, HBL5738AIV and HBL5739IV. Has ½ in. trade size KO in center.






#### HBL5736IV

A: .38" (9.75) B: 4.19" (106.30) Ivory

#### Fanbox with Solid Base

Cover accepts fan bracket with mounting centers of 3.2 in. (81.00). Rated for fans and fixtures up to 50 lbs.






#### HBL5738AFIV

A: 1.02" (26.00) B: 4.76" (120.90) **Ivory** 

#### Round Fixture Box for **Audible Alarms**

For installing round audible alarms.





#### HBL5739AABIV

A: 1.62" (41.15) B: 6.50" (165.10) Ivory

\*Note: Use catalog number HBL5791 for connecting ½ in. EMT to all HBL5700 Series round boxes (except HBL5733IV and HBL5739AABIV).



#### HBL500 and HBL750 Single Channel Metal Raceway


#### **HBL500 Series HBL750 Series Color Fittings** Internal Elbow HBL517IV HBL717IV Ivorv A: 3.33" (84.51) A: 3.33" (84.51) For inside surface B: .58" (14.73) B: .90" (22.86) at right angles. C: 3.33" (84.51) C: 3.33" (84.51) **External Elbow** HBL518IV HBL718IV Ivory A: 2.59" (65.71) A: 2.59" (65.71) For outside surfaces B: .58" (14.73) B: .90" (22.86) at right angles. C: 2.59" (65.71) C: 2.59" (65.71) 90° Flat Elbow HBL511IV HBL711IV Ivory A: 2.68" (68.13) A: 2.68" (68.13) For right angle turns B: .61" (15.50) B: .90" (22.86) on same surface. C: 2.68" (68.13) C: 2.68" (68.13) 45° Flat Elbow HBL512IV HBL712IV Ivory A: 2.46" (62.61) A: 2.70" (68.49) For diagonal 45° turns B: .58" (14.73) B: .91" (23.06) on same surface. C: 2.46" (62.61) C: 2.70" (68.49) **Mounting Strap** HBL504IV HBL704IV Ivory A: .58" (14.73) A: .90" (22.86) (one- or two-hole) B: .50" (12.70) B: .50" (12.70) For mounting HBL500 or HBL750 Raceway to surface. Convert to one-hole by breaking off at score. Zinc Bushing HBL502B HBL702B A: .35" (8.83) A: .60" (15.24) Plated Protect wires from B: .70" (17.68) B: .70" (17.68) potential abrasion. Steel Fits into end of HBL500 or HBL750 Raceway. **Connection Cover** HBL506IV HBL706IV **Ivory** A: .60" (15.24) A: .91" (23.10) To cover potential B: .80" (20.31) B: .80" (20.31) openings where two lengths of HBL500 or HBL750 Raceway come together. **Transition Fitting** HBL500TFIV HBL750TFIV Ivory A: .65" (16.51) A: .98" (24.89) For transitioning from B: .89" (22.61) B: .89" (22.61) either Wiremold® V500 to C: 2.15" (54.61) C: 2.15" (54.61) Hubbell HBL500 Raceway or Wiremold® V700 to Hubbell HBL750 Raceway.

#### **Fittings**

#### Internal Elbow - Bend Radius

For inside surface at right angles requiring a 1.5 in (38.1mm) bend radius.

Suitable for Category 5, 5e, 6 and 6a applications.






#### HBL500 and HBL750 Series Color

HBL5717BRIV

A: 3.33" (84.51) B: .91" (23.11) C: 3.33" (84.51) Ivory

#### External Elbow - Bend Radius

For outside surfaces at right angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.




HBL5718BRIV

A: 4.86" (123.43) B: .78" (19.80) C: 1.35" (34.28) Ivory

#### Flat Elbow - Bend Radius

For right angle turns requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.




HBL5711BRIV

A: 3.16" (80.34) B: .91" (23.11) C: 3.16" (80.34) Ivory

# Tee - Bend Radius For branches at right

angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.



#### HBL5715BRIV

A: 5.55" (140.88) B: .90" (22.86) C: 3.16" (80.34) Ivory

#### Tee

For branches at right angles.




#### **HBL5715IV**

A: 3.06" (77.67) B: 1.14" (28.86) C: 3.03" (76.96) Ivory

Ivory

#### **Internal Twisted Elbows**

For 90° twist with 90° turn. For double turn at right angles from one to another. From a flat run on a sidewall to a flat run on a ceiling, edge of door or window trim.



#### Right Elbow HBL5711RHIV

A: 2.98" (75.72) B: .94" (23.75) C: 3.00" (76.20)

## Left Elbow HBL5711LHIV

A: 2.98" (75.72) B: .94" (23.75) C: 3.00" (76.20)

#### **Corner Box**

For connecting HBL500 or HBL750 Raceway from ceiling or corner. Each leg of base has ½ in. trade size KO.




#### **HBL5719IV**

A: 2.50" (63.50) B: 2.50" (63.50) C: 2.40" (60.96) Ivory

#### Coupling

For joining and supporting lengths of HBL500 or HBL750 Raceway.





#### HBL5701C

A: 2.00" (50.80)


Galvanized Steel



#### HBL500 and HBL750 Single Channel Metal Raceway HBL500 & HBL750 Series Color **Fittings** Support Clip HBL5703IV Ivory A: 2.51" (63.75) For supporting lengths of HBL500 or HBL750 Raceway. **Elbow Box Connector** HBL5783IV Ivory A: 2.13" (54.05) For connecting raceway at right B: 1.24" (31.50) angles to conduit boxes, panel boxes, etc. having KO for trade size conduit. **Elbow Conduit Connector** HBL5784IV **Ivory** A: 2.13" (54.05) For connecting raceway at right B: 1.24" (31.50) angles to 1/2 in. trade size conduit or armored cable connectors.

#### Combination Connector

For connecting raceway, without offsetting, to any 3.25 in. (83.00) or 4 in. (102.00) outlet box mounted on the surface with a KO for ½ in. trade size conduit. Spring steel bushing (included) eliminates need for conduit nipple and locknut.





## HBL5785IV

A: 1.64" (41.78) B: 1.27" (32.26) C: 2.90" (73.72)

# Ivory

#### Adjustable Offset Connector

Two ½ in. KOs for panel or conduit connection. Eliminates offsetting raceway when connecting to surface type panel boxes. One ½ in. chase nipple and locknut furnished.






#### **HBL5786IV**

A: 1.50" (38.10) B: 1.84" (46.74) C: 3.89" (98.87)

#### Ivory

#### **Entrance Connector**

One ¾ in. KOs for panel or conduit connection. One ¾ in. chase nipple and locknut furnished.





#### HBL5786AIV

A: 1.50" (38.10) B: 1.84" (46.74) C: 3.89" (98.87) Ivory

#### Flexible Section

For getting around offsets, side bends, twisted turns or curved surfaces.





#### HBL5700FIV

A: 18.00" (457.20)

Ivory



#### UL Listed, CSA Certified

#### **Fittings**

#### **Box Connector**

For connecting raceway to conduit boxes or panel boxes having KO for conduit. May also be used for conduit type fittings.



#### HBL500 & HBL750 Series

#### HBL5781

1/2" (12.7) Male A: .75" (19.1) B: 1.24" (31.62)

#### HBL5781A 3/4" (19.1) Male A: .75" (19.1)

Zinc Plated Steel

Color

#### **Conduit Connector**

For connecting raceway to conduit.



#### **HBL5782C**

1/2" (12.7) Female A: .75" (19.1) B: 1.75" (44)

#### **HBL5782A**

B: 1.24" (31.62)

34" (19.1) Female A: .75" (19.1) B: 1.75" (44)

#### Zinc Plated Steel

#### **Grounding Clamp**

Provides grounding means for ½ in. trade size conduit using locknut.





#### HBL5709GC

A: 1.04" (26.03) B: 1.18" (29.84) Galvanized Steel

#### Special Nipple

For hanging or connecting either .375 in. (9.5) or .5 in. (12.7) fixtures to Hubbell fittings with ½ in. trade size KOs.





#### HBL5780

A: .63" (16.00)

Zinc Plated Steel

## **Armored Cable Connector**

For connecting 14/2, 14/3, 12/2 and 12/3 "MC" and armored cable to Hubbell fittings. A short piece of HBL500IV/ **HBL750IV** Raceway must be used between this connector and the Hubbell fitting. Not for connection to ½ in. (12.7) flex conduit.



#### **HBL5790B** A: 2.00" (50.80)

B: .99" (25.25)

Galvanized Steel

#### **Ground Clamp**

Used to provide additional grounding of raceway or to around remotely located devices. Attach ground wire to screw as required by National Electrical Code.



#### HBL5709


A: 2.00" (50.80)

Galvanized Steel

#### **Tools**

#### Cutter

Portable cutter for HBL500 and HBL750 Series Raceways.



#### HBL500 Series HBL750 Series

#### HBL605CUT

A: 19.70" (499.30) B: 20.00" (508.00) HBL607CUT

A: 19.64" (498.76) B: 20.00" (508.00)





#### HBL605K

A: 4.31" (109.51) B: 1.50" (38.04)

#### HBL607K

A: 4.31" (109.51) B: 1.76" (44.78)

#### Raceway Bender

Portable bender for HBL500 and HBL750 Series Raceways.



#### HBL600B

A: 35.47" (901.03) B: 9.41" (238.99)

#### HBL600B

A: 35.47" (901.03) B: 9.41" (238.99)

#### **Touch-Up Paint**

Touch-Up Paint Pen



#### HBL500 & HBL750 Series

**HBLIWEP** 

Color

Ivory



13

#### **HBL2000 Series Metal Raceway**

Raceway			Catalog Number	Length	Color
Single Channel Base and Cover Cover is 0.025 in. (0.635mm) thick up to 300V AC applications. Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.	C		HBL2000BCIV HBL2000BCGY A: 60.00" (1524.00) B: 1.31" (33.27) C: .83" (21.08)	5 ft.	Ivory Gray
Single Channel Base and Cover Cover is 0.040 in. (1.016mm) thick up to 600V AC or higher capacity power applications (up to 25 #12AWG wires). Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.	A C B		HBL2000BCAIV HBL2000BCAGY A: 60.00" (1524.00) B: 1.31" (33.27) C: .83" (21.08)	5 ft.	Ivory Gray
Base Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.	A I'B		HBL2000B5IV HBL2000B5GY A: 60.00" (1524.00) B: 1.31" (33.27)	5 ft.	Ivory Gray
Cover Cover is 0.025 in. (0.635mm) thick up to 300V AC applications. Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths	A		HBL2000CIV HBL2000CGY A: 60.00" (1524.00) B: 1.31" (33.27)	5 ft.	Ivory Gray
Cover Cover is 0.040 in. (1.016mm) thick up to 600V AC or higher capacity power applications (up to 25 #12AWG wires). Packed 50 ft. (15m) per carton, 5 ft. (1.5m) lengths.	A A		HBL2000CAIV HBL2000CAGY A: 60.00" (1524.00) B: 1.31" (33.27)	5 ft.	lvory Gray
Wire Clip (Plated) For holding conductors in place. For use with HBL2000CIV/GY Cover Only.	B C		HBL2000WC A: .44" (11.18) B: .24" (6.03) C: 1.24" (31.50)		Galvanized Steel
Wire Clip (Plated) For holding conductors in place. For use with HBL2000CAIV/GY Cover Only.	B	N	HBL2000WCA A: .44" (11.18) B: .60" (15.17) C: 1.24" (31.50)		Galvanized Steel
Coupling (Plated) For joining lengths of HBL2000 Raceway.	A Contract of the Contract of		<b>HBL2001C</b> A: 2.00" (50.80)		Galvanized Steel
Supporting Clip For supporting lengths of HBL2000 Racev at any point. Mount with #6 flat head faste Has set screw for locking to raceway.	- W / C / M /		HBL2003SC A: 2.00" (50.80)		Galvanized Steel
Boxes			Catalog Number		Color
One-Gang Device Box For deep switches and receptacles. Base has one ½ in. trade size KO and rectangular KO for extension to wall box.	A A B C C		HBL2048IV HBL2048GY A: 4.54" (115.32) B: 1.75" (44.45) C: 2.82" (71.63)		Ivory Gray
Two-Gang Device Box For deep switches and receptacles. Base has one ½ in. trade size KO and rectangular KO for extension to wall box.	B C		HBL20482IV HBL20482GY A: 4.54" (115.32) B: 1.75" (44.45) C: 4.64" (117.86)		lvory Gray


		UL Listed, C	SA Certified
Fittings Internal Corner Coupling For surfaces at right angles, or for use as		Catalog Number  HBL2017TC  A: 1.30" (32.98)	<b>Color</b> Galvanized Steel
straight-through fitting. Furnished with on fiber bushing.	e A	B: 1.40" (35.56)	
Internal Elbow-Bend Radius For inside surface at right angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.	B	HBL2017BRIV HBL2017BRGY A: .85" (21.56) B: 3.47" (88.11)	Ivory Gray
External Elbow Coupling For right angle turns around external corners.	i A	HBL2018CIV HBL2018CGY A: 1.88" (47.75)	lvory Gray
External Elbow-Bend Radius For outside surfaces at right angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.	A	HBL2018BRIV HBL2018BRGY A: 5.11" (129.72)	Ivory Gray
90° Flat Elbow For right angle turns on same surface.		HBL2011IV HBL2011GY A: 2.56" (65.02)	lvory Gray
Flat Elbow-Bend Radius For branches at right angles requiring a 1.5 in. (38.1mm) bend radius. Suitable for Category 5, 5e, 6 and 6a applications.		HBL2011BRIV HBL2011BRGY A: 4.29" (109.03)	lvory Gray
Tee Fitting For branches at right angles. Couplings furnished.	A C	HBL2015IV HBL2015GY A: 6.00" (152.40) B: 2.81" (71.44) C: 4.00" (101.60)	lvory Gray
Tee Fitting-Bend Radius For branches at right angles. Couplings furnished. Suitable for Category 5, 5e, 6 and 6a applications.	A B	HBL2015BRIV HBL2015BRGY A: 7.35" (186.78) B: 4.33" (110.00)	lvory Gray
Blank End Fitting For closing open end of HBL2000 Raceway.		HBL2010BIV HBL2010BGY A: .78" (19.94)	Ivory Gray
Entrance End Fitting For connecting HBL2000 Raceway with one ½ in. conduit and armored cable connectors.	c] A B	HBL2010A2IV HBL2010A2GY A: 3.01" (76.45) B: 1.30" (33.02) C: 1.49" (37.85)	lvory Gray
Large Capacity Entrance End Fitting Offers larger capacity than HBL2010A2IV/GY. One ½ in. trade size KOs on end, each side and bottom.	C	HBL2010A3IV HBL2010A3GY A: 3.69" (93.80) B: 2.02" (51.18) C: 1.79" (45.36)	lvory Gray
	•/		

#### HBL2000 Series Metal Raceway

#### **Fittings**

#### **Ground Clamp (Plated)**

For connection of equipment grounding conductor to provide an additional ground to raceway.





#### **Catalog Number**

#### HBL2009GC

A: 1.00" (25.64)

Color

Galvanized Steel

#### **Cover Clip**

Use to cover potential openings where two pieces of HBL2000 Raceway cover come together.





HBL2006IV HBL2006GY

A: .75" (19.05)

Ivory Gray

#### **End Reducing Connector**

For connecting HBL2000 Raceway to HBL500 Raceway through end of HBL2000 Raceway.






#### HBL2089EIV

A: .78" (19.81)

Ivory

#### **Side Reducing Connector**

For connecting HBL2000 Raceway to HBL500 Raceway through side of HBL2000 Raceway.





#### **HBL2089IV**

A: 6.00" (152.40) B: 3.25" (82.55)

Ivory

#### Flush Plate Adaptor

For feeding HBL2000 Raceway from an existing wall outlet.





#### HBL2051HIV HBL2051HGY

A: 4.50" (114.30)

**Ivory** Gray

#### **Transition Fitting**

For transitioning from Wiremold® 2000 Raceway to Hubbell HBL2000 Raceway.






#### HBL2000TFIV HBL2000TFGY

A: .82" (20.71) B: 1.38" (35.12) C: 2.04" (51.82) Ivory Gray

#### Cutter

#### Cutter

Portable cutter for HBL2000 Series Raceway.






#### Catalog Number

#### HBL620C

A: 19.64" (498.83) B: 20.00" (508.00)

**Cutter Replacement Blade** 



HBL620BCK

A: 4.50" (115.06) B: 1.10" (27.94)

#### **Touch-Up Paint**

Touch-Up Paint Pen



#### Catalog Number

**HBLIWEP HBLGWEP**  Ivory Gray

Color

Wiremold® is a registered trademark of The Wiremold Company. Hubbell Inc. is not affiliated with The Wiremold Company.