

Calbrite™

Stainless Steel Conduit Systems

Stainless Steel Split Ring Clamps

Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless steel Rigid / IMC, aluminum, galvanized, & PVC coated conduit
- Includes two type 316 stainless steel bolts
- No package qty. required

Certifications and Compliances:



Complies with Manufacturers' Standardization Society MSS SP-58 & SP-69
Meets Federal Specifications WW-H-171.

Applications:

Calbrite's stainless steel Split Ring Clamps are designed for mounting and securing conduit, horizontally or vertically, away from the wall or device in wash-down or corrosive environments when used with Calbrite's Mounting Plates and Extensions.

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical
- Pulp & Paper Mills
- Marine & Coastal Facilities
- Along with other corrosive environments

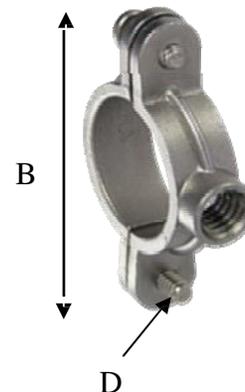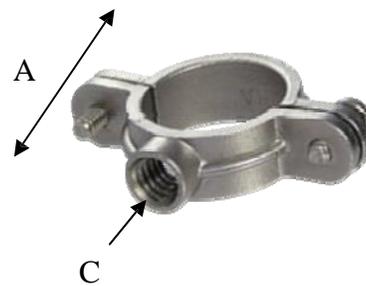

Size	Part Number	A (Height)	B (Length)	C (Female Thread)	E (Bolt Size)	Thickness	Weight (ea) per lb.
1/2"	S60500SP00	1.16"	2.18"	.375"	#10 x 1/2"	.125"	0.09
3/4"	S60700SP00	1.41"	2.50"	.375"	#10 x 1/2"	.125"	0.11
1"	S61000SP00	1.75"	2.70"	.375"	#10 x 1/2"	.135"	0.14
1-1/4"	S61200SP00	2.03"	3.23"	.375"	#10 x 1/2"	.140"	0.16
1-1/2"	S61500SP00	2.42"	3.50"	.375"	#10 x 1/2"	.150"	0.20
2"	S62000SP00	2.87"	3.92"	.375"	#10 x 1/2"	.150"	0.23
2-1/2"	S62500SP00	3.65"	5.00"	.500"	1/4"-20	.160"	0.50
3"	S63000SP00	4.25"	5.76"	.500"	1/4"-20	.210"	0.75
4"	S64000SP00	5.30"	6.83"	.500"	1/4"-20	.250"	1.13

All dimensions are for informational purposes only *Tolerances +/- 5%