



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE		REEL QTY.	COLOR (DIN)	MAX. WIRE INSUL. DIA.	WIRE CLASS	DIMENSIONS in. [mm]				CP-881 INSERTS	SCA-71202 2002 (CA10) DIE SET	UNI-M DIE SET	** UNI-M INSERTER KIT
	AWG	[mm ²]					L	P	OD (REF.)	ID				
* FSD73-8-K	24	[0,25]	1000	YELLOW	.07 [1,8]	B, K, M	.57 [14,5]	.31 [8,0]	.05 [1,3]	.03 [0,8]	--	--	ALL ONE DIE SET	--
* FSD74-8-K	22	[0,34]	1000	TURQUOISE	.07 [1,8]	B, K, M	.57 [14,5]	.31 [8,0]	.05 [1,3]	.03 [0,8]	CP-881-KIT4			
+ FSD75-8-K	20	[0,50]	1000	WHITE	.09 [2,4]	B, K, M	.57 [14,5]	.31 [8,0]	.06 [1,4]	.04 [1,1]	WHITE INSERTS	SCA-71200 2005WE (CD10-1)	ALL ONE DIE SET	APM-K008701
FSD76-8-K	18	[0,75]	1000	GRAY	.10 [2,6]	B, K, M	.57 [14,5]	.31 [8,0]	.06 [1,6]	.05 [1,3]	GRAY INSERTS			APM-K008175
FSD77-8-K	-	[1,0]	1000	RED	.11 [2,8]	B, K, M	.57 [14,5]	.31 [8,0]	.07 [1,8]	.06 [1,5]	RED INSERTS	SCA-71200 2006WE (CD10-2)	ALL ONE DIE SET	APM-K006667
FSD78-8-K	16	[1,5]	1000	BLACK	.13 [3,2]	B, K, M	.57 [14,5]	.31 [8,0]	.08 [2,1]	.07 [1,8]	BLACK INSERTS			
FSD80-8-DK	14	[2,5]	500	BLUE	.15 [3,9]	B, K, M	.57 [14,5]	.31 [8,0]	.10 [2,6]	.09 [2,3]	BLUE INSERTS	SCA-71200 2007WE (CD10-3)	ALL ONE DIE SET	APM-K008585

* NOT UL LISTED, UL486F SCOPE IS 20 - 1/0 AWG. TURQUOISE IS DIN COLOR FOR 22 AWG [0,34].
 FOR CP-881 TOOL, FSD74-8-K ONLY WORK FOR 22G WIRE.
 + UL LISTED WITH 20 AWG ONLY, WHITE IS DIN COLOR FOR 20 AWG [0,5]
 ** INSERTER KIT OPTIONAL.

NOTES:

- USED FOR:
 - UL LISTED WITH STRANDED COPPER WIRE 20 - 1/0 AWG ONLY
 - 221°F (105°C) MAX. OPERATING TEMPERATURE
- INSTALLATION TOOLS PANDUIT APPROVED:
 - CA10 APPLICATOR WITH CP-871 OR EQUIVALENT PRESS
 - CP-881 STRIP AND CRIMP UNIT
 - SCA-712022002 (CA10) APPLICATOR WITH UC200 OR EQUIVALENT PRESS
 - UNI-M APPLICATOR (APM-MRSP1516JMD) WITH UC200 OR EQUIVALENT PRESS
- WIRE STRIP LENGTH: 13/32 ^{+1/32}₋₀ [10 ^{+0,8}₋₀]
- MATERIAL:
 - STAMPING: COPPER, TIN PLATED
 - HOUSING: POLYPROPYLENE, COLOR CODED
 - COLOR CODE CONFORMS TO DIN STANDARD
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- PARTS CONFORM TO DIN 46228 PART 4

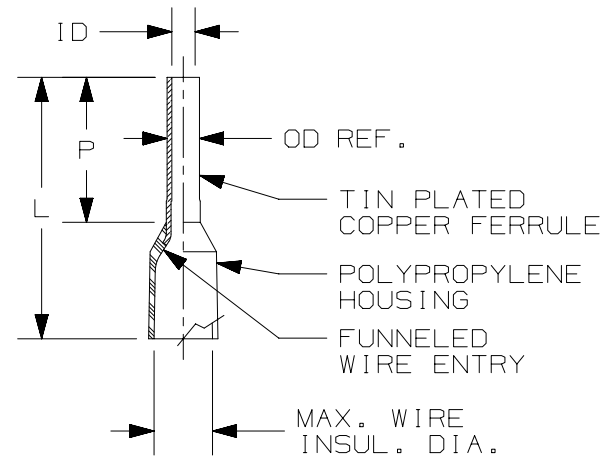

LISTED E472545



CERTIFIED LR31212

TITLE	
FERRULES WITH SLEEVES ON MINI REEL (DIN)	
CUSTOMER DRAWING	
ITEM REVISION NAME	N41755BA/10
DATASET FILE NAME	N41755BA_DC/10
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	MATERIAL: SEE NOTES
.X ± .XX ±	.XXX ± ANGLES ±
THIRD ANGLE PROJECTION	DRAWING NUMBER: A41755
DRAWN BY: SRB	DATE: 01.11
CHK	SCALE: N.T.S.
SHEET 1 OF 1	
A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
10	10.24.18	FCHE	TMR	JADE	ADDED INSERT CP-881-KIT4 FOR FSD74-8-K	041964
09	9.27.18	FCHE	TMR	RGB	UPDATED RANGE OF UNI-M DIE SET TO INCLUDE FSD73 AND FSD74 SIZES MAX WIRE INSUL. DIA OF FSD73-8-K .07" WAS .08"	040535
08	6.12.18	BJPU	JEH	JADE	ADDED NEW SCHLEUNIGER P/N'S AND UNI-M APPLICATOR	034733
07	6.05.15	TMR	TMR	RGB	ADDED WIRE CLASS TO TABLE	N41755BA-DC
06	03.06.15	JHNU	TMR	RGB	FSD76 WAS 20AWG, FSD77 WAS 18AWG	N41755BA-DC
05	12.05.14	JHNU	TMR	RGB	ADDED cULus LOGO REVSIED NOTE 1A, ADDED NOTE 4C	N41755BA-DC

D10100DA/12