

16/20A & 30/32A

60/63A

KEY	16/20 AMPERE						30/32 AMPERE						60/63 AMPERE					
	3 WIRE		4 WIRE		5 WIRE		3 WIRE		4 WIRE		5 WIRE		3 WIRE		4 WIRE		5 WIRE	
a ϕ	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES
b	51	1.99	58	2.26	64	2.50	66	2.57	68	2.57	72	2.81						
c ϕ	17	.66	17	.66	17	.66	24.5	.96	24.5	.96	24.5	.96						
d	71	2.77	79	3.08	85	3.32	93	3.63	93	3.63	99	3.63						

DIMENSIONS IN INCHES SCALE = NONE & MM
 ϕ = DIAMETER

SERIES I CATALOGS
 SPLASHPROOF CONNECTORS

16A	32A	16A OR 20A	30A OR 32A
C316C4S	C332C4S	C316C6SVLM2	C332C6SVLM2
C316C6S	C332C6S		
C416C6S			
C516C6S	C532C6S		

SERIES II CATALOGS
 SPLASHPROOF CONNECTORS


20A	30A	60A
C520C6S	C530C6S	C560C6S
		C460C9S

REVISIONS


1	5-1-88 "X" REMOVED. LAST "X" REV. WAS "X-0" DCN 4033-2
2	ADD CAT. C532C6S DCN4033-3 BK 9/5/86 CHIP P.
3	9/9/03 ADD CAT. C316C6SVLM2 & C332C6SVLM2 PER DCN 11089 RCM JVD
4	ADDED SERIES II CATALOGS 16/20 AMPERE DIMENSIONS PER DCN. 13739 T.O.V 2-21-07
5	5/19/09 ADDED "C460C9S" TO TABLE PER DCN 15768 RCM DJP

DRAFT SPECIFICATIONS

DRAFT - X° MAX DRAFT UNLESS OTHERWISE SPECIFIED, INTERPRETED AS FOLLOWS:

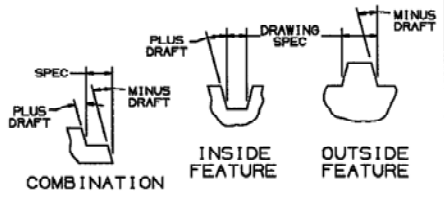

"IN ACCEPTING OUR DRAWINGS OR BLUEPRINTS FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN, AND THAT YOU WILL MAKE NO USE OF OUR DRAWINGS OR BLUEPRINTS OR OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR PERMISSION."



ISO STANDARD FOR 3rd ANGLE PROJECTION
 DO NOT SCALE DRAWING
 USE DIMENSIONS ONLY

TITLE
 PIN & SLEEVE
 SPLASHPROOF CONNECTORS

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX ± .01 .XXX ± .005 .XXXX ± .0025 ANGLE TOL. ± 1°	WIRING DEVICE DIVISION HUBBELL INCORPORATED BRIDGEPORT, CT. DR. BY <i>S. J.</i> APP. BY TR. BY SCALE CHK. BYCHIP P. DATE 4/4/96
PROJECT NO.	

DR. NO.
M-7449
 SHEET 1 OF 1